

EE3621: Digital Signal Processing

Lecture 27: IIR filter design - Impulse invariance (III B.Tech EEE)

September 23, 2026

1. LEARNING OBJECTIVES

By the end of this lecture, students will be able to:

1. **Derive** the Impulse Invariance mapping formula for simple and repeated poles.
 2. **Transform** continuous transfer functions $H_a(s)$ into discrete transfer functions $H(z)$.
 3. **Analyze** the mechanism and severity of spectral aliasing.
 4. **Determine** when Impulse Invariance is applicable in practical filter design.
-

2. MATHEMATICAL FOUNDATIONS

2.1 Pole Mapping Derivation

Given analog transfer function in partial fraction form:

$$H_a(s) = \sum_{k=1}^N \frac{A_k}{s - p_k}$$

The continuous impulse response is:

$$h_a(t) = \sum_{k=1}^N A_k e^{p_k t} u(t)$$

Sampling at $t = nT_d$ with gain scaling T_d :

$$h[n] = T_d h_a(nT_d) = T_d \sum_{k=1}^N A_k e^{p_k nT_d} u[n] = T_d \sum_{k=1}^N A_k (e^{p_k T_d})^n u[n]$$

Taking the Z-Transform of $h[n]$:

$$H(z) = T_d \sum_{k=1}^N \frac{A_k}{1 - e^{p_k T_d} z^{-1}}$$

2.2 Pole-Mapping Properties

- Let $p_k = \sigma_k + j\Omega_k$.

- Discrete pole: $z_k = e^{p_k T_d} = e^{\sigma_k T_d} e^{j\Omega_k T_d}$.
- **Magnitude:** $|z_k| = e^{\sigma_k T_d}$.

* If $\sigma_k < 0$ (Left-half s -plane) $\implies |z_k| < 1$ (Inside unit circle $\implies$ **Stable**). * If $\sigma_k = 0$ ($j\Omega$ axis) $\implies |z_k| = 1$ (On unit circle). * If $\sigma_k > 0$ (Right-half s -plane) $\implies |z_k| > 1$ (Outside unit circle $\implies$ **Unstable**).

Pictorial Representations

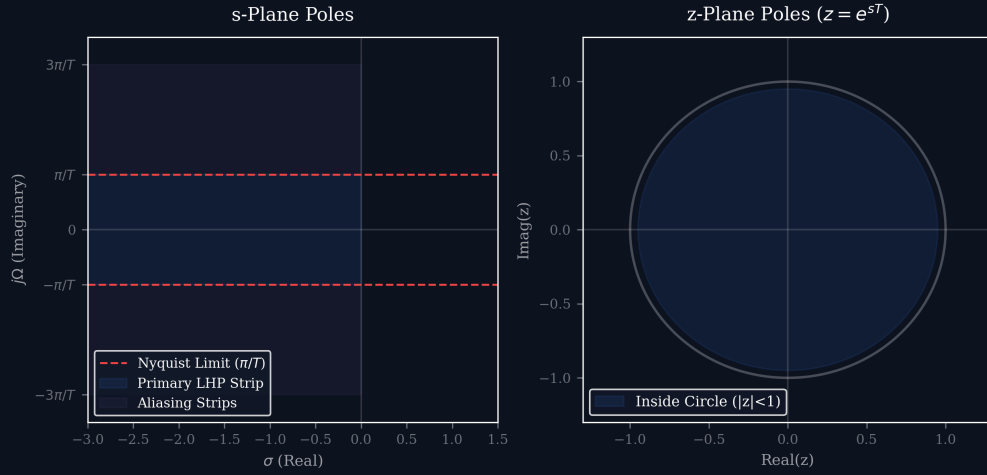


Figure 1: Impulse Invariance Mapping

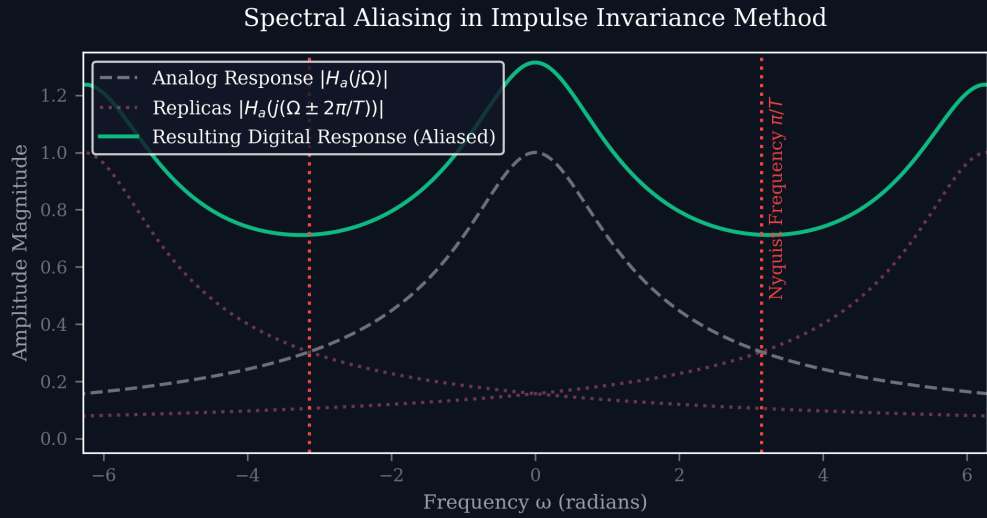


Figure 2: Aliasing Demonstration

3. WORKED NUMERICAL EXAMPLES

Example 27.1: Impulse Invariance Transformation

Problem: Apply the Impulse Invariance method to design a digital filter from:

$$H_a(s) = \frac{s+1}{(s+1)^2+9} = \frac{s+1}{(s+1-3j)(s+1+3j)}$$

with sampling interval $T_d = 0.1$ s.

Solution:

1. Partial Fraction Expansion:

$$H_a(s) = \frac{0.5}{s+1-3j} + \frac{0.5}{s+1+3j}$$

Poles: $p_1 = -1 + 3j$, $p_2 = -1 - 3j$.

1. Apply Impulse Invariance Mapping:

$$z_1 = e^{p_1 T_d} = e^{(-1+3j)(0.1)} = e^{-0.1} e^{j0.3} = 0.9048 e^{j0.3} = 0.9048(\cos 0.3 + j \sin 0.3) = 0.8644 + 0.2674j$$

$$H(z) = T_d \left[\frac{0.5}{1 - e^{p_1 T_d} z^{-1}} + \frac{0.5}{1 - e^{p_2 T_d} z^{-1}} \right] = 0.1 \left[\frac{1 - e^{-0.1} \cos(0.3) z^{-1}}{1 - 2e^{-0.1} \cos(0.3) z^{-1} + e^{-0.2} z^{-2}} \right]$$

$$H(z) = \frac{0.1 - 0.08644z^{-1}}{1 - 1.7288z^{-1} + 0.8187z^{-2}}$$