

EE3621: Digital Signal Processing

Lecture 30: Equalization and noise cancellation and adaptive FIR filter (III B.Tech EEE)

September 23, 2026

1. LEARNING OBJECTIVES

By the end of this lecture, students will be able to:

1. **Formulate** channel equalization systems for dispersive digital communication links.
 2. **Derive** the LMS adaptive filter algorithm from the Mean Square Error (MSE) cost function.
 3. **Analyze** convergence speed vs. steady-state misadjustment trade-offs governed by step-size μ .
-

2. MATHEMATICAL FOUNDATIONS

2.1 Channel Equalization

When a digital symbol sequence $s[n]$ passes through a dispersive channel $C(z)$ with additive noise $v[n]$:

$$r[n] = s[n] * c[n] + v[n]$$

- **Zero-Forcing Equalizer (ZF):**

$$E_{\text{ZF}}(z) = \frac{1}{C(z)}$$

Drawback: Inverts channel nulls, causing catastrophic noise enhancement.

- **Minimum Mean Square Error (MMSE) Equalizer:**

$$E_{\text{MMSE}}(e^{j\omega}) = \frac{C^*(e^{j\omega})}{|C(e^{j\omega})|^2 + \frac{S_{vv}(\omega)}{S_{ss}(\omega)}}$$

2.2 Adaptive Noise Cancellation & The LMS Algorithm

- **System Model:**

* Primary input: $d[n] = s[n] + n_0[n]$ ($s[n]$ is desired signal; $n_0[n]$ is noise). * Reference input: $x[n] = n_1[n]$ (correlated with $n_0[n]$, uncorrelated with $s[n]$). * Adaptive filter output: $y[n] = \mathbf{w}^T[n]\mathbf{x}[n] = \sum_{k=0}^{M-1} w_k[n]x[n-k]$. * Error signal: $e[n] = d[n] - y[n] = s[n] + (n_0[n] - y[n])$.

- **Cost Function:**

$$J(\mathbf{w}) = E[e^2[n]] = E[s^2[n]] + E[(n_0[n] - y[n])^2]$$

Minimizing $E[e^2[n]]$ forces $y[n] \rightarrow n_0[n]$, so $e[n] \rightarrow s[n]$.

- **LMS Weight Update Equation:**

$$\mathbf{w}[n+1] = \mathbf{w}[n] + 2\mu e[n]\mathbf{x}[n]$$

- **Stability Condition:**

$$0 < \mu < \frac{1}{\text{Tr}(\mathbf{R})} = \frac{1}{M \cdot E[x^2[n]]} = \frac{1}{MP_x}$$

Pictorial Representations

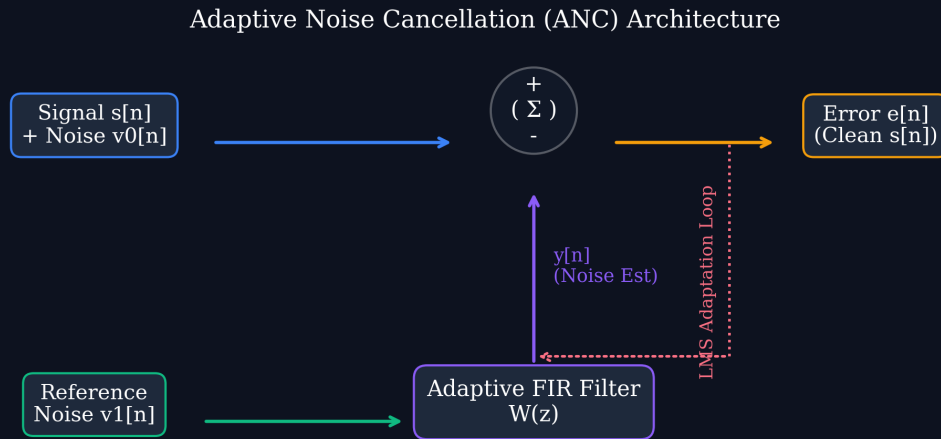


Figure 1: Adaptive Noise Cancellation

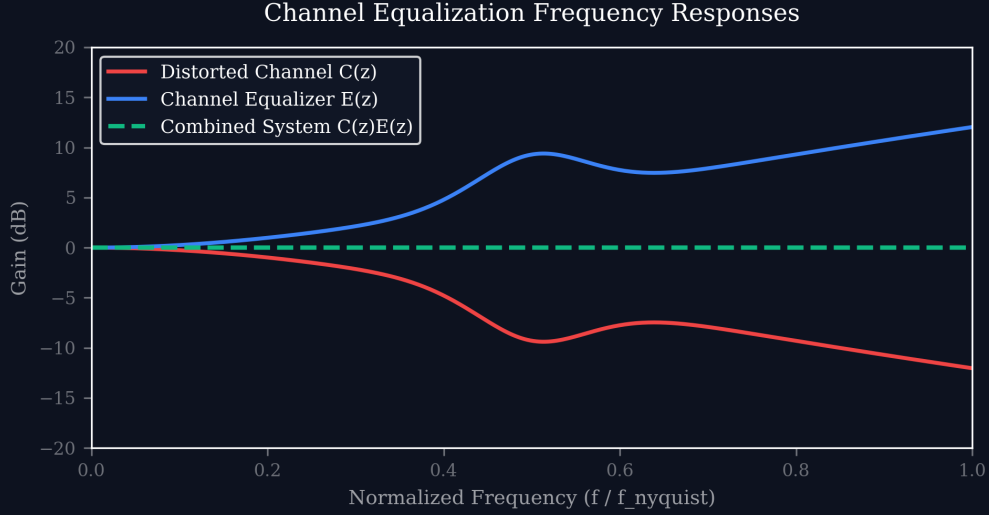


Figure 2: Equalizer Response

3. WORKED NUMERICAL EXAMPLES

Example 30.1: LMS Weight Convergence Calculation

Problem: A 2-tap adaptive LMS filter is used for noise cancellation with step size $\mu = 0.01$. The input reference noise has power $P_x = E[x^2[n]] = 2.0$ W. (a) Verify the stability of the adaptation step size. (b) Given current weights $\mathbf{w}[n] = [0.5, -0.2]^T$, reference vector $\mathbf{x}[n] = [1.0, 0.5]^T$, and primary signal $d[n] = 1.2$, compute the updated weights $\mathbf{w}[n+1]$.

Solution: (a) **Stability Check:** Maximum stable step size:

$$\mu_{\max} = \frac{1}{MP_x} = \frac{1}{2 \times 2.0} = \frac{1}{4.0} = 0.25$$

Since $\mu = 0.01 < 0.25$, the adaptive algorithm is **guaranteed to be stable and converge**.

(b) **Weight Update:**

1. Filter Output:

$$y[n] = \mathbf{w}^T[n]\mathbf{x}[n] = 0.5(1.0) + (-0.2)(0.5) = 0.5 - 0.1 = 0.4$$

1. Error Signal:

$$e[n] = d[n] - y[n] = 1.2 - 0.4 = 0.8$$

1. Weight Update:

$$\mathbf{w}[n+1] = \mathbf{w}[n] + 2\mu e[n]\mathbf{x}[n] = \begin{bmatrix} 0.5 \\ -0.2 \end{bmatrix} + 2(0.01)(0.8) \begin{bmatrix} 1.0 \\ 0.5 \end{bmatrix} = \begin{bmatrix} 0.5 \\ -0.2 \end{bmatrix} + 0.016 \begin{bmatrix} 1.0 \\ 0.5 \end{bmatrix}$$

$$\mathbf{w}[n+1] = \begin{bmatrix} 0.5 + 0.0160 \\ -0.2 + 0.0080 \end{bmatrix} = \begin{bmatrix} \mathbf{0.5160} \\ \mathbf{-0.1920} \end{bmatrix}$$