Set up a Blixt X.

For the owner or installer. Blixt X connects inverters, batteries and meters to Sourceful, and is set up in the app like a Zap.

00 BEFORE YOU START

- **Network** — Ethernet or Wi-Fi with internet.
- **The app, signed in** — With a profile and a site.
- **Device list** — Model, IP, port, unit ID.
- **Bluetooth on** — Stand close to the gateway.

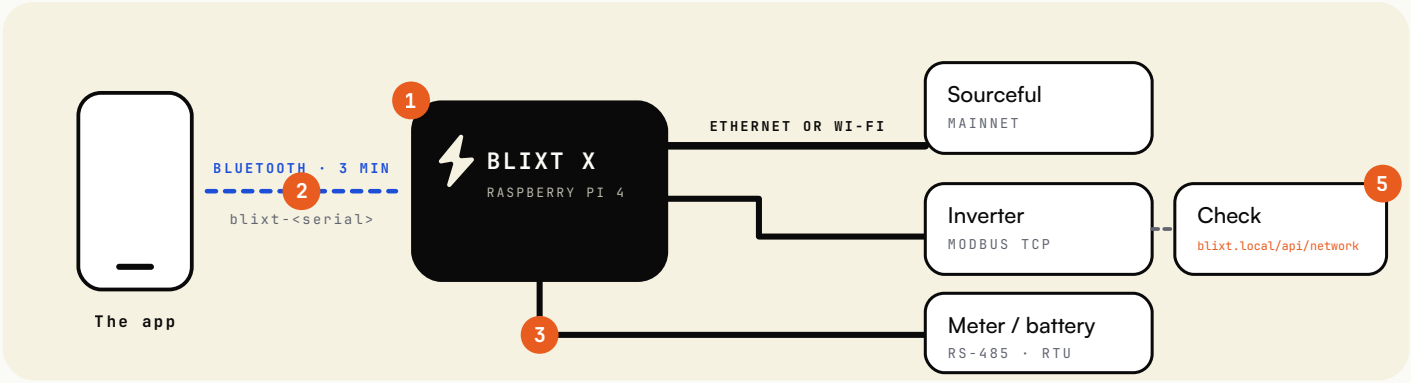

1 Start

Power on. Ethernet: plug in the cable. Wi-Fi: set in the app in step 4.

Blixt X has no status lights to read. The check is step 5.

2 The Bluetooth window

After start it shows up as **blixt-<serial>** for **3 minutes**.

Missed it: hold the button 3 s or double-click. Or cut the power and start again.

3 Connect the devices

TCP devices on the same network, with a fixed IP. RTU devices on the gateway's RS-485 port.

One Modbus master per device. Stop other systems that read the same device.

4 In the app

SAME FLOW AS ZAP

1. **Onboard a new Zap** — Under **Get started**, or **More → My Zaps**. The app says Zap.
2. **Pick blixt-…** — Within 3 minutes of start. Most bars if you see several.
3. **Claim & Configure network** — The gateway joins the profile you have selected.
4. **Wi-Fi** — Network, password, **Connect**. Hidden: **Enter manually**.
5. **Done** — Name it if you like.
6. **Devices** — **More → Energy devices**, then type, model, IP, port and unit ID.

5 Done when

YOU SEE THIS	IF NOT
✓ `internetConnected: true` And `mqttConnected: true` at **http://blixt.local/api/network** from the same network.	**Not in the app** — The Bluetooth window has closed. The button or a restart opens it again.
✓ `/api/devices` Lists the devices you added.	`blixt.local` **does not answer** — With several on the network it is `blixt-…local`. Or use its IP address.
✓ **The app** Shows data from the devices.	`mqttConnected: false` — No internet access. Check the network and the firewall.
	A device does not answer — Wrong IP, port or unit ID, Modbus TCP off, or another master.

GOOD TO KNOW

The app says Zap. Every screen in the flow says Zap. It is the right flow for Blixt X.

Ethernet only? On 2.0.1 the app does not see Ethernet and shows the Wi-Fi step anyway. Ask Sourceful.

3.0.0
NEXT VERSION

This page covers 2.0.1, the version running in the field in October 2026.

In 3.0.0, devices are added with drivers from Sourceful's registry. This page changes when it ships.