Set up a Blixt X.

For the owner or installer. Blixt X is our software on the RAK gateway, the former dual miners. It is set up in the app like a Zap.

00 BEFORE YOU START

- **Ethernet** — With internet. Wi-Fi is optional.
- **The app, signed in** — With a profile and a site.
- **Device list** — Model, IP, port, unit ID.
- **The power adapter** — USB-C, 5 V, 2.4 A.

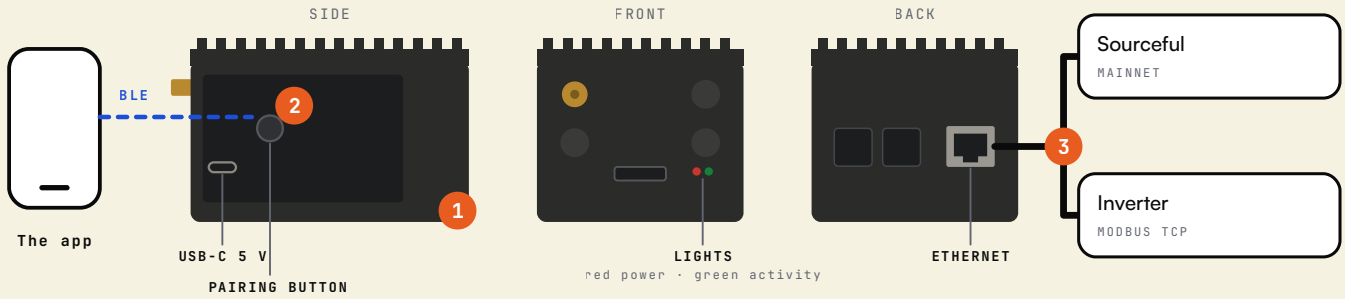

1 Start

Antenna on. Ethernet in the back. Power in the USB-C on the side. Wi-Fi is optional and not recommended.

Red light solid: power. Green blinks while the system works.

2 The Bluetooth window

After start it shows up as **blixt-<serial>** for **3 minutes**.

Missed it: hold the **pairing button** 3 s or double-click, or restart it.

3 Connect the devices

Modbus TCP on the same network, with a fixed IP. The RAK gateway has no RS-485 or P1 port.

One Modbus master per device. Stop other systems that read it.

4 In the app

SAME FLOW AS ZAP

1. **Onboard a new Zap** — Under **Get started**, or **More → My Zaps**. The app says Zap.
2. **Pick blixt-...** — Within 3 minutes of start. Most bars if you see several.
3. **Claim & Configure network** — The gateway joins the profile you have selected.
4. **The Wi-Fi step** — On Ethernet: tap back. It is already registered.
5. **No cable** — Network, password, **Connect**, then **Done**.
6. **Devices** — **More → Energy devices**, then type, model, IP, port and unit ID.

5 Done when

YOU SEE THIS

- ✓ `internetConnected: true` — And `mqttConnected: true` at **http://blixt.local/api/network** from the same network.
- ✓ `/api/devices` — Lists the devices you added.
- ✓ **The app** — Shows data from the devices.

IF NOT

- **Not in the app** — The Bluetooth window closed. Press the pairing button, or restart.
- **Red light blinks** — The power supply is too weak. Use a 5 V, 2.4 A adapter.
- `mqttConnected: false` — No internet access. Check the network and the firewall.
- **A device does not answer** — Wrong IP, port or unit ID, Modbus TCP off, or another master.

GOOD TO KNOW

The app says Zap. Every screen says Zap. It is the right flow.

The Wi-Fi step on Ethernet 2.0.1 does not report Ethernet, so the app shows the step anyway. Back out of it.

3.0.0 NEXT VERSION

This page covers 2.0.1, the version running in the field in October 2026.

In 3.0.0, devices are added with drivers from Sourceful's registry. This page changes when it ships.