

uCNC RP2350B Motherboard

200 x 150 mm | two-layer | 1.6 mm | socketed WeAct RP2350B

TOP ASSEMBLY

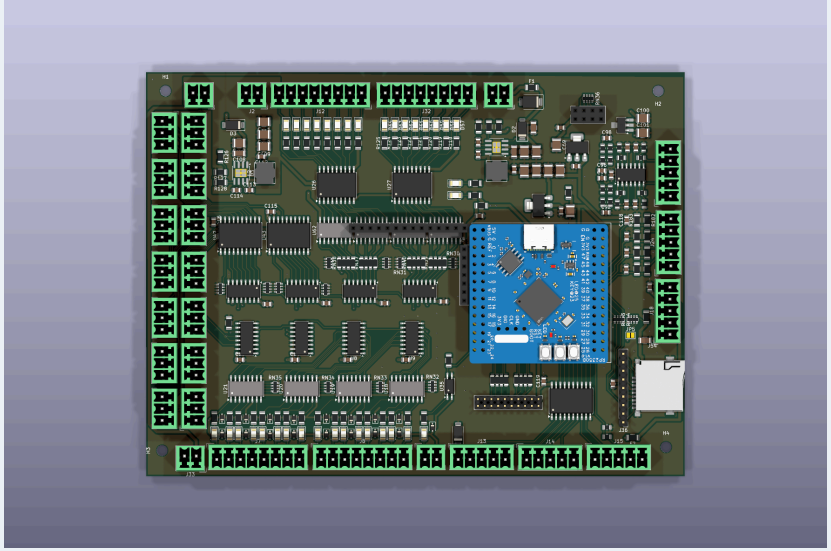

BOTTOM SIDE

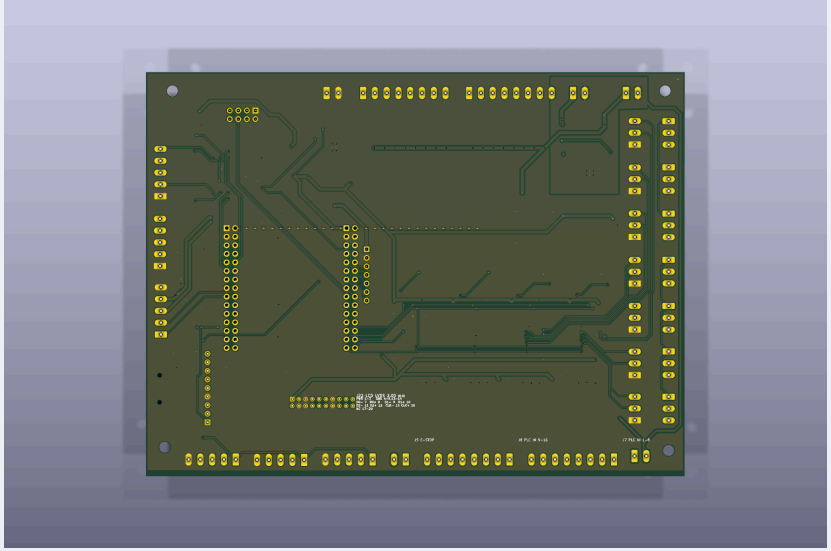

Contents: board specification, front artwork and mirrored rear artwork.

Prototype documentation - not safety certified. Generated from the current KiCad board.

uCNC RP2350B Motherboard Specification

Generated review documents:

- Combined board review
- Front artwork and assembly layer
- Mirrored rear artwork
- Current top 3D render
- Current bottom 3D render

Board summary

Item	Specification
Product	LeanCam NCC / uCNC RP2350B Motherboard
Status	Routed prototype; manufacturing review outstanding
Controller	Socketed WeAct Studio RP2350B Core Board
PCB outline	200 mm x 150 mm
PCB construction	Two copper layers, 1.6 mm nominal FR-4
Mounting	Four M3 clearance holes
Assembly	Main population on F.Cu; J22 is also on F.Cu
Main input	12-24 V DC machine supply
Main logic rail	LMR36510 5 V, 1 A synchronous buck
Peripheral logic	AMS1117-3.3, `+3V3`
Wi-Fi supply	Dedicated AMS1117-3.3, `+3V3_WIFI`
Analog-output rail	L78L12, `+12V_AO`
Isolated field rail	External 24 V through J33/J45
Backlight rail	LMR36510 isolated 24 V to `+12V_BL`

The board is a machine-control carrier, not a safety-rated controller. Hazardous output power must be removed through an independent hard-wired safety circuit.

Digital I/O

Function	Capacity	Implementation
Isolated PLC inputs	16	U18-U21 TLP291-4, RN32-RN35 pull-ups
Dedicated E-stop	1	U35 TLP291 and R74 pull-up
Servo ZERO inputs	7	Direct 3.3 V logic into U6/U7
Servo ERROR inputs	7	Direct 3.3 V logic into U6/U7
General field outputs	16	U61-U64 optocouplers into U26/U27 TBD62083AFG arrays
Motion outputs	7 axes	STEP/DIR, with grouped `EN_3AX` and `EN_4AX` enables
Encoder inputs	3	A/B/Z, 5 V to 3.3 V through U28
Analog inputs	4	0-10 V resistor dividers into RP2350 ADC pins
Analog outputs	4	TLV2374 and two-stage RC filters
Storage	2 interfaces	J36 breakout or on-board J54 socket

The input chain runs from U6 to U7 to U8 to U9 and returns on GPIO23. U8/U9 carry PLC inputs 1-16, while U6/U7 carry the seven paired servo ZERO/ERROR signals. The output chain runs from GPIO20 through U13, U12, U11 and U10. GPIO21 is the shared shift clock and GPIO22 is the 74AHCT595 latch.

The exact register-bit assignments are in Input and output bit map.

Field I/O

J33 and J45 are parallel two-pin access points for `+24V_FIELD` and `ISO_GND`. The isolated field domain supplies PLC contact wetting and the general-output side and has no connection to motherboard GND.

Each PLC input contains one connector-side indicator LED, 2.2 k field resistor, reverse diode and TLP291-4 channel. Each four-channel group has one RN32-RN35 4 x 10 k logic-side pull-up network. The dedicated E-stop has its own indicator, series resistor, reverse diode and TLP291 channel.

The sixteen general outputs are generated by four 4 x 1 k network arrays, optically isolated through U61-U64 and switched by U26/U27. The output arrays are low-side switches; external loads must be supplied from the isolated field rail and kept within the TBD62083AFG package limits.

E-stop is an input to the controller only. It does not locally interrupt motion or general-output power.

Motion and encoders

J10, J11, J28, J29, J30, J46 and J47 expose the seven STEP/DIR axes. Each connector also carries the applicable grouped enable:

- `EN_3AX` is shared by AX0-AX2.
- `EN_4AX` is shared by AX3-AX6.

The 3.3 V 74AHCT595 outputs drive two TC74AC541F buffers powered from 5 V. The buffers provide the 5 V STEP, DIR and enable outputs.

J40-J43 and J48-J50 are paired 3-pin axis inputs with `GND`, `ERROR` and `ZERO`. J13-J15 are 5 V encoder connectors. U28 converts the 5 V A/B/Z push-pull signals to 3.3 V logic; open-collector encoders require external pull-ups.

Display, storage and expansion

J22 is a 2 x 10, 2.00 mm LCD interface on F.Cu. It carries four HSTX differential channels through RN26/RN27 4 x 330 ohm arrays. Pins 1-6 supply 3.3 V and ground, pins 7-16 carry D0, D1, D2 and clock, and pins 17-20 are unconnected.

J2 carries isolated `+12V_BL` and `ISO_GND` for the backlight. PWM switching, current limiting, any CCFL inverter and high-current LED drive remain off board.

J36 accepts a passive Open-Smart 3.3 V TF Card Breakout. J54 is a SOFNG TF-15x15 `C111196` microSD socket wired in parallel. Fit either card interface for use and never insert a card into both simultaneously. RN43 provides pull-ups and RN44 provides 22 ohm series resistors; JP5 enables the card-detect switch.

J51 exposes GPIO4-GPIO8, `+3V3` and GND on a 1 x 7, 2.54 mm socket. J20 accepts an ESP-01 or ESP-01S on the separately regulated `+3V3_WIFI` rail.

Power

The main logic path is protected by F1, D1 and D2. U1 converts the protected input to `+5V`; the WeAct module is supplied from that rail and uses its onboard 3.3 V regulator. U2 supplies the motherboard peripheral rail, and U34 supplies the optional ESP module independently.

U3 converts the isolated 24 V field input to `+12V_BL` and is protected by D3. U37 creates the low-current `+12V_AO` rail for U38 and the four 0-10 V outputs. All regulator loops, bulk capacitors, bypass capacitors and feedback networks are documented in Decoupling map.

The main switching return, peripheral logic and analog return share one GND plane. `ISO_GND` remains a separate isolated domain.

Connector inventory

Ref	Function
J1	12-24 V DC input
J2	Isolated backlight `+12V_BL` / `ISO_GND`
J5	Isolated E-stop loop
J7, J8	PLC input signals 1-16
J10, J11, J28, J29, J30, J46, J47	Seven STEP/DIR axis outputs
J12, J32	General outputs DO0-DO15
J33, J45	Parallel isolated field +24 V / return
J13-J15	Three encoder interfaces
J40-J43, J48-J50	Seven paired servo status inputs
J18	5-pin I2C interface
J20	ESP-01/ESP-01S socket
J22	2 x 10 LCD LVDS interface
J24	Four 0-10 V analog inputs plus ground
J25	Four 0-10 V analog outputs plus ground
J36	1 x 9 TF-card breakout header
J51	GPIO expansion socket
J54	On-board SOFNG TF-15x15 microSD socket


Complete pinouts are in Connector map.

Verification


Current KiCad 10 checks:

- Schematic: 281 components and 320 nets, with no connectivity failures.
- PCB: 275 footprints, 2,262 routed track segments and 189 vias.
- DRC: zero unconnected items; 55 errors and 183 warnings remain.
- Error classes: 28 clearance, 23 starved thermal and 4 courtyard overlap.
- Warning classes: silkscreen, text height, dangling copper and minor mechanical checks.
- ERC: no electrical errors; 35 library-symbol cache warnings.

The board is a routed prototype and must not be released to fabrication until the DRC findings and isolated-field clearances have been reviewed.

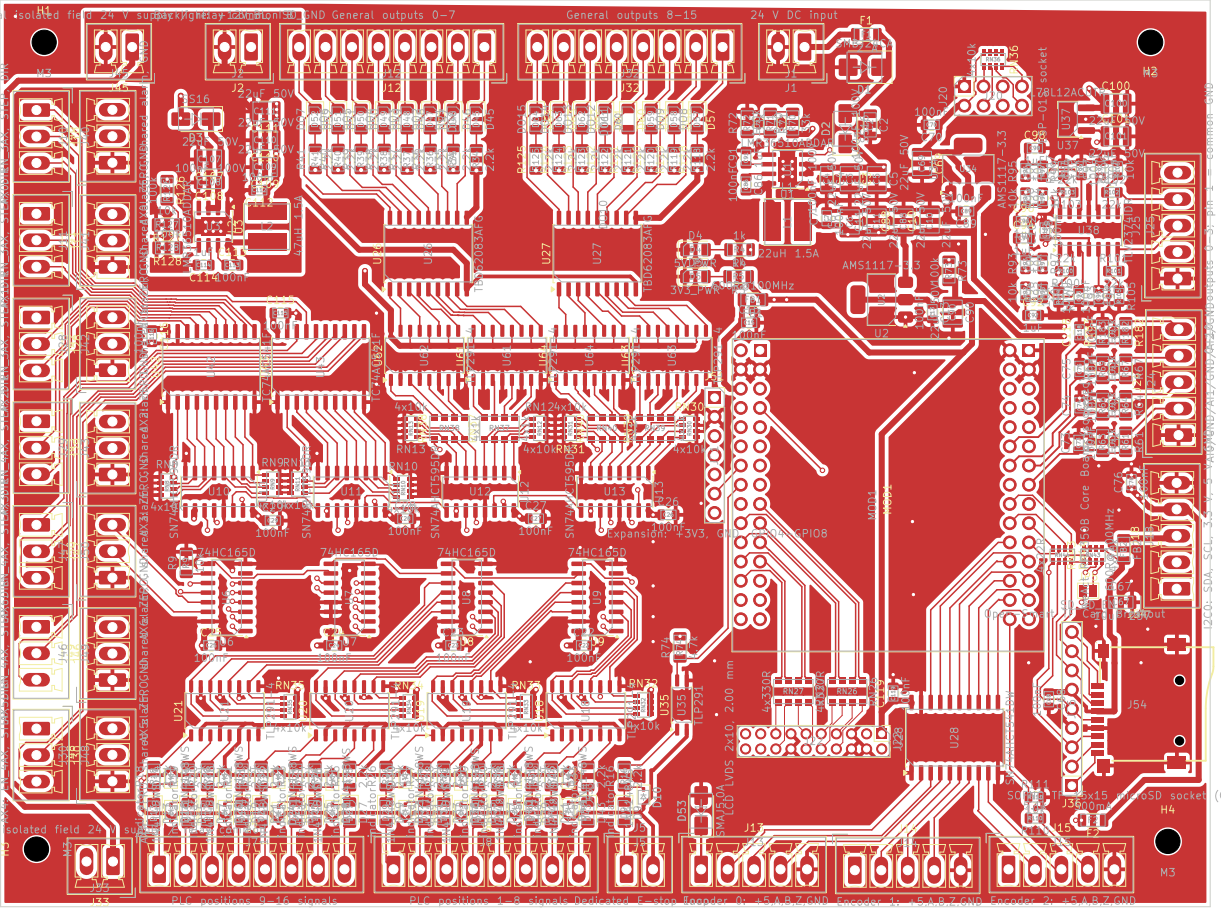

FRONT - F.Cu / F.Silkscreen / F.Fab

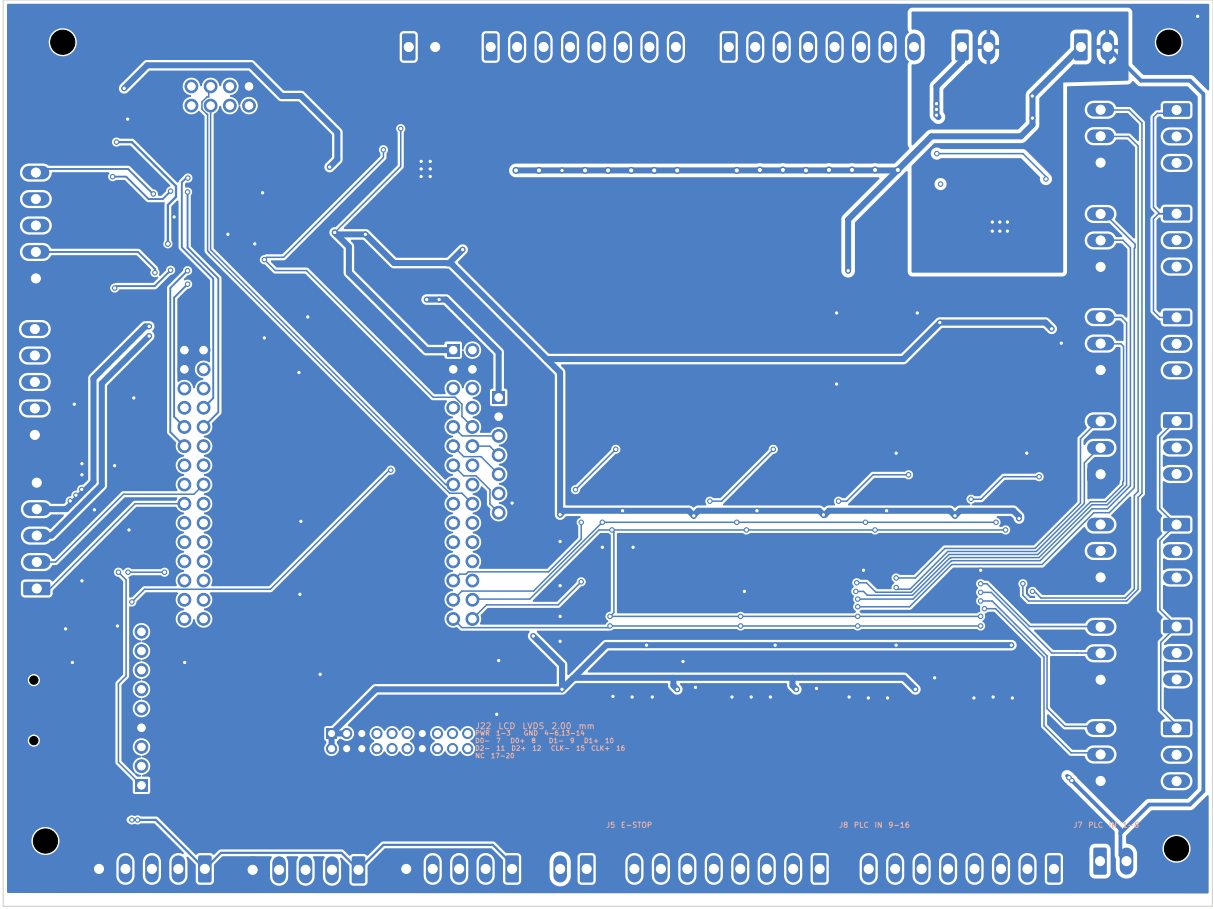

BACK - B.Cu / B.Silkscreen / B.Fab (viewed from back)