

# Model Based Optimal Tuning of Proportional Resonant Controllers

Topic number: 5

**Abstract**—The paper considers the optimal choice of gains of proportional-resonant controllers. A converter, controlled in closed loop, but without proportional resonant controllers, is modeled as a second order transfer function from reference to output. The closed-loop system is amended by proportional-resonant control by feeding the error between reference and output back through a set of  $N$  proportional resonant controller to subsequently alter the reference. The root locus of the closed loop system is considered as a function of the proportional-resonant gains. To find the optimal choice of gains, we consider maximizing the damping of the mode with smallest damping. This corresponds to solving a nonlinear min-max problem. After linearization and reformulation, the problem is stated as a linear program.

## I. INTRODUCTION

Uninterruptable power source (UPS) systems are used in industrial processes in order to decouple loads partially from the grid. Short power outages are compensated and the load is supplied with a clean voltage waveform. Furthermore, UPS systems mitigate the injection of current harmonics to the utility grid that originate from high power non-linear loads. Consequently, converters for UPS applications are required to have a very high output voltage quality even in presence of highly non-linear loads such as diode rectifiers.

The system efficiency is a key aspect of such systems. Usually, very low semiconductor switching frequencies in the range of 2-4 kHz are employed in order to limit the switching losses and keep the efficiency high. Passive filter components such as inductors and capacitors are minimized such that further power losses are avoided. The filtering performance of these passive filters is usually poor for low order harmonics of non-linear loads. Therefore, the output voltage quality has to be ensured by means of proper control.

Due to the low switching frequency, the closed loop voltage control bandwidth is limited and usually not sufficient to cope with non-linear loads. Additional means of compensating the voltage harmonics are required such as harmonic compensators tuned at the specific harmonic frequencies. Harmonic compensators can be implemented e.g. with proportional resonant (PR) controllers suggested in [1]–[7].

Although the performance of proportional resonant controllers in compensating harmonics was investigated extensively, only few publications deal with the proper selection and tuning of the gains of the PR controllers. [8] and [9] provide analytical parameter tuning rules, but only for a system

with single PR controllers tuned at the fundamental frequency. For systems containing several PR controllers tuned at the harmonic frequencies, approximate and empiric parameter tuning rules are given in [1] and [4]. In [6], it is suggested to investigate the bode-plot of the open loop transfer function and design for phase margin. However, this approach should only be applied to closed-loop systems that can be represented as a second order system. Due to the introduction of the harmonic compensators, additional poles are introduced and the system is turned into a high order system. Designing for phase margin can lead to unexpected closed loop system behavior in that case.

Summarizing, no systematic parameter tuning approach considering the interactions of the individual PR controllers and the impact on the damping of the resonant modes is given.

In this paper, a method is presented to optimally choose the gains of the PR controllers. The root locus of the closed loop system is considered as a function of the proportional-resonant gains. To find the optimal choice of gains, we consider maximizing the damping of the mode with smallest damping. This corresponds to solving a nonlinear min-max problem. After linearization and reformulation, the problem is stated as a linear program which can be solved efficiently.

## II. CONVERTER MODEL

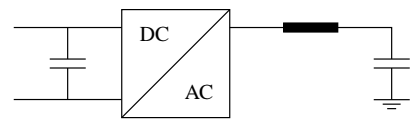


Fig. 1. Voltage source inverter connecting a DC link capacitance with an output LC filter.

Our starting point is to consider a voltage source inverter (VSI) which is assumed to operate in closed loop, but without PR controllers. The controlled inverter is modeled as a second order transfer function which maps the (sinusoidal) reference to the output,

$$y = G(s)y_{\text{ref}}, \quad G(s) = \frac{\omega^2}{s^2 + \xi\omega s + \omega^2}, \quad (1)$$

where  $\omega$  is the natural frequency and  $\xi$  is the damping of the controlled inverter. One example of a system which can be modeled as such, is a VSI with LC filter, as the one shown in Figure 1, controlled in abc frame by a cascaded voltage-current control system comprising proportional controllers.

We note that, with properly designed control, a VSI is expected to behave as second order systems in closed loop. Thus, assuming a system model of the form (1) is not restrictive.

The output voltage of voltage source inverters is generated by a frequent switching between different voltage levels on the DC side. The generated voltages can thus be described as piecewise constant voltages; the output voltage is finally obtained by low-pass filtering the piecewise constant voltage by means of LC circuits. The output voltage contains not only the requested reference voltage, but also harmonics.

#### A. Proportional-resonant controllers

To achieve offset free tracking of the sinusoidal reference  $y_{\text{ref}}$  and to reduce harmonics in the output, we consider adding proportional-resonant (PR) controllers [10] to the system (1). The PR controllers are added in an outer loop (see Fig. 2) and adjust the reference according to

$$\tilde{y}_{\text{ref}} = y_{\text{ref}} + \sum_{n \in \{1,3,5,\dots,N\}} H_n(s)(y_{\text{ref}} - y),$$

where

$$H_n(s) = \frac{\lambda_n s}{s^2 + (n\omega_0)^2},$$

where the fundamental frequency  $\omega_0$  is the frequency of the reference (typically 50 or 60 Hz), and where  $\lambda_n$  are the feedback gains of the PR controllers. These gains are tuning parameters whose value affect the transient response of the closed loop system.

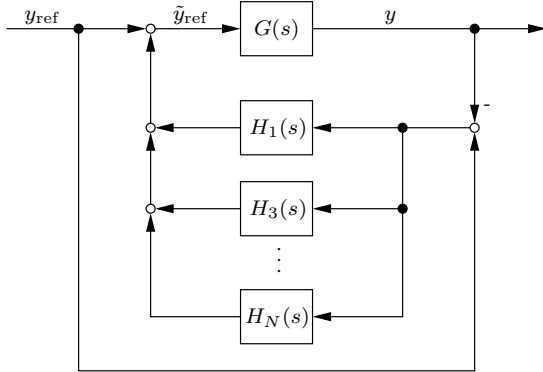


Fig. 2. Control structure of converter model with PR controllers.

#### B. Closed loop system

The order of the closed loop system dynamics is  $2 + 2N_{\text{PR}}$  where  $N_{\text{PR}}$  is the number of PR controllers added in the outer loop. The resulting closed-loop system can be stated as

$$y = \frac{G(s) + G(s) \sum_n H_n(s)}{I + G(s) \sum_n H_n(s)} y_{\text{ref}}, \quad (2)$$

and by changing the gains  $\lambda_i$ , we influence the location of the poles and zeros of the closed-loop system.

#### C. Closed loop poles

The PR gains  $\lambda_n$  affect both the poles and zeros of the closed loop system. In the design approach outlined below, we focus on the poles and seek to maximize the damping of the (complex) pole pair which has the lowest damping.

To clarify the approach we consider an example: Consider the case where two PR controllers (with harmonics number 1 and 3) are included in the control loop. For this case the system has 6 poles, and their position in the complex plane is determined by two gains  $\lambda_1, \lambda_3$ .

We enumerate combinations of gains  $\lambda_1, \lambda_3$  and plot the resulting poles; the result is shown in Fig. 3. In this figure we also plot the poles obtained when both gains are small (close to zero), and the poles obtained with one particular choice of high gains. The poles obtained with low and high gains are shown by blue and red circles, respectively.

From Fig. 3 it can be seen that one pole pair moves to the right, closer to the imaginary axis (and unstable domain), while the other two pole pairs move left. For sufficiently high gains, one pole pair becomes two purely real poles, one of which moves left and the other moves right, into the unstable domain.

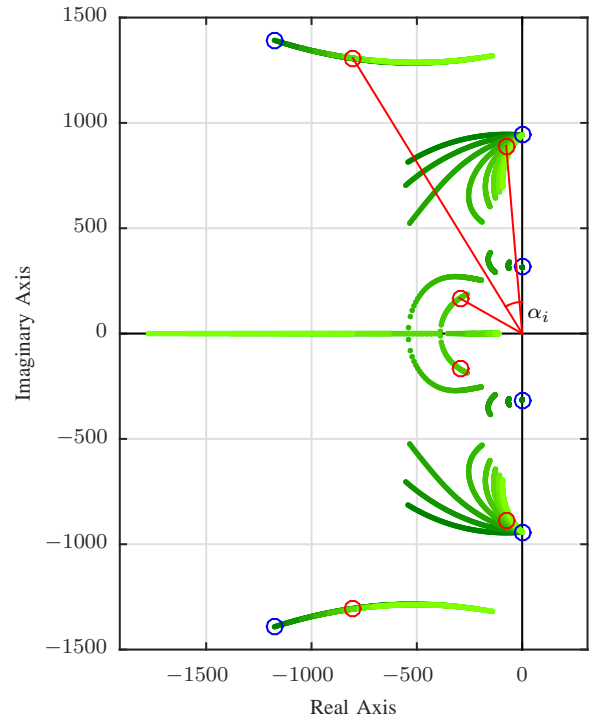


Fig. 3. Poles of the closed loop system with  $N = 2$  PR controllers: The green points show poles for various combinations of gains  $\lambda_1, \lambda_3$ . Blue circles show the poles for low gains. Red circles show poles for high gains.

Since changes in one gain affects all poles, it is not obvious how to choose the gains optimally. Increase in one gain may make one pole pair “more stable”, but may have negative

effects one another pole pair. Figure 4 shows  $\min_{i \in \{1,3\}} \alpha_i$ ; the smallest damping of the poles as a function of the gains.

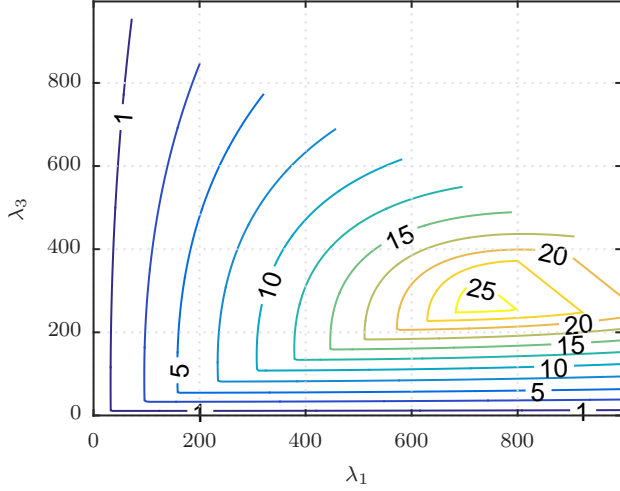


Fig. 4. Minimum of the damping  $\alpha_i$  of the pole pairs of the closed loop system with  $N_{PR} = 2$  PR controllers as a function of the PR controller gains  $\lambda_1$  and  $\lambda_3$ . The labels on the contour lines indicate damping in degrees.

### III. PROBLEM FORMULATION

To address the problem of how to choose the PR gains, we propose to formulate a max-min optimization problem, where we maximize the damping of the least damped pole pair. More precisely, we consider the angle between the pole and the imaginary axis (assuming the pole is in the open left hand plane);

$$\alpha_i = \tan^{-1}(-\text{real}(p_i)/\text{imag}(p_i))$$

where  $p_i$  is a pole in the fourth quadrant. The problem we ideally want to solve is

$$\max_{\lambda_1, \lambda_3, \dots, \lambda_N} \min_{i \in \{1, 3, \dots, N\}} \alpha_i(\lambda_1, \lambda_3, \dots, \lambda_N). \quad (3)$$

We note that the angles  $\alpha_i$  are dependent on the PR gains  $\lambda_i$ , and that as the gains vary, different angles take on the role of being “the least damped”.

#### A. Problem approximation

To obtain a tractable solution, we proceed to approximate  $\alpha_i(\lambda_1, \lambda_3, \dots, \lambda_N)$  with affine functions of the gains  $\lambda_i$ : That is, the angles are approximated by

$$\tilde{\alpha}_i(\lambda_1, \lambda_3, \dots, \lambda_N) = a_i^T \lambda + b_i \quad (4)$$

where

$$\lambda = [\lambda_1 \quad \lambda_3 \quad \dots \quad \lambda_N]^T$$

is a vector containing the gains and where  $a_i \in \mathbb{R}^N$ ,  $b_i \in \mathbb{R}$  are constant vectors obtained by sampling the value of the angles  $\alpha_i$  for a number of gain combinations, and performing a least squares fit.

By describing the angles in (3) with the approximation (4), we obtain a max-min problem with affine cost function:

$$\max_{\lambda_1, \lambda_3, \dots, \lambda_N} \min_{i \in \{1, 3, \dots, N\}} a_i^T \lambda + b_i. \quad (5)$$

This problem can be equivalently formulated a linear program (LP) according to

$$\min c^T x, \quad \text{s.t. } Ax \leq B \quad (6)$$

with matrices

$$A = \begin{bmatrix} 1 & -c_1^T \\ 1 & -c_2^T \\ \vdots & \vdots \\ 1 & -c_N^T \end{bmatrix}, \quad B = \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ b_N \end{bmatrix}, \quad C = \begin{bmatrix} -1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}.$$

Linear programs can be solved efficiently with readily available software.

### IV. NUMERICAL EXAMPLE

The approach for PR gain optimization described above was applied to a VSI with LC filter used in UPS applications. The UPS considered is a four-wire topology where the dynamics of the three phases are decoupled, due to the connection between filter and DC side neutral point. Due to the decoupling, we consider each of the three phases individually and design stabilizing controllers with proportional feedback. The closed loop system thus becomes a second order transfer function from voltage reference to output voltage on the form (1).

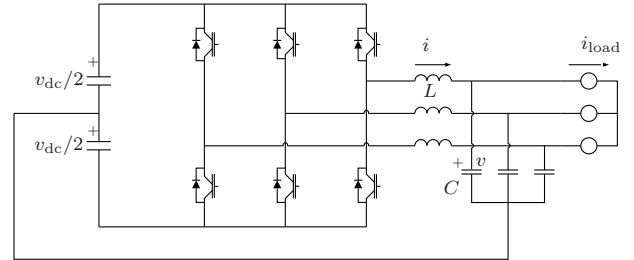


Fig. 5.

The inner control loop is augmented with  $N_{PR} = 4$  PR controllers as described in Fig. 2.

### REFERENCES

- [1] P. Mattavelli. Synchronous-frame harmonic control for high-performance ac power supplies. *IEEE Transactions on Industry Applications*, 37(3):864–872, May 2001.
- [2] E. Demirkutlu, S. Cetinkaya, and A. M. Hava. Output voltage control of a four-leg inverter based three-phase ups by means of stationary frame resonant filter banks. In *2007 IEEE International Electric Machines Drives Conference*, volume 1, pages 880–885, May 2007.
- [3] M. Monfared, S. Golestan, and J. M. Guerrero. Analysis, design, and experimental verification of a synchronous reference frame voltage control for single-phase inverters. *IEEE Transactions on Industrial Electronics*, 61(1):258–269, Jan 2014.

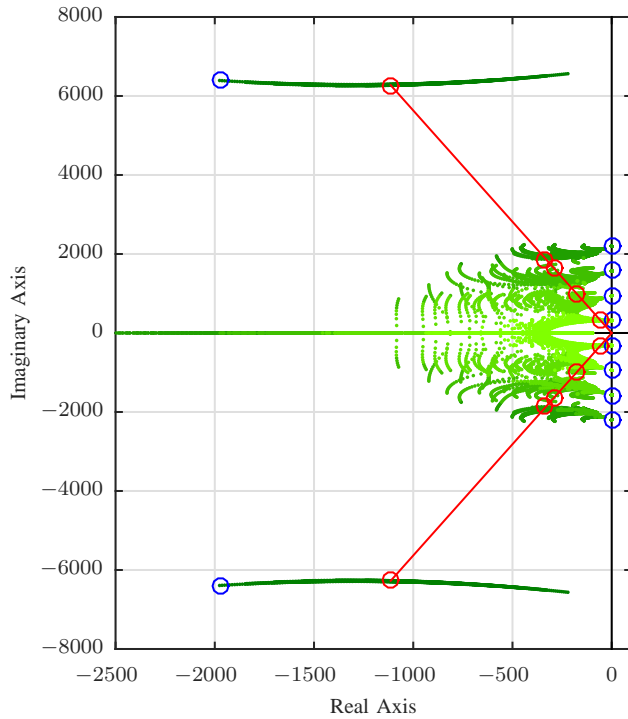


Fig. 6. Poles of the closed loop system with  $N = 4$  PR controllers: The green points show poles for various combinations of gains  $\lambda_1$ ,  $\lambda_3$ ,  $\lambda_5$  and  $\lambda_7$ . Blue circles show the poles for low gains. Red circles show poles for the optimal gains.

- [4] A. Vidal, F. D. Freijedo, A. G. Yepes, P. Fernandez-Comesana, J. Malvar, O. Lopez, and J. Doval-Gandoy. Assessment and Optimization of the Transient Response of Proportional-Resonant Current Controllers for Distributed Power Generation Systems. *IEEE Transactions on Industrial Electronics*, 60(4):1367–1383, April 2013.
- [5] X. Yuan, W. Merk, H. Stemmler, and J. Allmeling. Stationary-frame Generalized Integrators for Current Control of Active Power Filters With Zero Steady-State Error for Current Harmonics of Concern Under Unbalanced and Distorted Operating Conditions. *IEEE Transactions on Industry Applications*, 38(2):523–532, Mar 2002.
- [6] A. G. Yepes, F. D. Freijedo, J. Doval-Gandoy, O. Lopez, J. Malvar, and P. Fernandez-Comesana. Effects of Discretization Methods on the Performance of Resonant Controllers. *IEEE Transactions on Power Electronics*, 25(7):1692–1712, July 2010.
- [7] R. A. Gannett, J. C. Sozio, and D. Boroyevich. Application of synchronous and stationary frame controllers for unbalanced and nonlinear load compensation in 4-leg inverters. In *APEC. Seventeenth Annual IEEE Applied Power Electronics Conference and Exposition (Cat. No.02CH37335)*, volume 2, pages 1038–1043 vol.2, 2002.
- [8] D. G. Holmes, T. A. Lipo, B. P. McGrath, and W. Y. Kong. Optimized Design of Stationary Frame Three Phase AC Current Regulators. *IEEE Transactions on Power Electronics*, 24(11):2417–2426, Nov 2009.
- [9] F. O. Martinz, K. C. M. de Carvalho, N. R. N. Ama, W. Komatsu, and L. Matakas. Optimized Tuning Method of Stationary Frame Proportional Resonant Current Controllers. In *2014 International Power Electronics Conference (IPEC-Hiroshima 2014 - ECCE ASIA)*, pages 2988–2995, May 2014.
- [10] S. Fukuda and T. Yoda. A Novel Current-Tracking Method for Active Filters Based on a Sinusoidal Internal Model. *IEEE Transactions on Industry Applications*, 37(3):888–895, 2001.