Model Based Optimal Tuning of Proportional Resonant Controllers

Topic number: 5

Abstract—**The paper considers the optimal choice of gains of proportional-resonant controllers. A converter, controlled in closed loop, but with out proportional resonant controllers, is modeled as a second order transfer function from reference to output. The error between reference and output is fed back through a set of N proportional resonant controller and is added to the reference. The root locus of the closed loop system is considered as a function of the proportional-resonant gains. To find the optimal choice of gains, we consider maximizing the damping of the mode with smallest damping. This corresponds to solving a nonlinear min-max problem. After linearization and reformulation, the problem is stated as a linear program.**

I. Introduction

Proportional resonant tuning methods [1]–[7]

II. Converter Model

We consider a voltage source inverter which is assumed to operate in closed loop, but without PR controllers of integrators. The voltage source inverter is modeled by a second order transfer function which maps the (sinusoidal) reference to the output.;

$$y = G(s)y_{\text{ref}}, \quad G(s) = \frac{\omega^2}{s^2 + \xi\omega s + \omega^2} \qquad (1)$$

where ω is the natural frequency and ξ is the damping of the (closed loop) inverter.

We note that, with properly designed control, most inverter with resonant filters are expected to behave as second order systems in closed loop. Assuming a system model on the form (1) is thus not restrictive.

A. Proportional-resonant controllers

To achieve offset free tracking of the sinusoidal reference y_{ref} and to reduce harmonics in the output, we consider adding proportional-resonant (PR) controllers [8] to the system (1). The PR controllers are added in a slower outer loop (see Fig. 1) and adjust the reference according to

$$\tilde{y}_{\text{ref}} = y_{\text{ref}} + \sum_{n\in\{1,3,5,\dots\}} H_n(s)(y - y_{\text{ref}})$$

where

$$H_n(s) = \frac{\lambda_n s}{s^2 - n\omega_0^2}$$

where the fundamental frequency ω_0 is the frequency of the reference (typically corresponding to 50 or 60 Hz), and where λ_n are the feedback gains of the PR controllers. These gains are tuning parameters who's value affect the transient response of the closed loop system.
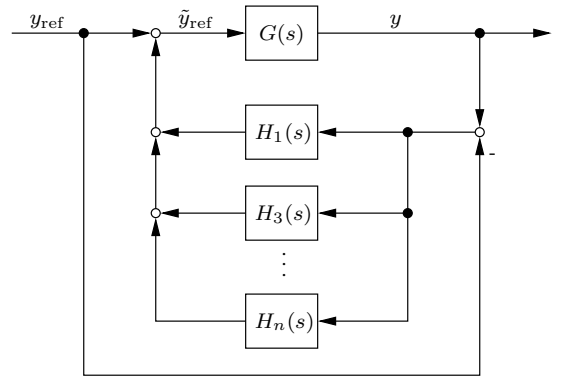

Fig. 1. Control structure of converter model with PR controllers.

B. Closed loop system

The order of the closed loop system dynamics is $2 + 2N$ where N is the number of PR controllers added in the outer loop.

III. Controller Gain Optimization

The PR gains λ_n affect both the poles and zeros of the closed loop system. In the approach presented below, we focus on the poles and seek to maximize the damping of the (complex) pole pair which has the lowest damping.

To clarify the approach we consider an example: Consider the case where two PR controllers (with harmonics number 1 and 3) are included in the control loop. For this case the system has 6 poles, and their position in the complex plane is determined by two gains λ_1, λ_3.

We enumerate combinations of gains λ_1, λ_3 and plot the resulting poles, the results is shown by the green dots in Fig. 2. In this figure we also plot the poles obtained when both gains are small (close to zero), and the poles obtained with one particular choice of high gains. The poles obtained with low and high gains are shown by blue and red circlesÂ´, respectively.

From Fig. 2 it can be seen that one pole pairs moves to the right, closer to the imaginary line (and unstable domain), while the other two pole pairs move left. For sufficiently high gains, one pole pair become two purely real poles, one of which move left and the other move right, into the unstable domain.
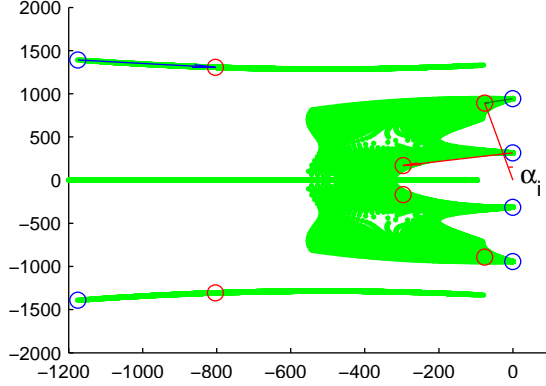

Fig. 2.   Poles of the closed loop system with $N = 2$ PR controllers: The green points show poles for various combinations of gains λ_1, λ_3. Blue circles chow the poles for low gains. Red circle show poles for high gains.

Since changes in one gain affects all poles, it is not obvious how to choose the gains optimally. Increase in one gain may make one pole pair "more stable", but may have negative effects one another pole pair.

To address the problem of how to chose the PR gains, we propose to formulate a max-min optimization problem where we maximize the damping of the least damped pole. More precisely, we consider the angle between of the pole and the imaginary axis (assuming the pole is in the open left hand plane);

$$\alpha_i = \tan^{-1}(-\mathrm{real}(p_i)/\mathrm{imag}(p_i))$$

where p_i is a pole in the fourth quadrant. The problem we ideally ant to solve is

$$\max_{\lambda_1, \lambda_3, \ldots \lambda_N} \min_{i \in \{1,3,\ldots,N\}} \alpha_i(\lambda_1, \lambda_3, \ldots \lambda_N). \qquad (2)$$

We note that the angles α_i are dependent on the PR gains λ_i, and that as hte gains vary, different angles take on the role of being "the smallest".

A. Problem approximation

To obtain a tractable solution, we proceed to approximate $\alpha_i(\lambda_1, \lambda_3, \ldots \lambda_N)$ with affine functions of the gains λ_i: That is, the angles are approximated by

$$\tilde{\alpha}_i(\lambda_1, \lambda_3, \ldots \lambda_N) = a_i^T \lambda + b_i \qquad (3)$$

where

$$\lambda = \begin{bmatrix} \lambda_1 & \lambda_3 & \ldots & \lambda_N \end{bmatrix}^T$$

is a vector containing the gains and where $a_i \in \mathbb{R}^N$, $b_i \in \mathbb{R}$ are constant vectors obtained by sampling the value of the angles

α_i for a number of gain combinations, and performing a least squares fit.

By describing the angles in (2) with the approximation (3), we obtain a max-min problem with affine cost function. This problem can be equivalently formulated a linear program (LP) according to

$$\min c^T x, \quad \mathrm{s.t.} Ax \le B \qquad (4)$$

with matrices

$$A = \begin{bmatrix} 1 & -c_1^T \\ 1 & -c_2^T \\ & \vdots \\ 1 & -c_N^T \end{bmatrix}, \quad B = \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ b_N \end{bmatrix}, \quad C = \begin{bmatrix} -1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}.$$

Put derivation in appendix

IV.   NUMERICAL EXAMPLE

REFERENCES

[1] V. Blasko and V. Kaura. A Novel Control to Actively Damp Resonance in Input LC Filter of a Three-Phase Voltage Source Converter. *IEEE Transactions on Industry Applications*, 33(2):542–550, Mar 1997.

[2] D. O. Boillat, T. Friedli, J. Muhlethaler, J. W. Kolar, and W. Hribernik. Analysis of the Design space of Single-Stage and Two-stage LC Output Filters of Switched-Mode AC Power Sources. In *2012 IEEE Power and Energy Conference at Illinois*, pages 1–8, Feb 2012.

[3] A. Vidal, F. D. Freijedo, A. G. Yepes, P. Fernandez-Comesana, J. Malvar, O. Lopez, and J. Doval-Gandoy. Assessment and Optimization of the Transient Response of Proportional-Resonant Current Controllers for Distributed Power Generation Systems. *IEEE Transactions on Industrial Electronics*, 60(4):1367–1383, April 2013.

[4] D. G. Holmes, T. A. Lipo, B. P. McGrath, and W. Y. Kong. Optimized Design of Stationary Frame Three Phase AC Current Regulators. *IEEE Transactions on Power Electronics*, 24(11):2417–2426, Nov 2009.

[5] F. O. Martinz, K. C. M. de Carvalho, N. R. N. Ama, W. Komatsu, and L. Matakas. Optimized Tuning Method of Stationary Frame Proportional Resonant Current Controllers. In *2014 International Power Electronics Conference (IPEC-Hiroshima 2014 - ECCE ASIA)*, pages 2988–2995, May 2014.

[6] Xiaoming Yuan, W. Merk, H. Stemmler, and J. Allmeling. Stationary-frame Generalized Integrators for Current Control of Active Power Filters With Zero Steady-State Error for Current Harmonics of Concern Under Unbalanced and Distorted Operating Conditions. *IEEE Transactions on Industry Applications*, 38(2):523–532, Mar 2002.

[7] A. G. Yepes, F. D. Freijedo, J. Doval-Gandoy, O. Lopez, J. Malvar, and P. Fernandez-Comesana. Effects of Discretization Methods on the Performance of Resonant Controllers. *IEEE Transactions on Power Electronics*, 25(7):1692–1712, July 2010.

[8] S. Fukuda and T. Yoda. A Novel Current-Tracking Method for Active Filters Based on a Sinusoidal Internal Model. *IEEE Transactions on Industry Applications*, 37(3):888–895, 2001.