






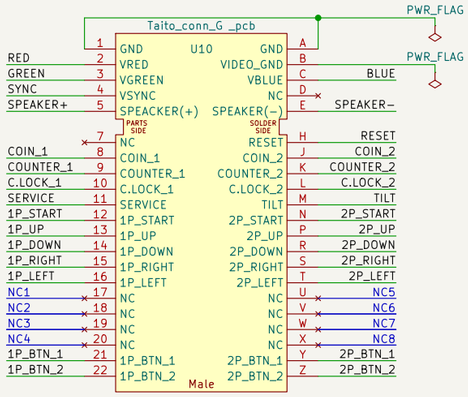


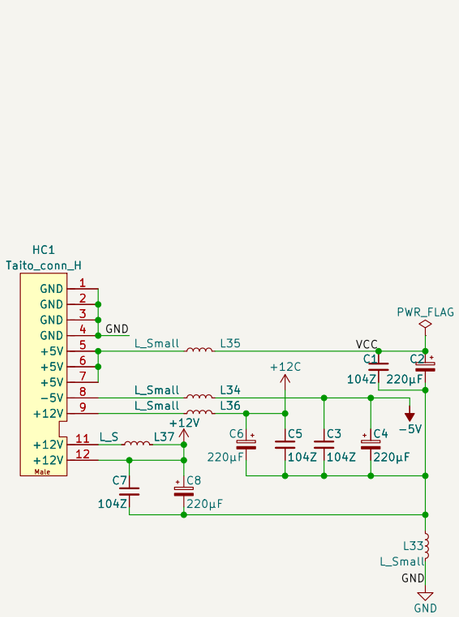


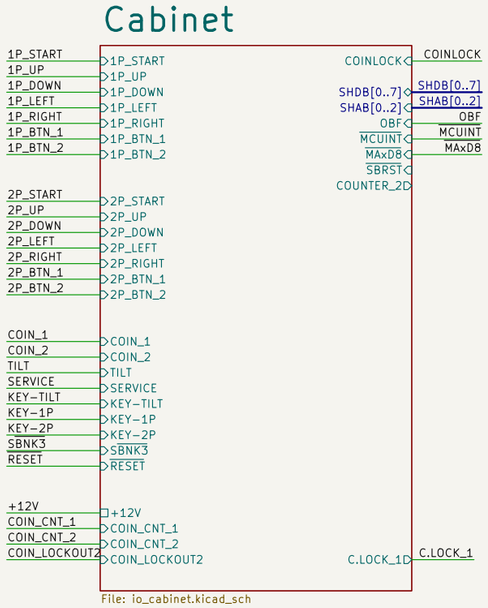


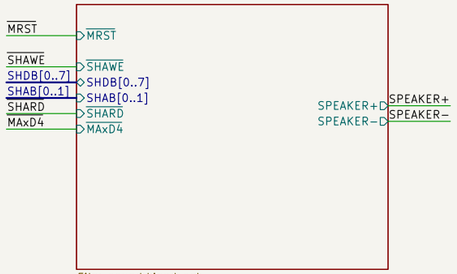


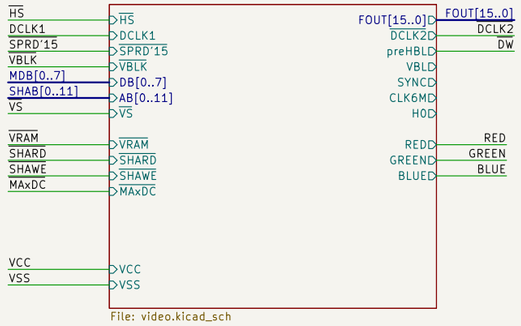

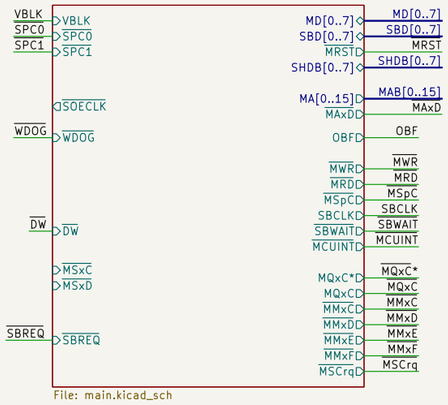

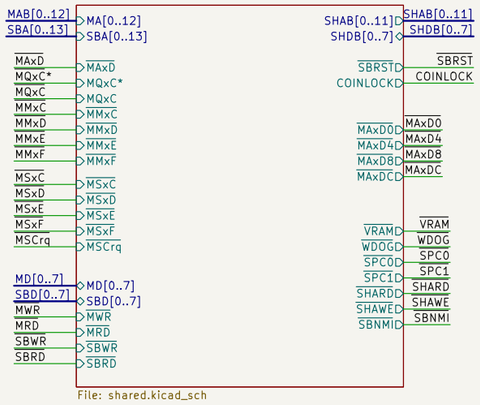

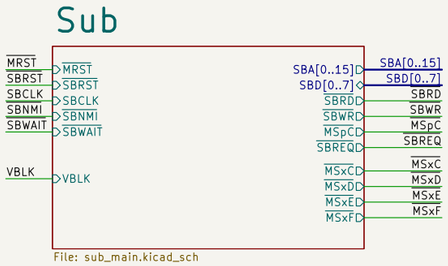





José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /
File: fairyland.kicad_sch

Title: The Fairyland Story

Size: A3	Date: 2024−11−16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/20

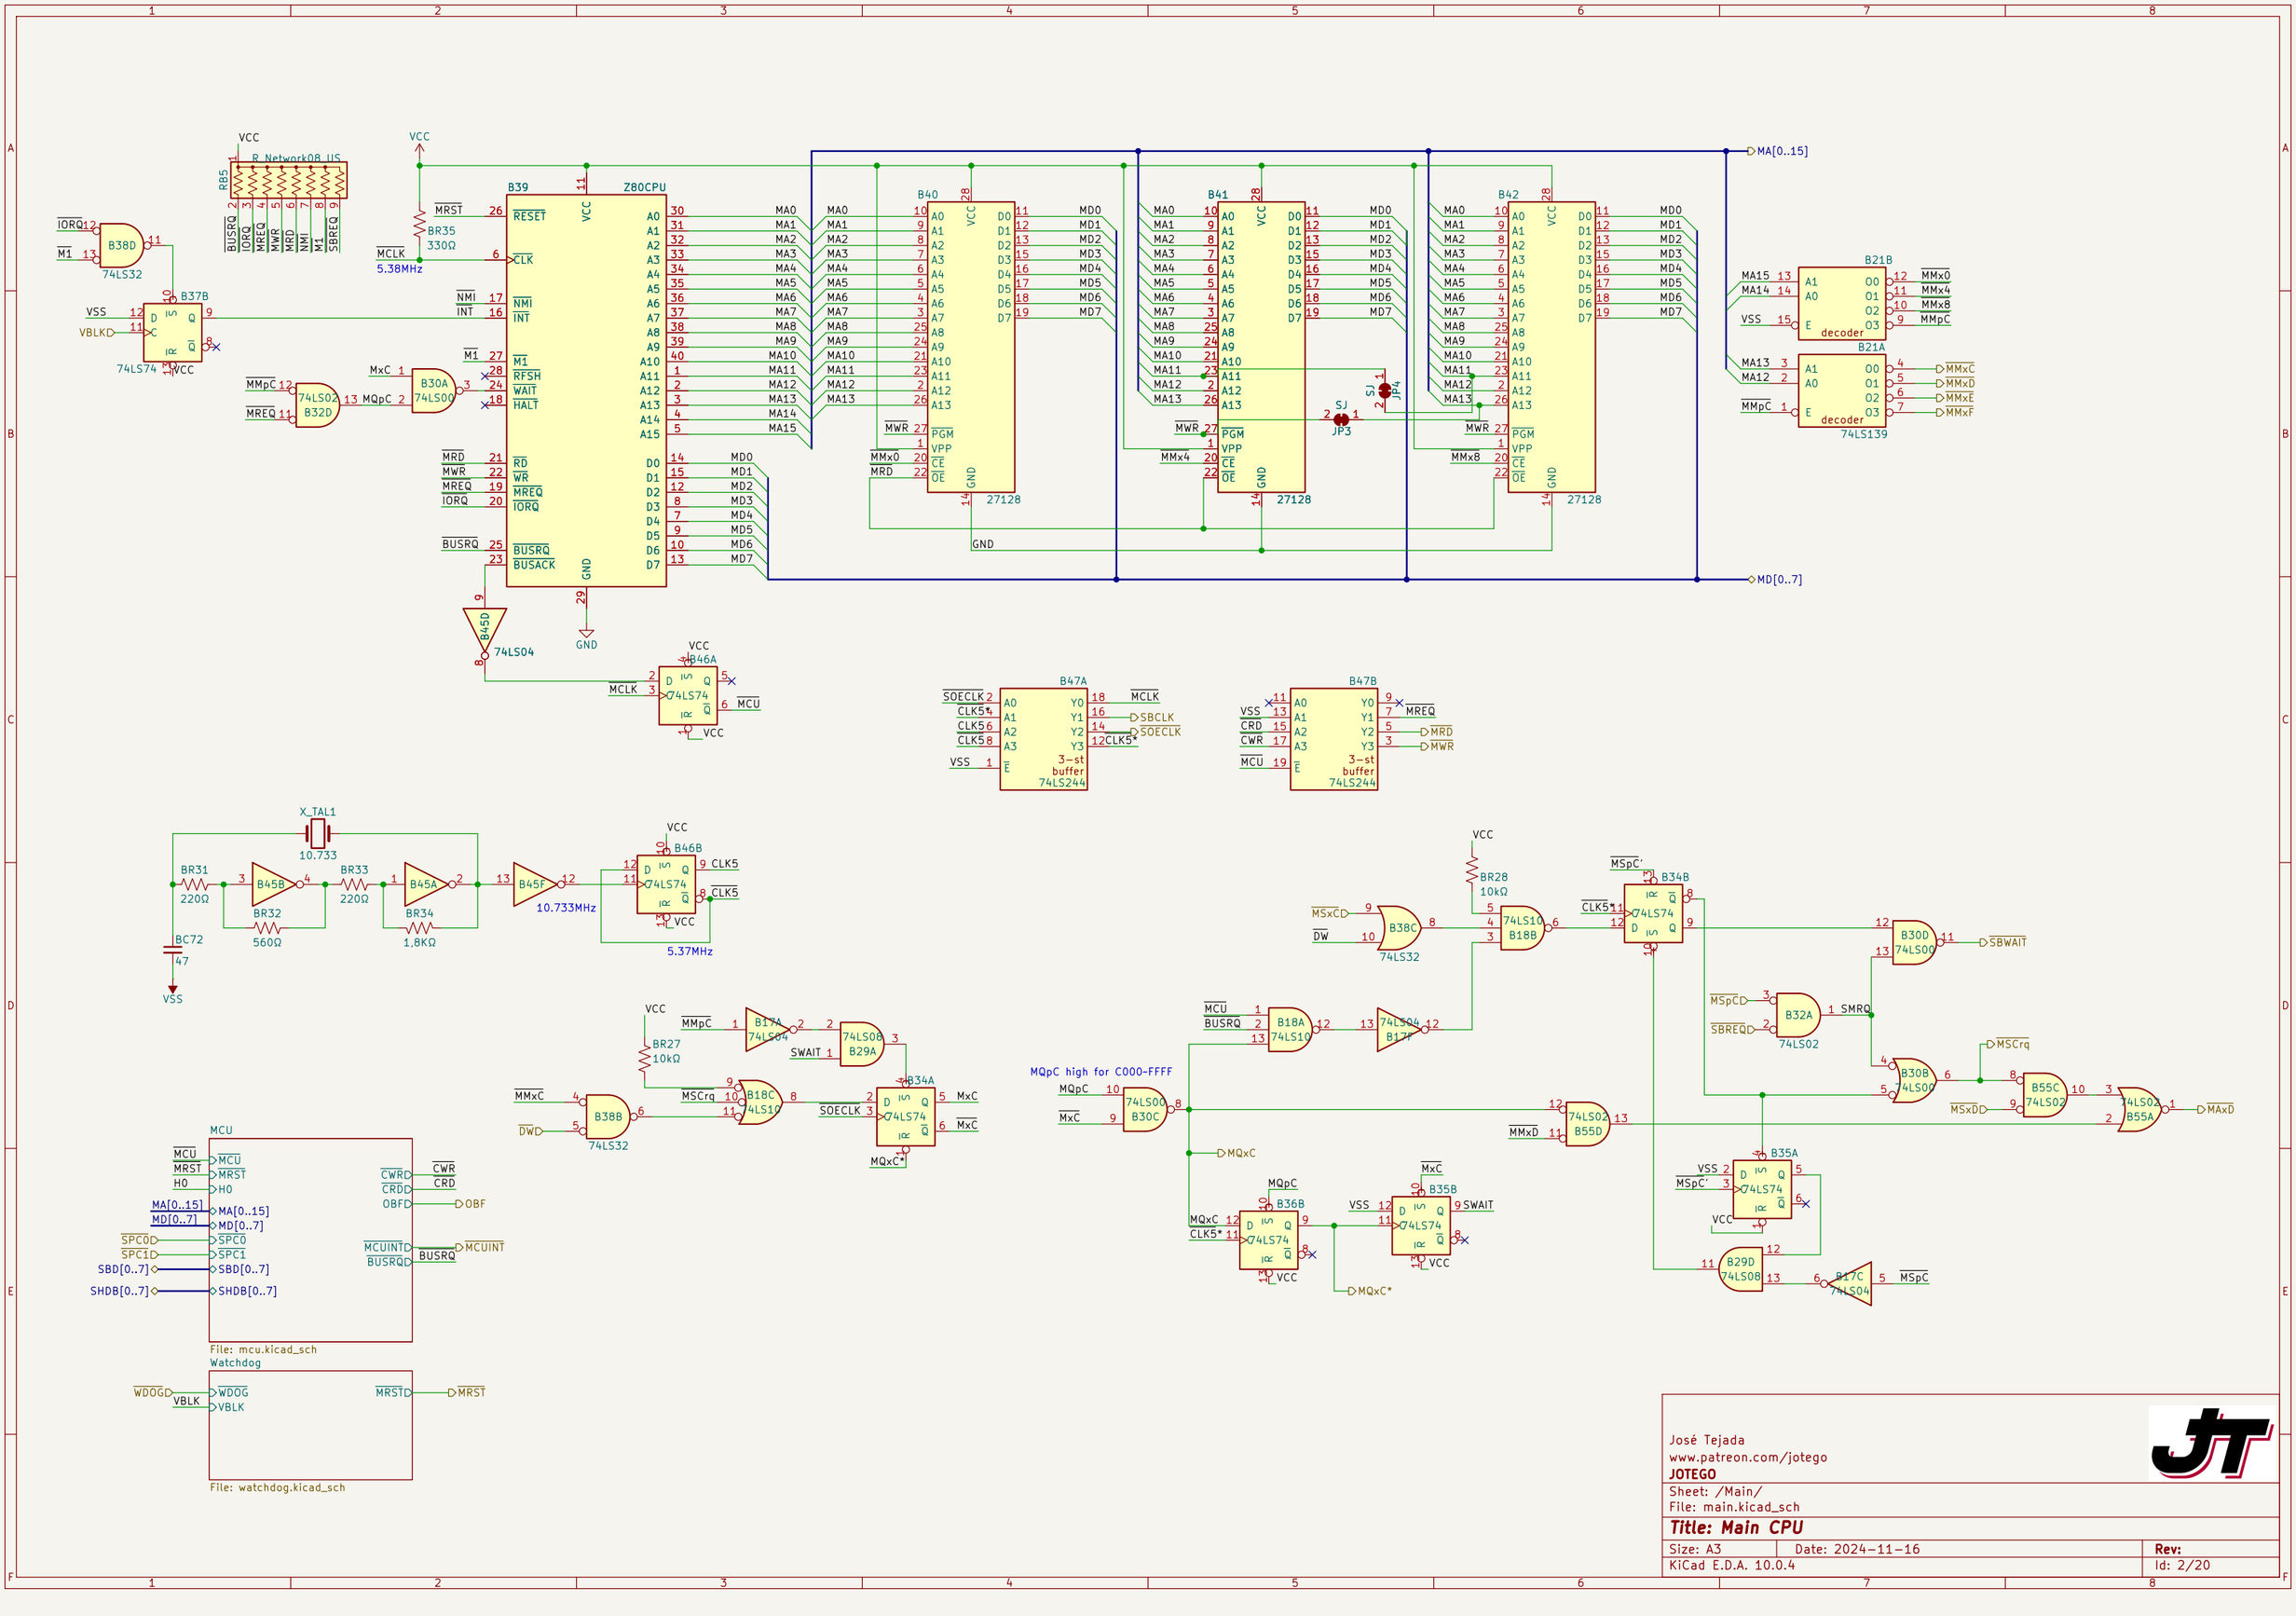
B39
Z80CPU
RESET
CLK
NMI
INT
M1
RFSH
WAIT
HALT
RD
WR
MREQ
IORQ
BUSRQ
BUSACK
A0
A1
A2
A3
A4
A5
A6
A7
A8
A9
A10
A11
A12
A13
A14
A15
D0
D1
D2
D3
D4
D5
D6
D7
GND
VCC
MRST
BR35
330Ω
MCLK
5.38MHz
B40
B41
B42
27128
PGM
VPP
CE
OE
MWR
MMx0
MMx4
MMx8
MRD
SJ
JP3
JP4
MA[0..15]
MD[0..7]
B21B
B21A
decoder
74LS139
MA15
MA14
MA13
MA12
MMpC
MMxC
MMxD
MMxE
MMxF
MMx0
MMx4
MMx8
VSS
IORQ
M1
B38D
74LS32
B37B
74LS74
VBLK
MMpC
MREQ
74LS02
B32D
MxC
B30A
74LS00
RB5
R_Network08_US
BUSRQ
MRQ
MWR
NMI
SBREQ
B45D
74LS04
B46A
MCU
B47A
B47B
74LS244
SOECLK
CLK5
CLK5*
SBCLK
CRD
CWR
B46B
CLK5
10.733MHz
5.37MHz
X_TAL1
10.733
BR31
220Ω
BR32
560Ω
BR33
220Ω
BR34
1.8KΩ
BC72
47
B45B
B45A
B45F
B17A
B17B
B18A
B18B
B18C
B38B
B38C
B29A
B34A
B34B
B36B
B35A
B35B
B30B
B30C
B30D
B32A
B55C
B55D
B29D
B17C
B55A
74LS08
74LS10
SWAIT
SBWAIT
SMRQ
MAxD
MSCrq
MSxD
MSxC
DW
MCU
BUSRQ
MQxC
MQxC*
MQpC
MQpC high for C000-FFFF
MSpC'
BR27
10kΩ
BR28
10kΩ
MCU
MRST
H0
MA[0..15]
MD[0..7]
SPC0
SPC1
SBD[0..7]
SHDB[0..7]
MCUINT
BUSRQ
OBF
File: mcu.kicad_sch
Watchdog
WDOG
VBLK
File: watchdog.kicad_sch
José Tejada
www.patreon.com/jotego
JOTEGO
Sheet: /Main/
File: main.kicad_sch
Title: Main CPU
Size: A3
Date: 2024-11-16
KiCad E.D.A. 10.0.4
Rev:
Id: 2/20

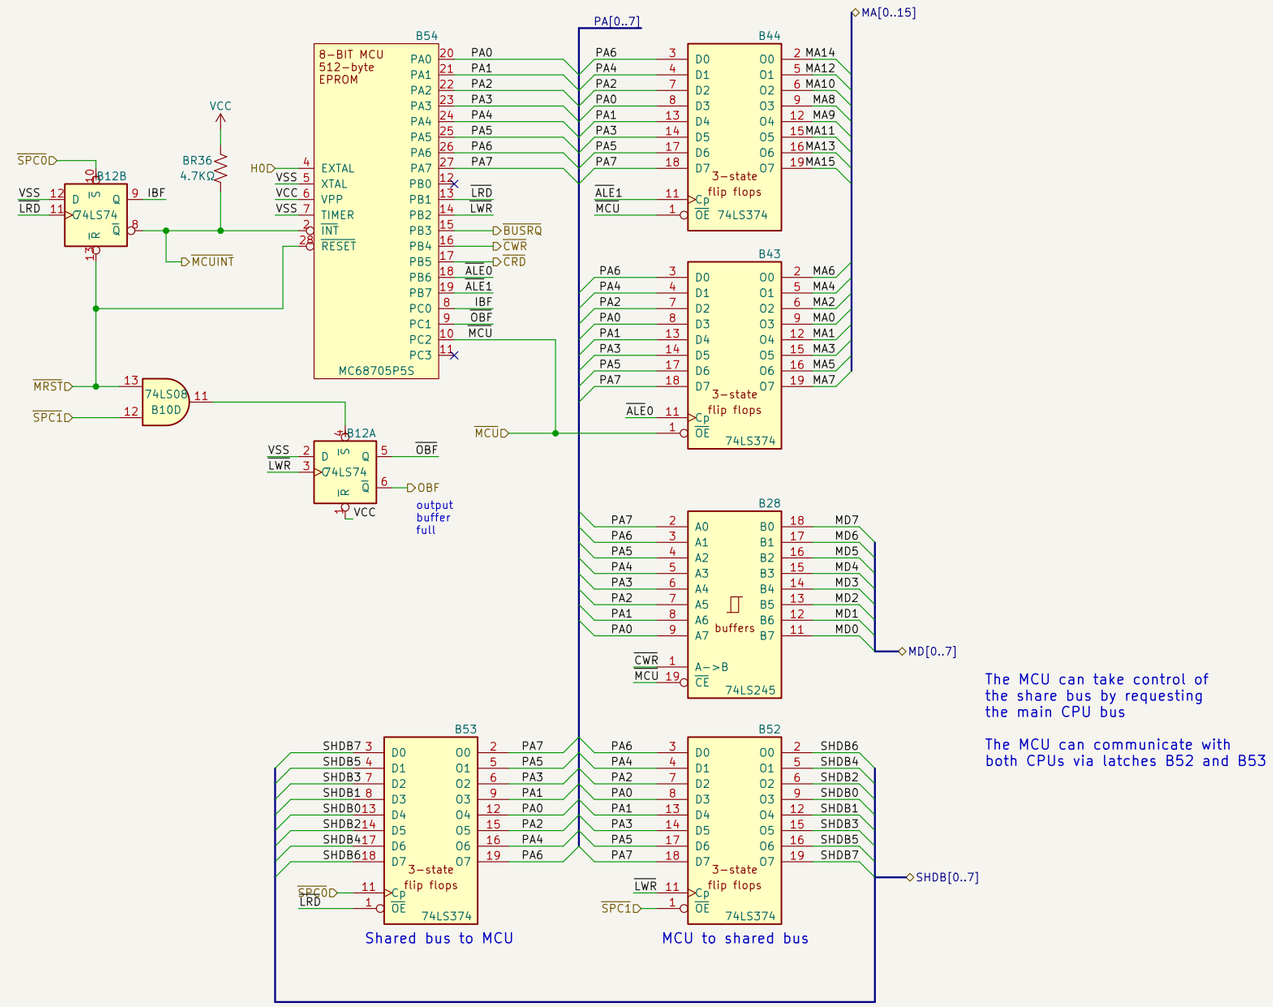


José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Main/MCU/
File: mcu.kicad_sch

Title: MCU

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 15/20

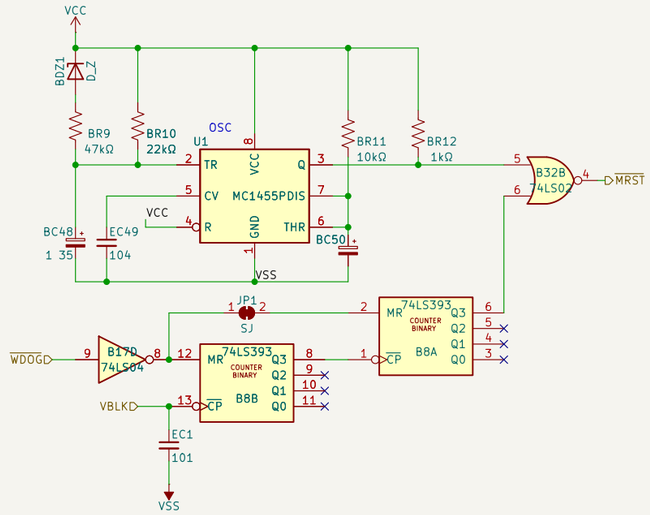


José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Main/Watchdog/
File: watchdog.kicad_sch


Title:

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 16/20


Object RAM




Timing

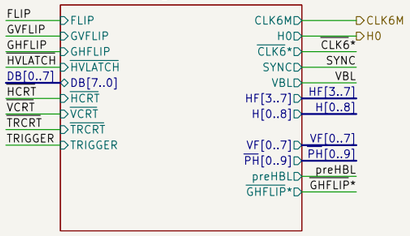


Video RAM

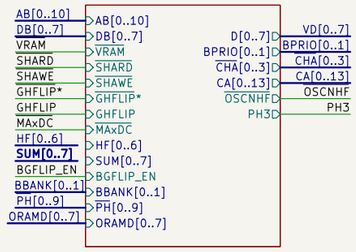


Tile ROM




Line buffer




Palette



J1

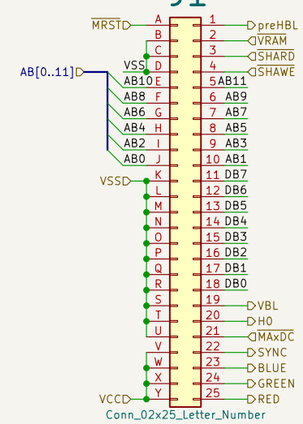

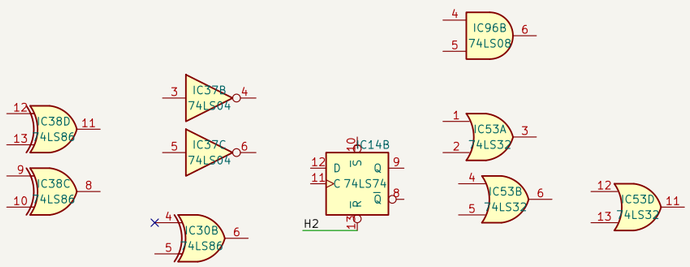


José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Video/
File: video.kicad_sch

Title: The Fairyland Story

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 3/20

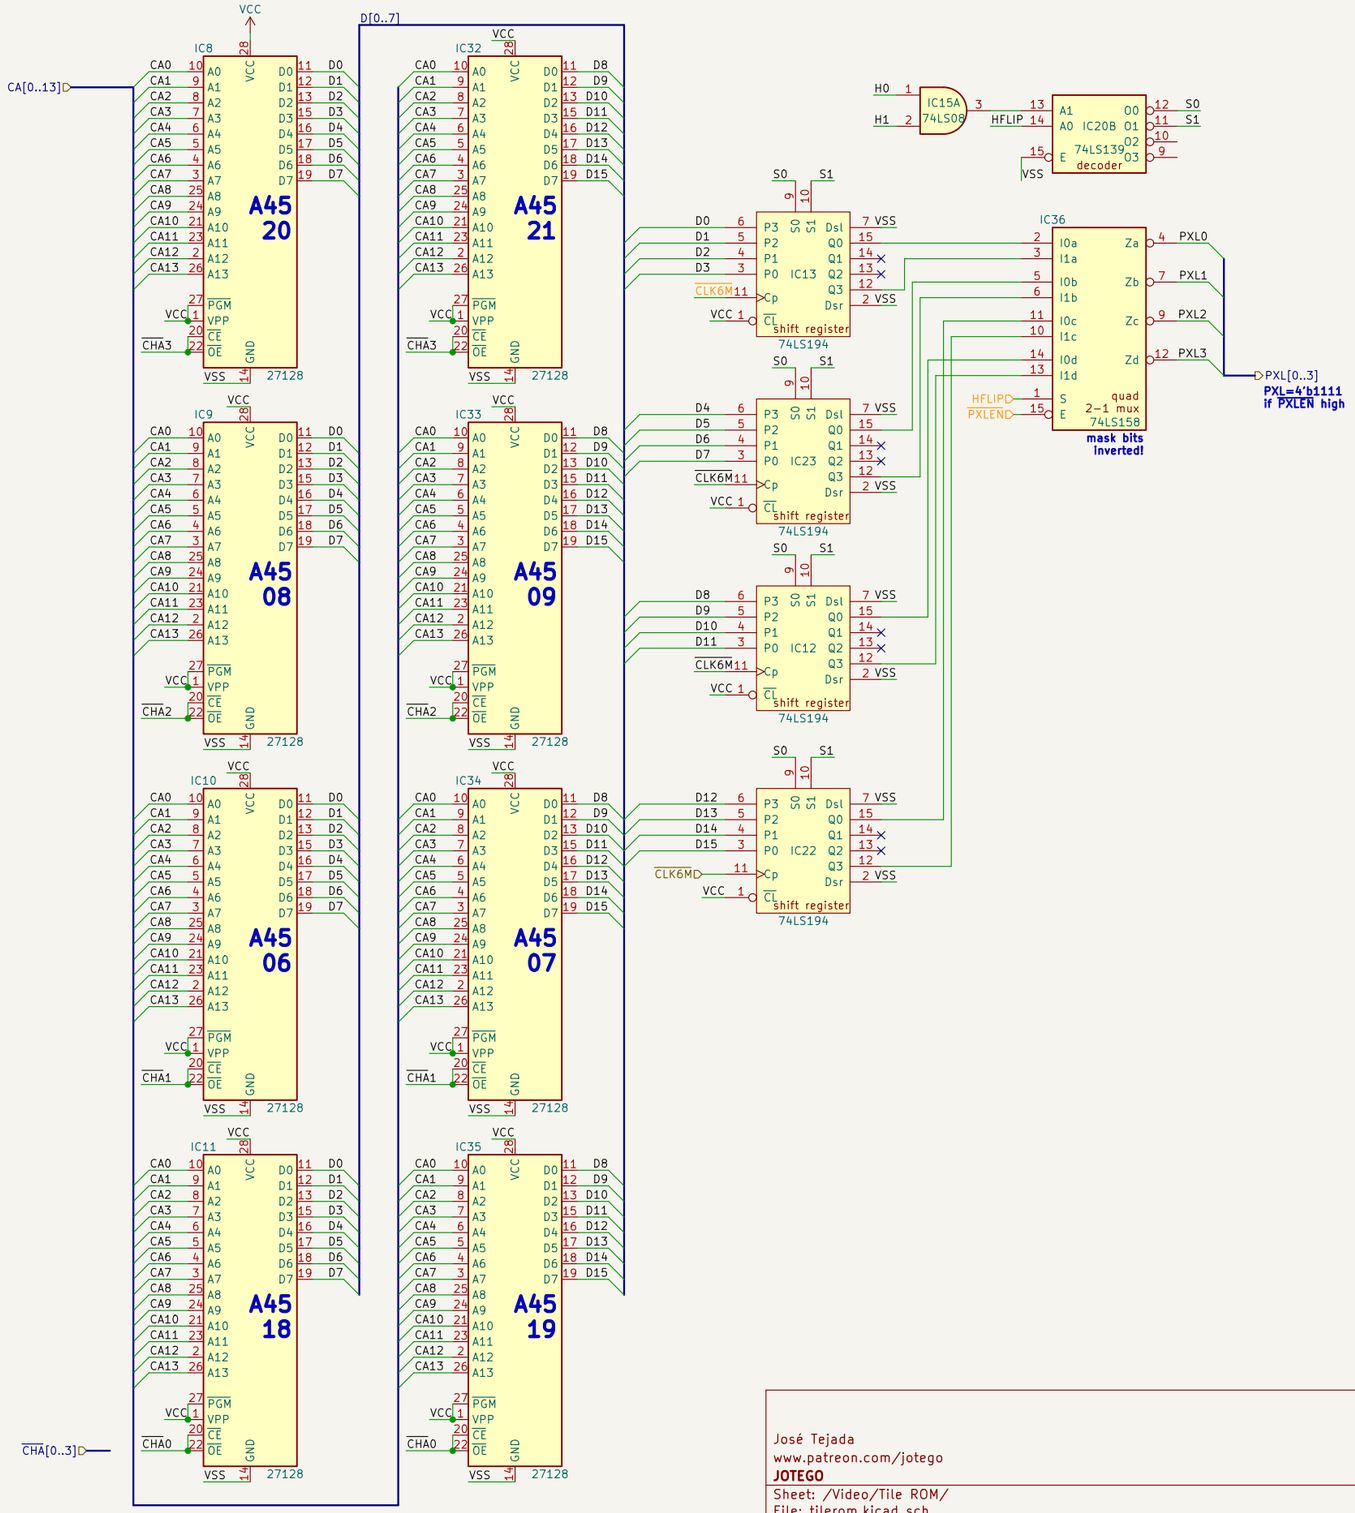



José Tejada
www.patreon.com/jotego
JOTEGO


Sheet: /Video/Tile ROM/
File: tilerom.kicad_sch


Title: Tile ROMs


Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 9/20

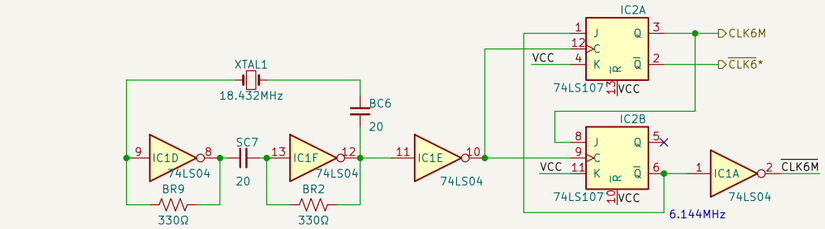


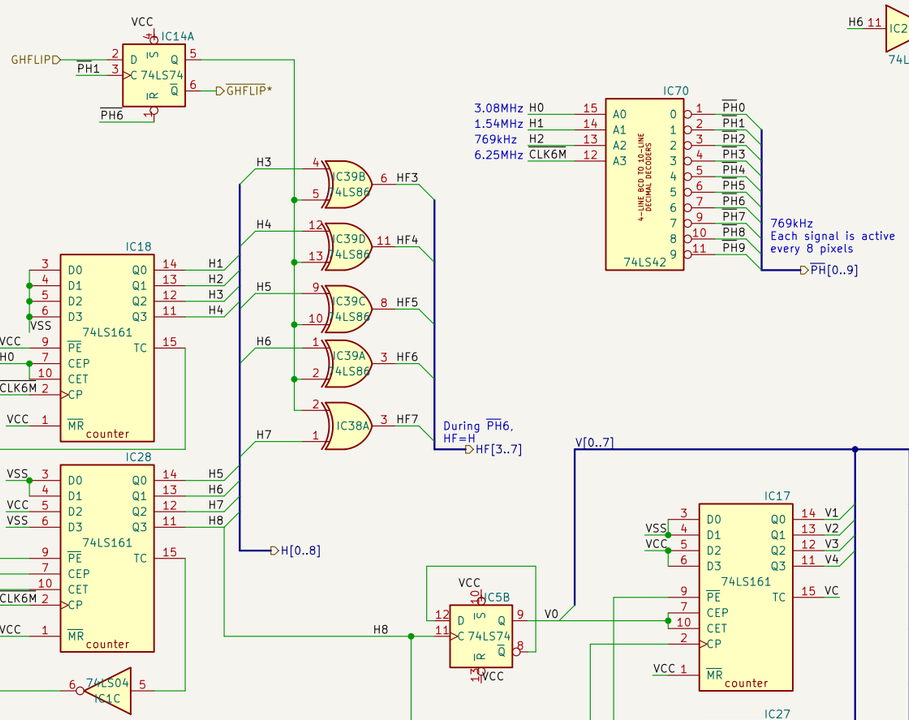

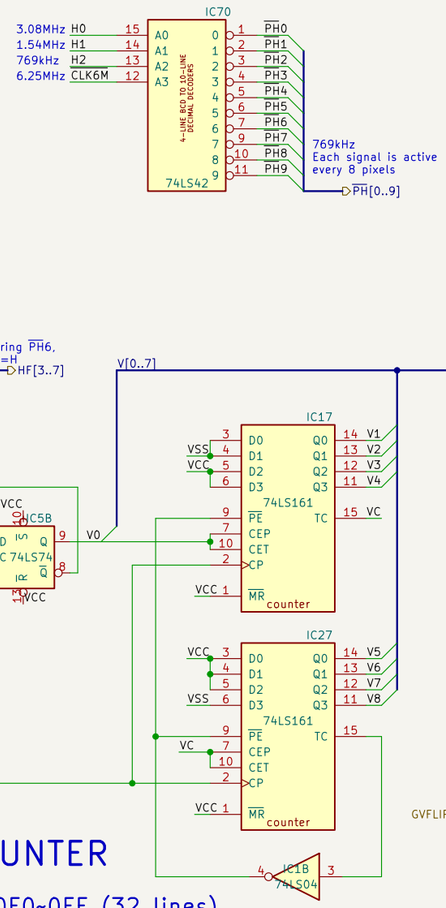


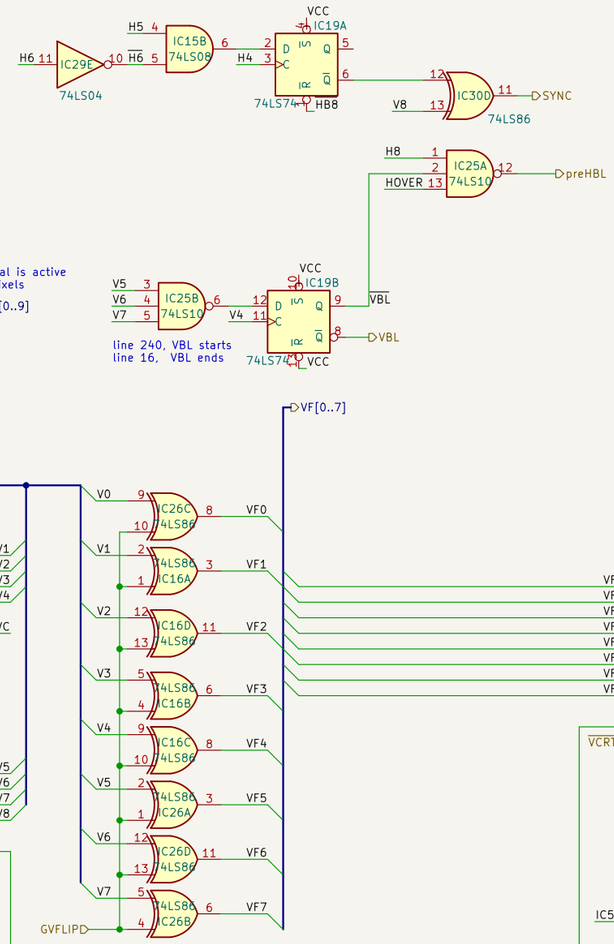



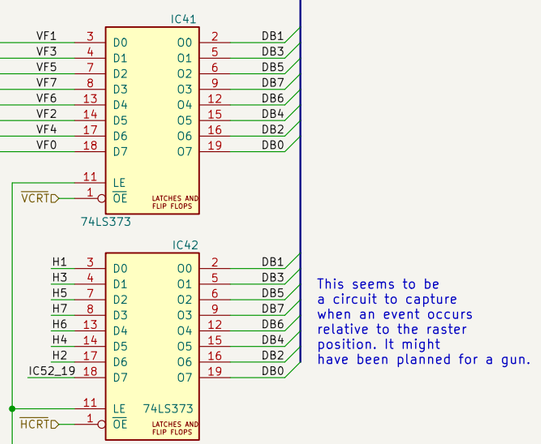

This seems to be
a circuit to capture
when an event occurs
relative to the raster
position. It might
have been planned for a gun.

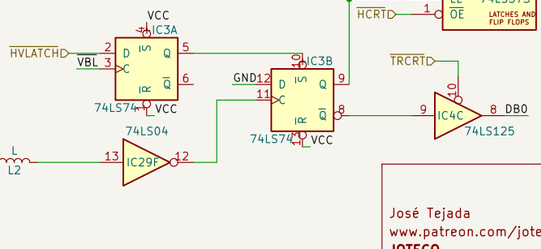

HORIZONTAL COUNTER

from 080 ~ 1FF
blanking 080~0FF (128 pixels)
active 100~1FF (256 pixels)

VERTICAL COUNTER


from 0F0 ~ 1FF
blanking 1F0~1FF~0F0~0FF (32 lines)
active 100~1EF (240 lines)

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Video/Timing/
File: timing.kicad_sch

Title: Video Timing

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 10/20

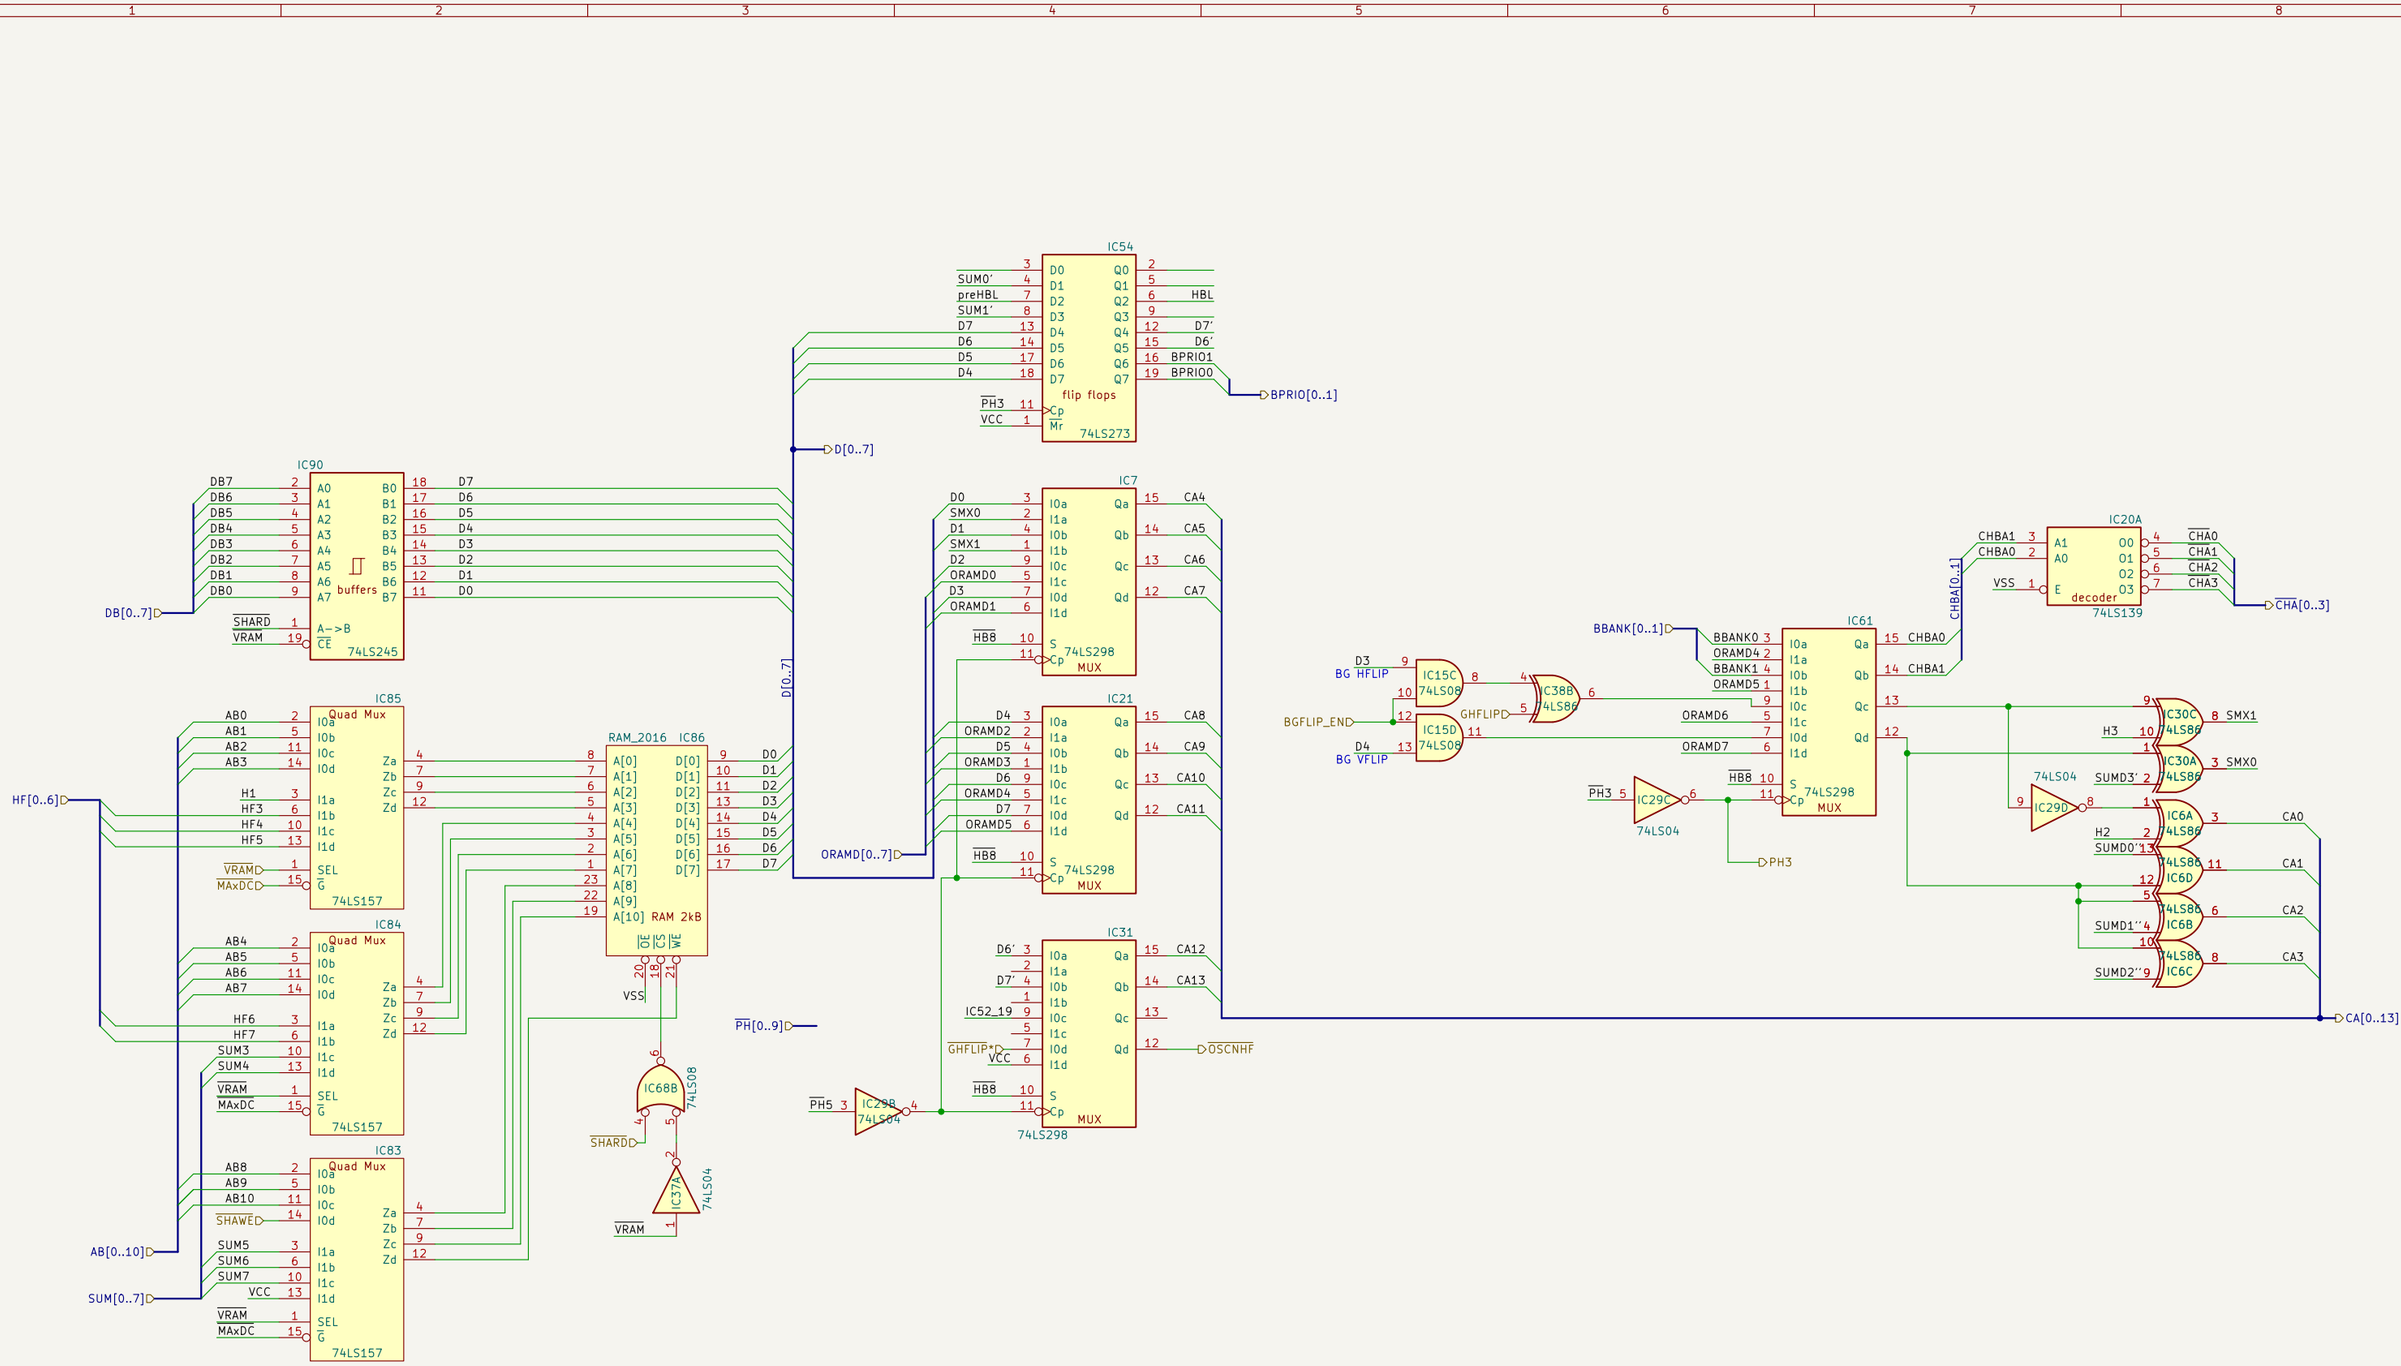

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Video/Video RAM/
File: vram.kicad_sch

Title: Background Video RAM

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 11/20

IC48
BPXL[0..7]
BPXL6 3
BPXL5 4
BPXL4 7
BPXL3 8
BPXL0 13
BPXL1 14
BPXL2 17
BPXL7 18
D0 D1 D2 D3 D4 D5 D6 D7
O0 O1 O2 O3 O4 O5 O6 O7
2 PAL6
5 PAL5
6 PAL4
9 PAL3
12 PAL0
15 PAL1
16 PAL2
19 PAL7
CLK6M 11
OBJWIN 1
Cp
OE
3-state flip flops 74LS374
PAL[0..7]
IC63
PAL3 3
PAL4 4
PAL5 7
PAL6 8
PAL7 13
PAL2 14
PAL1 17
PAL0 18
2 5 6 9 12 15 16 19
A3 A4 A5 A6 A7 A2 A1 A0
CLK6M 11
MAxDD/E 13
IC37F 12
74LS04
1
MAxDD/E
3-state flip flops 74LS374
OBJWIN
IC37E 11
10
74LS04
OPXL[0..11]
IC64
OPXL3 3
OPXL4 4
OPXL5 7
OPXL6 8
OPXL7 13
OPXL2 14
OPXL1 17
OPXL0 18
D0 D1 D2 D3 D4 D5 D6 D7
O0 O1 O2 O3 O4 O5 O6 O7
2 PAL3
5 PAL4
6 PAL5
9 PAL6
12 PAL7
15 PAL2
16 PAL1
19 PAL0
CLK6M 11
1
Cp
OE
3-state flip flops 74LS374
AB[0..10]
IC75
AB3 2
AB2 4
AB1 6
AB0 8
AB7 11
AB6 13
AB5 15
AB4 17
I0a I1a I2a I3a I0b I1b I2b I3b
O0a O1a O2a O3a O0b O1b O2b O3b
18 16 14 12 9 7 5 3
A3 A2 A1 A0 A7 A6 A5 A4
MAxDD/E1
19
OEa
OEb
74LS244
IC76
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9
D0 D1 D2 D3
MBM2148
CS
WE
PBANK1 15
VSS 8
WE0 10
14 13 12 11
D0 D1 D2 D3
STATIC RAM 1024x4 Bits
MAxDD* 4
SHAWE 5
IC97B
74LS32
6
IC80
AB3 2
AB2 4
AB1 6
AB0 8
AB7 11
AB6 13
AB5 15
AB4 17
I0a I1a I2a I3a I0b I1b I2b I3b
O0a O1a O2a O3a O0b O1b O2b O3b
18PRA3 16PRA2 14PRA1 12PRA0 9 PRA7 7 PRA6 5 PRA5 3 PRA4
1
MAxDE
19
OEa
OEb
74LS244
IC77
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9
D0 D1 D2 D3
MBM2148
CS
WE
PBANK1 15
VSS 8
WE0 10
14 13 12 11
D4 D5 D6 D7
STATIC RAM 1024x4 Bits
A[0..9]
IC81
PRA4* 3
PRA5* 4
OPXL8 7
OPXL9 8
BPXL0 13
BPXL1 14
BPXL2 17
BPXL3 18
D0 D1 D2 D3 D4 D5 D6 D7
O0 O1 O2 O3 O4 O5 O6 O7
2 PRA4
5 PRA5
6 PRA6
9 PRA7
12 PRA0
15 PRA1
16 PRA2
19 PRA3
CLK6M 11
MAxDD/E 1
Cp
OE
3-state flip flops 74LS374
IC82B
MAxDE 11
MAxDD 13
PBANK0 15
17
A0 A1 A2 A3
Y0 Y1 Y2 Y3
E
9 MAxDE*
7 MAxDD*
5 PRA8
3 A8
3-st buffer 74LS244
MAxDE 9
MAxDD 10
IC96C
74LS08
8
MAxDD/E 19
IC78
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9
D0 D1 D2 D3
MBM2148
CS
WE
PBANK1 15
VSS 8
WE1 10
14 13 12 11
D8 D9 D10 D11
STATIC RAM 1024x4 Bits
PRA[0..8]
IC79
PRA0 5
PRA1 6
PRA2 7
PRA3 4
PRA4 3
PRA5 2
PRA6 1
PRA7 17
PRA8 16
PBANK1 15
VSS 8
WE1 10
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9
D0 D1 D2 D3
14 13 12 11
D12 D13 D14 D15
STATIC RAM 1024x4 Bits
MAxDE* 1
SHAWE 2
IC97A
74LS32
3
priority RAM
Object priority over background is set by bit D12 of the priority RAM.
This RAM is addressed based on object pixel color and attributes.
If D12 is high and the pixel is valid object data, then the object wins over the background.
IC93
D8 3
D9 4
D10 6
D11 11
D6 13
D7 14
D0 D1 D2 D3 D4 D5
Q0 Q1 Q2 Q3 Q4 Q5
2 5 7 10 12 15
BR20 10kΩ
BR21 4.6kΩ
BR22 2.2kΩ
BR23 1kΩ
BR17 2.2kΩ
BR16 1kΩ
CLK6MD 9
1
Cp
Mr
74LS174
hex flip flop
IC92
D5 3
D4 4
D3 6
D0 11
D1 13
D2 14
D0 D1 D2 D3 D4 D5
Q0 Q1 Q2 Q3 Q4 Q5
2 5 7 10 12 15
BR18 4.6kΩ
BR19 10kΩ
BR12 1kΩ
BR15 10kΩ
BR14 4.6kΩ
BR13 2.2kΩ
CLK6M 9
1
Cp
Mr
74LS174
hex flip flop
IC25C
74LS10
8
IC95_9 9
IC95_8 10
VCC 11
VCC
TR3 Q_NPN_ECB
TR2 Q_NPN_ECB
TR1 Q_NPN_ECB
BLUE
GREEN
RED
BR11 270
BR10 270
BR9 270
VSS
VALID
IC95
OPXL11 3
OPXL10 4
7
IC95_8 8
IC95_15 13
IC52_9 14
D0 D1 D2 D3 D4 D5 D6 D7
O0 O1 O2 O3 O4 O5 O6 O7
5 PRA8
6
9 IC95_9
12 IC95_8
15 IC95_15
16 A8
19 TRIGGER
11
1
Cp
OE
3-state flip flops 74LS374
VCC
4.6k R7
4.6k R6
74LS08
IC96D
13
12
11
OBJWIN
D12
IC4B
5
6
74LS125
VSS
VCC
4.7k VR3
VR2 L
GUN
TO T CONNECTOR
VC1
C
VSS
IC52
OSCNHF 3
HB8 4
HBL 7
BPRIO1 8
BPRIO0 13
14
17
18
PH7 11
1
D0 D1 D2 D3 D4 D5 D6 D7
Q0 Q1 Q2 Q3 Q4 Q5 Q6 Q7
2 OSCNHF*
5
6 HB8*
9 IC52_9
12 PRA5*
15 PRA4*
16
19 IC52_19
flip flops
Cp
Mr
74LS273
BPRIO[0..1]
DB[0..7]
VCC 1
R_Network08_US
DB7 2
DB6 3
DB5 4
DB4 5
DB3 6
DB2 7
DB1 8
DB0 9
3 DB7
4 DB6
5 DB5
6 DB4
7 DB3
8 DB2
9 DB1
10 DB0
IC91
IC94
DB7 2
DB6 3
DB5 4
DB4 5
DB3 6
DB2 7
DB1 8
DB0 9
A0 A1 A2 A3 A4 A5 A6 A7
B0 B1 B2 B3 B4 B5 B6 B7
18 D7
17 D6
16 D5
15 D4
14 D3
13 D2
12 D1
11 D0
18 D15
17 D14
16 D13
15 D12
14 D11
13 D10
12 D9
11 D8
buffers
A->B
CE
RD 1
MAxDD 19
MAxDE 19
74LS245
IC46
DB1 3
DB3 4
DB5 7
DB7 8
DB6 13
DB4 14
DB2 17
DB0 18
D0 D1 D2 D3 D4 D5 D6 D7
Q0 Q1 Q2 Q3 Q4 Q5 Q6 Q7
2 GVFLIP
5 BBANK0
6 PBANK0
9 HVLATCH
12 PBANK1
15 BBANK1
16 BGFLIP_EN
19 GHFLIP
VCFG 11
VCC 1
Cp
Mr
flip flops 74LS273
BBANK[0..1]
IC89A
AB9 3
AB8 2
MAxDC 1
A1 A0 E
O0 O1 O2 O3
4 MAxDC*
5 MAxDD
6 MAxDE
7 MAxDF
decoder
74LS139
IC89B
AB1 13
AB0 14
15
A1 A0 E
O0 O1 O2 O3
12 HCRT
11 VCRT
10 TRCRT
9
decoder
74LS139
74LS32
IC97C
SHAWE 9
8 VCFG
IC89C
74LS139
decoder
José Tejada
www.patreon.com/jotego
JOTEGO
Sheet: /Video/Palette/
File: palette.kicad_sch
Title: Color Mixer and DAC
Size: A3
Date: 2024-11-16
Rev:
KiCad E.D.A. 10.0.4
Id: 12/20

selects tilemap palette during active video, sprite palette otherwise

IDX[0..4] holds the sprite index to be drawn next

PXLEN
low during active video to dump the background and during H blanking only if sprite data is needed

After the first eight object matches, new ones overwrite old ones every other frame

Count down from 7, during active H each time a matching for next line object is found

MAxDC* LOW -> CPU access
HIGH -> GFX access


Complex multiplexer driving the 256-byte memory because it holds three kinds of information
00~7F: 4-byte sprite data (32 sprites)
80~9F: sprite drawing order (bits 4:0) and sprite priority (bit 7)
A0~BF: column scroll
D0~DF: matched sprites for next line

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Video/Object RAM/
File: obj_ram.kicad_sch

Title: Object Information

Size: A3	Date: 2024-11-16	Rev:
KiCad E.D.A. 10.0.4		Id: 13/20

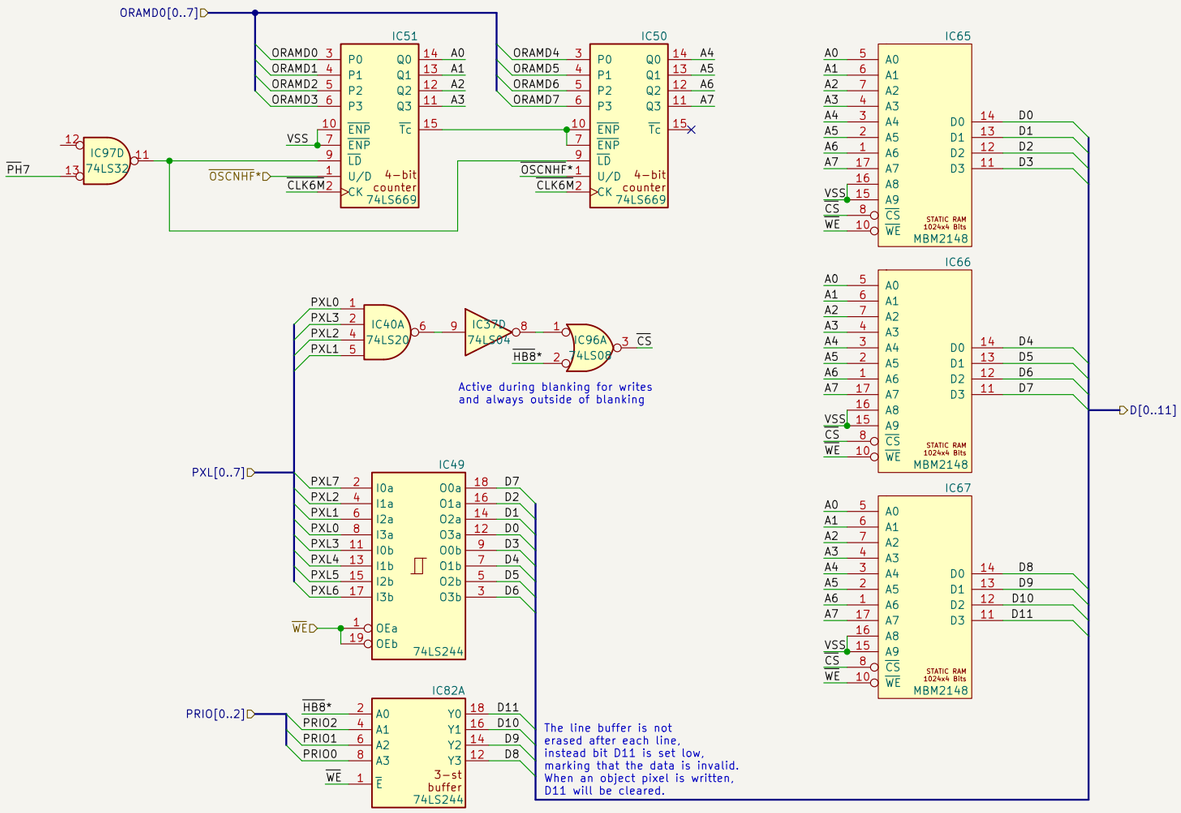


José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Video/Line buffer/
File: linebuf.kicad_sch

Title: Single Line Video Buffer

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 14/20

Clocks



File: snd_clocks.kicad_sch


Sound Generators

File: ongen.kicad_sch


Latches

File: latches.kicad_sch

Analog

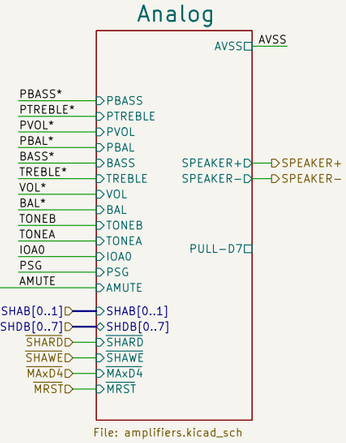

File: amplifiers.kicad_sch

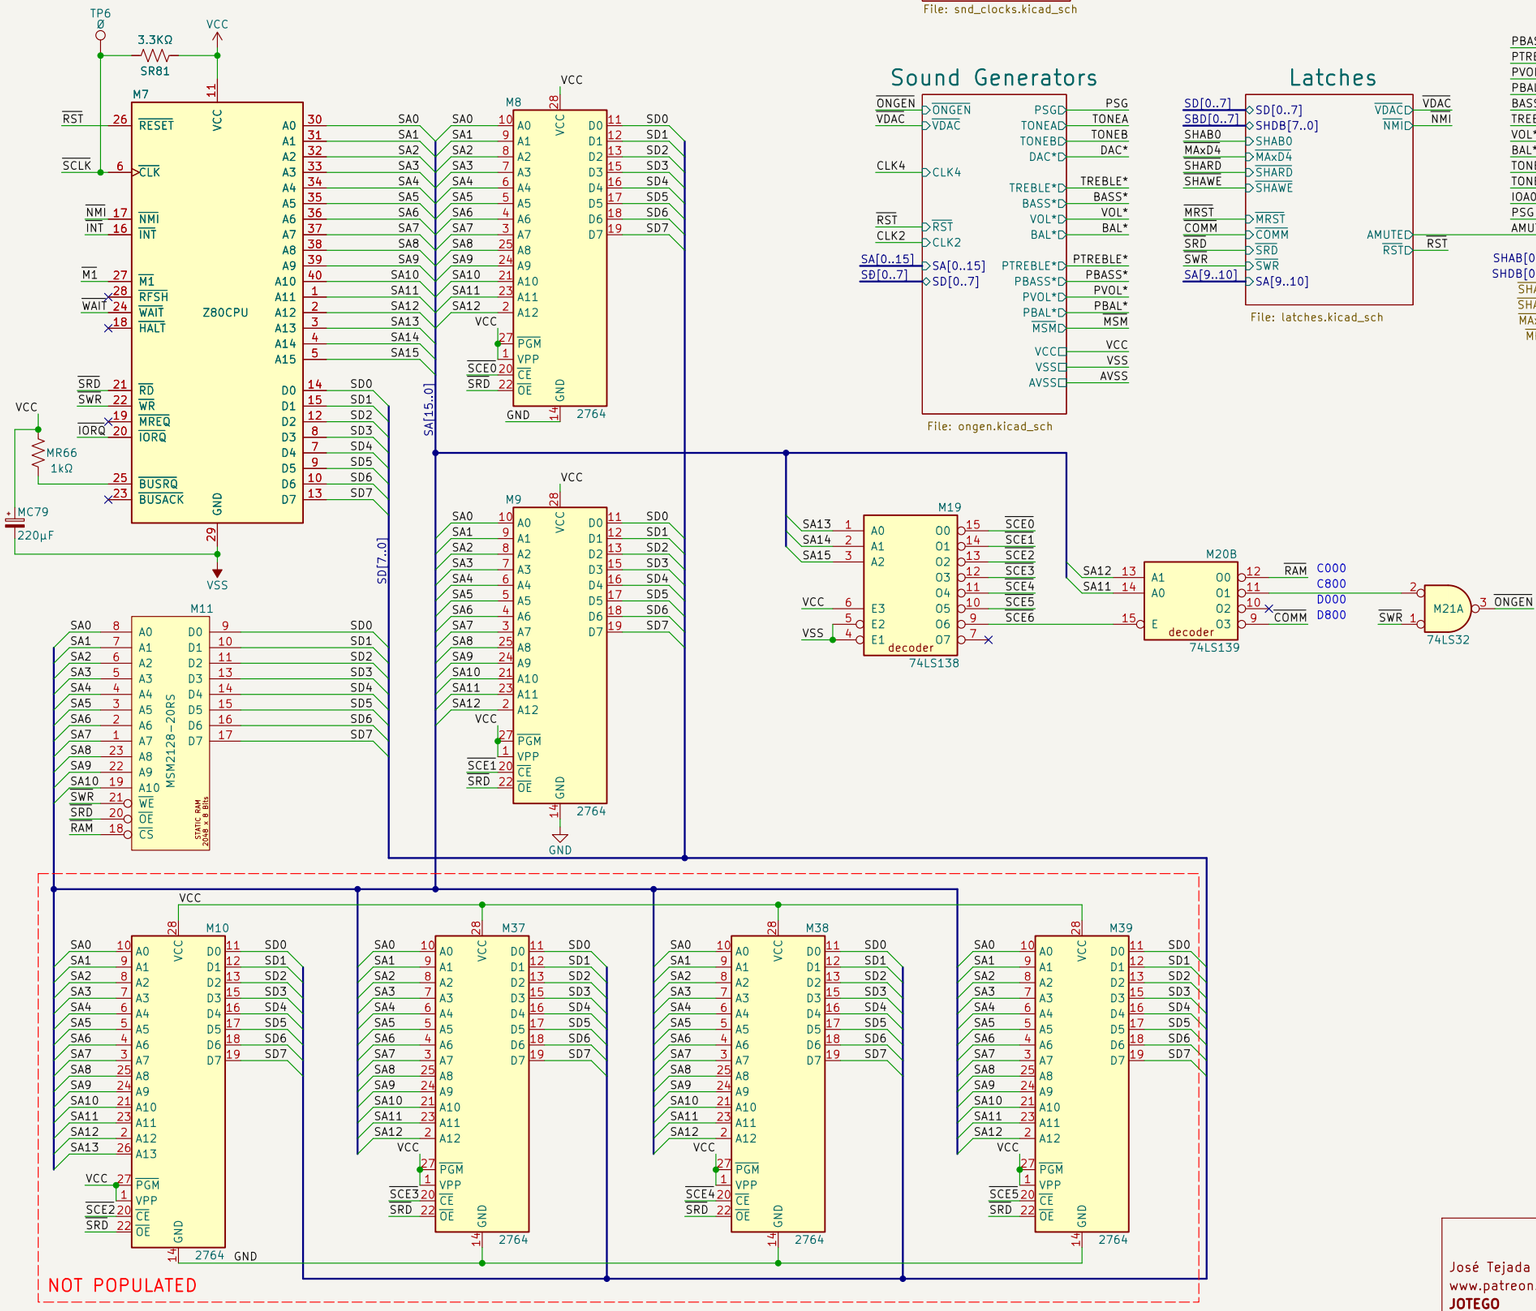

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Sound/
File: sound.kicad_sch

Title: Sound Board

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 4/20


PULL-D7
MC40 472K
MR33 1MΩ
MR32 20MΩ
MR82 1.5kΩ
VSS
M4B MC3301P
DA TEST
MC39 104K
MR38 4.7kΩ
MR34 20MΩ
MC41 151K
+12V
MC18 332K
MC19 473K
MC20 104K
MC21 104K
MC79 104K
MC81 104K
MR11 1.5kΩ
MC24 47µF
M4E MC3301P
MR83 10kΩ
MR36 5kΩ
MC68 10µF
MR37 1MΩ
UK TEST? M12
NOT POPULATED
M4C MC3301P
MR2 7.6kΩ
MR41 1MΩ
VR1 R_P_US
MR3 1kΩ
MC15 472K
MC1 10µF
MC16 47µF
MR6 100kΩ
M2
TA7630P
DUAL VOLUME/BALANCE /TONE(BASS/TREBLE)
REF_SIG TH(2) TL(2) TL(1) TH(1) VCC
Vref Balance Volume Bass Treble VSS
IN-2 IN-1 OUT-2 OUT-1
MR14 10kΩ
MR16 10kΩ
MR10 1.5kΩ
MR15 75kΩ
MR17 75kΩ
MC26 104K
MR85 1MΩ
OUT-1
M4D MC3301P
TEST KG
MR84 1MΩ
MC15 10µF
MR35 4.7kΩ
MR86 1MΩ
MC69 3.3
MR40 1MΩ
M4A MC3301P
MC70 3.3
MR39 1MΩ
PSG
MR8 10kΩ
MC17 104K
MR9 1kΩ
MR7 10kΩ
+12V
MR13 1.5kΩ
7.7V
MC83 104K
MC25 47µF
MR12 2.7kΩ
MR48 1MΩ
CTLREF
MR49 560kΩ
PTREBLE
M5C MC3301P
1MΩ MR52
472K MC74
PBALD
MR43 560kΩ
CTLREF
MR42 1MΩ
M5B MC3301P
MR47 1MΩ
MC71 472K
MC72 472K
MR46 1MΩ
M5A MC3301P
CTLREF
MR44 1MΩ
PVOL
MR45 560kΩ
472K MC78
1MΩ MR53
M5D MC3301P
1MΩ MR50
CTLREF
MR51 560kΩ
PBASS
For the PSG
Each analog control voltage goes
from 0.55V to 3.7V at the opamp output
Compared to the reference, that makes
from −7.15V (0V at DAC) to −4V (5V at DAC)
VCC_AMP
MC38 104Z
MC4 220µF
M1
SB3731
FEEDBACK BYPASS GND-I GND-O MUTE BS-I OUT-I N.C VCC BS-M OUT-M
MC11 104K
MC12 100µF
SPEAKER+
SPEAKER−
MC14 104K
MC13 154J
MR4 10Ω
MR5 10Ω
MR1 100kΩ
MC2 10µF
MC3 220µF
MC10 100µF
AMUTED
MC30 332K
MC31 473K
MC32 104K
MC33 104K
MC80 104K
MR25 1.5kΩ
MC34 47µF
M5E MC3301P
MC36 10µF
MR23 6.8kΩ
1.54V CTLREF
1kΩ MR22
MR24 1.5kΩ
M3
MR28 10kΩ
MR30 10kΩ
MC27 47µF
IN-2
IN-1
MR19 100kΩ
MR21 100kΩ
TONEBD
TONEAD
MC29 104K
MR18 1kΩ
MC28 104K
MR20 1kΩ
MR29 75kΩ
MR31 75kΩ
104K MC37
OUT-1
For the MSM
Each analog control voltage goes
from 0.60V to 3.7V at the opamp output
Compared to the reference, that makes
from −7.1V (0V at DAC) to −4V (5V at DAC)
MR27 1.5kΩ
7.7V
MC82 104K
MC35 47µF
MR26 2.7kΩ
BALD
MR57 620kΩ
CTLREF
MR56 1MΩ
M6A MC3301P
MR58 1MΩ
MC77 472K
M6D MC3301P
MR62 1MΩ
MR63 620kΩ
TREBLE
1MΩ MR65
472K MC76
M6C MC3301P
MR60 1MΩ
MR61 620kΩ
BASS
1MΩ MR64
472K MC75
M6B MC3301P
MR54 1MΩ
VOL
MR55 620kΩ
1MΩ MR59
472K MC73
SHAWED
JP2 SJ
PIN 27 SOCKET
NOT USED − B49
SC1
MRSTD MAxD4D SHARDD
SHDB[0..7]
SHDB7 SHDB6 SHDB5 SHDB4 SHDB3 SHDB2 SHDB1 SHDB0
SHAB[0..1]
SHAB1 SHAB0
AVSS VCC PWR_FLAG
L40 SPEAKER+
L39 SPEAKER−
C39 103
C40 103
NO MOUNTED
Conn_01x10_Pin
MN1
C6 104Z
MC7 220µF
L38 L_Small
C8 104Z
MC9 220µF

José Tejada
www.patreon.com/jotego
JOTEGO


Sheet: /Sound/Analog/
File: amplifiers.kicad_sch

Title: Analog Signal Processing

Size: A3	Date: 2024-11-16	Rev:
KiCad E.D.A. 10.0.4		Id: 17/20

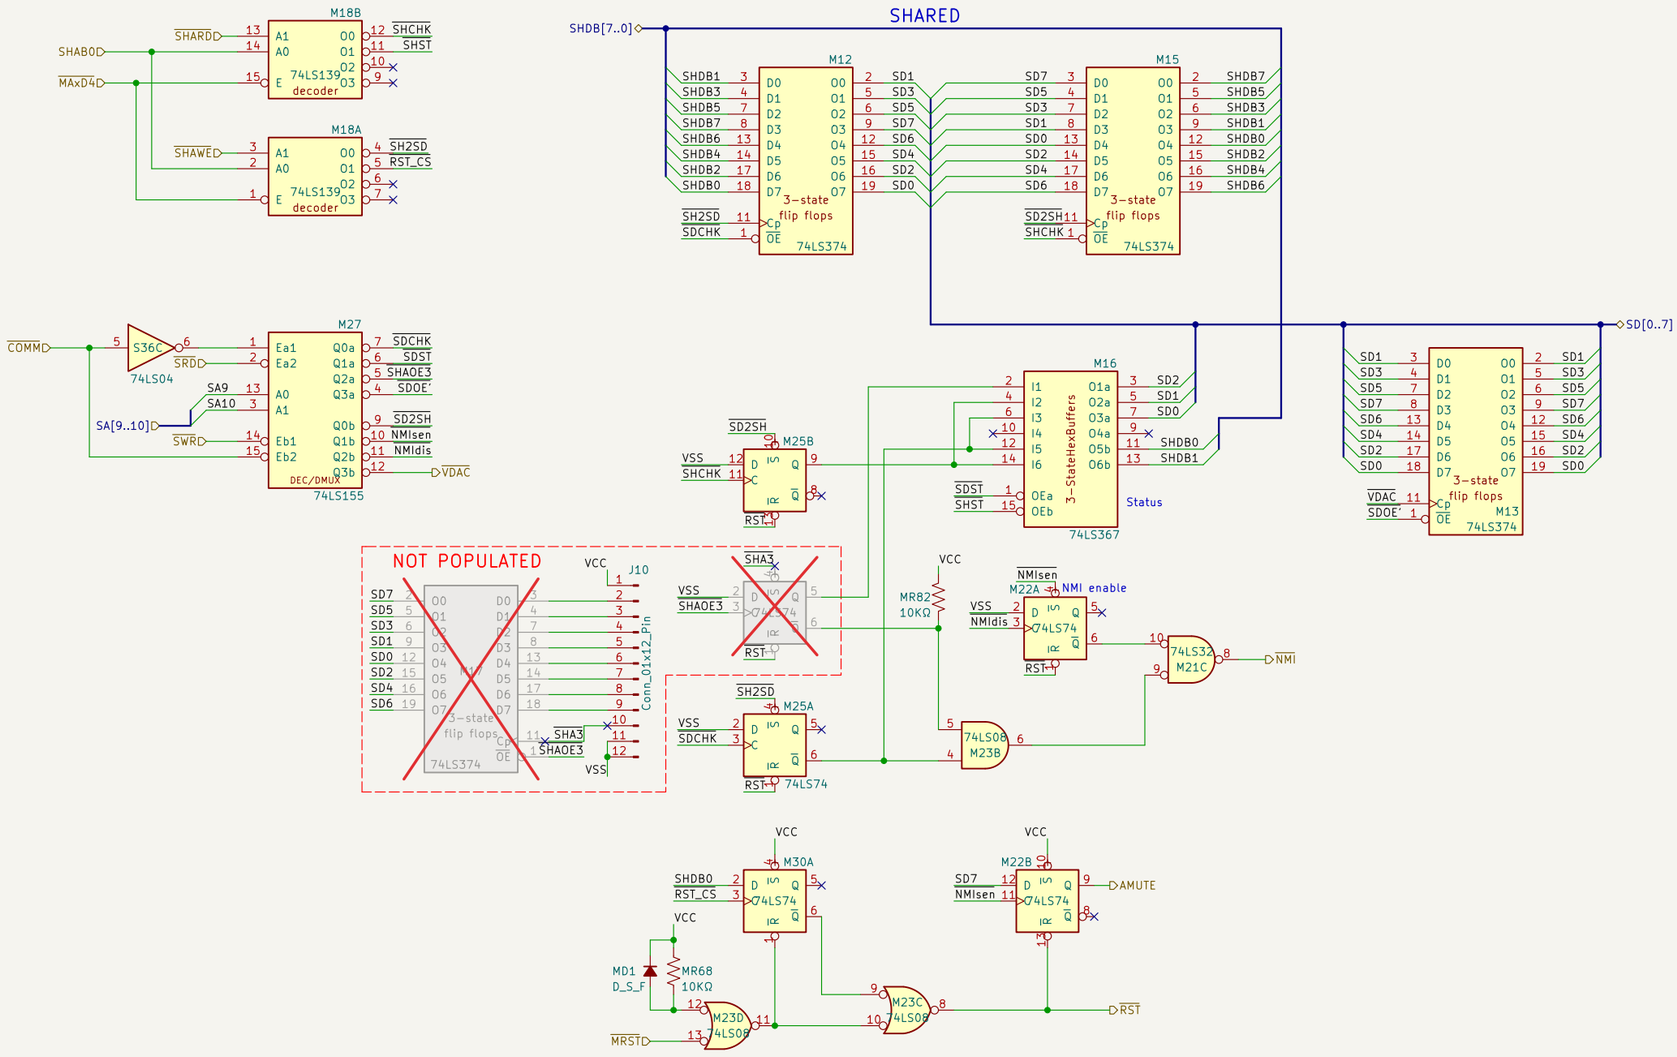

José Tejada	
www.patreon.com/jotego	
JOTEGO	
Sheet: /Sound/Latches/	
File: latches.kicad_sch	
Title: Communication Latches	
Size: A3	Date: 2024-11-16
KiCad E.D.A. 10.0.4	Id: 18/20
	Rev:

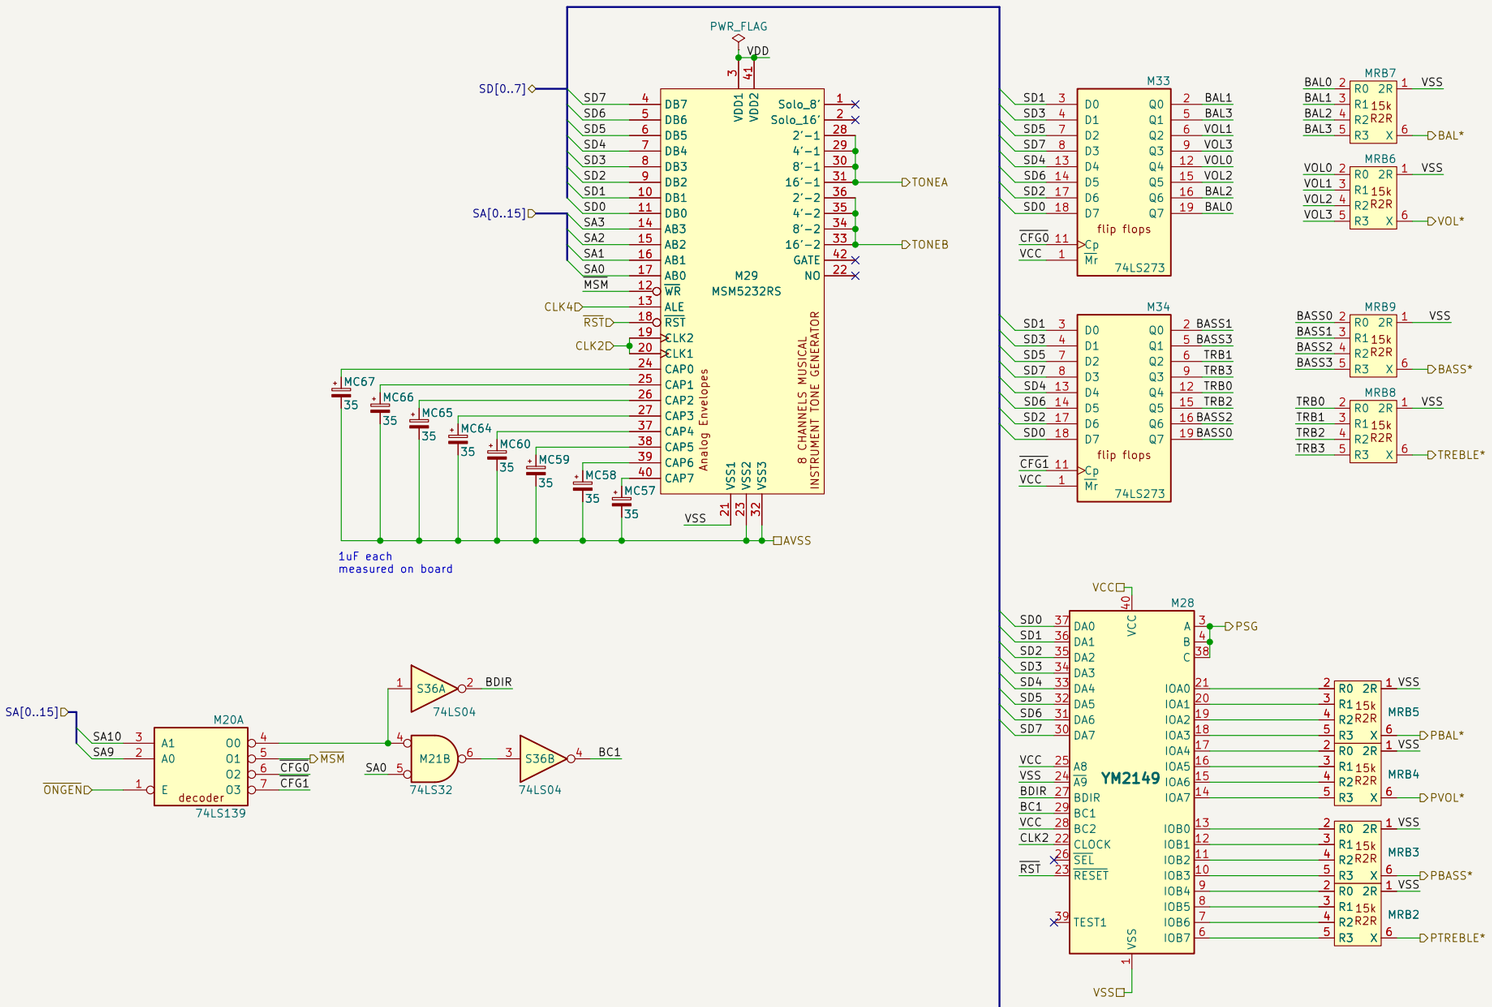

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Sound/Sound Generators/
File: ongen.kicad_sch

Title: Sound Generators

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 19/20

Access to sound generators
comes with one wait state


MSM5232 address latch
is triggered automatically
when a write occurs


José Tejada
www.patreon.com/jotego
JOTEGO


Sheet: /Sound/Clocks/
File: snd_clocks.kicad_sch

Title: Sound Clock Generation

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 20/20

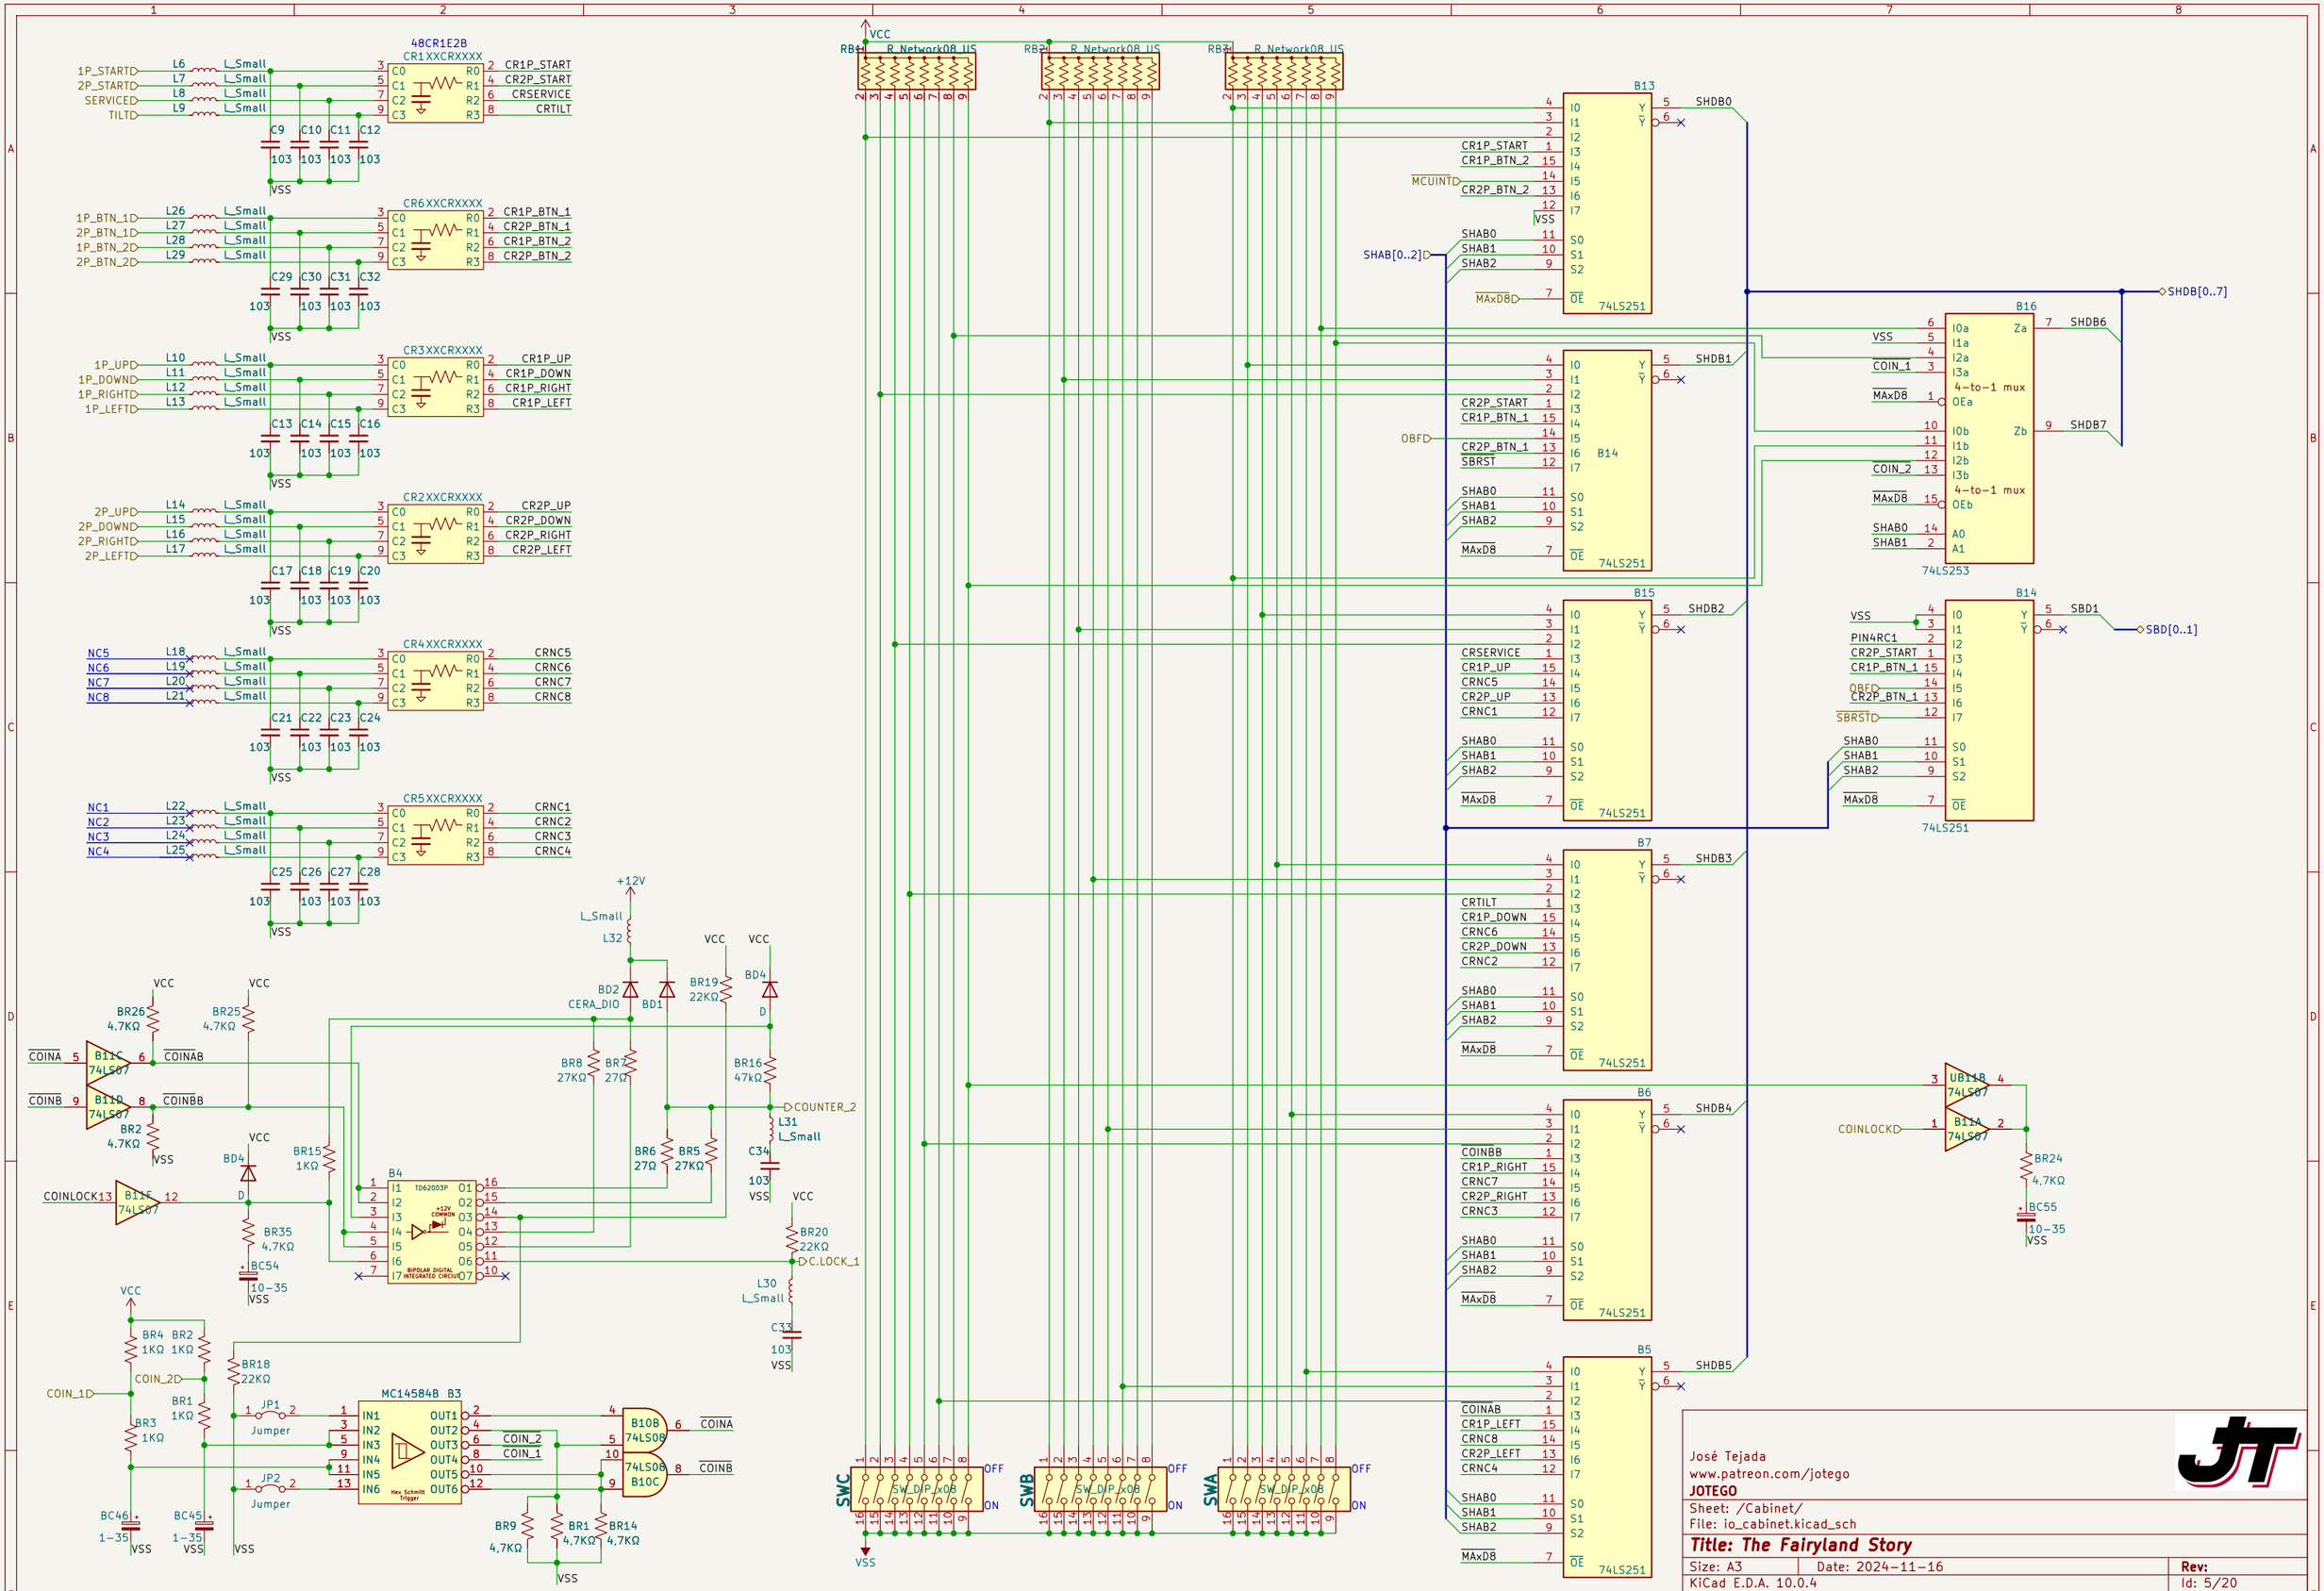

48CR1E2B
CR1XXCRXXXX
1P_START
2P_START
SERVICE
TILT
CR1P_START
CR2P_START
CRSERVICE
CRTILT
CR6XXCRXXXX
1P_BTN_1
2P_BTN_1
1P_BTN_2
2P_BTN_2
CR1P_BTN_1
CR2P_BTN_1
CR1P_BTN_2
CR2P_BTN_2
CR3XXCRXXXX
1P_UP
1P_DOWN
1P_RIGHT
1P_LEFT
CR1P_UP
CR1P_DOWN
CR1P_RIGHT
CR1P_LEFT
CR2XXCRXXXX
2P_UP
2P_DOWN
2P_RIGHT
2P_LEFT
CR2P_UP
CR2P_DOWN
CR2P_RIGHT
CR2P_LEFT
CR4XXCRXXXX
NC5
NC6
NC7
NC8
CRNC5
CRNC6
CRNC7
CRNC8
CR5XXCRXXXX
NC1
NC2
NC3
NC4
CRNC1
CRNC2
CRNC3
CRNC4
VSS
VCC
+12V
R_Network08_US
RB1
RB2
RB3
B13
B14
B15
B7
B6
B5
74LS251
SHAB[0..2]
MCUINT
OBF
SBRST
MAxD8
SHDB0
SHDB1
SHDB2
SHDB3
SHDB4
SHDB5
SHDB[0..7]
B16
74LS253
4-to-1 mux
SHDB6
SHDB7
SBD1
SBD[0..1]
PIN4RC1
COIN_1
COIN_2
COINLOCKD
B11C
B11D
B11E
B11A
B11B
74LS07
COINA
COINB
COINAB
COINBB
BR2
BR4
BR25
BR26
BR35
BR24
BC54
BC55
BC45
BC46
10-35
B4
TD62003P
BIPOLAR DIGITAL INTEGRATED CIRCUIT
MC14584B B3
Hex Schmitt Trigger
JP1
JP2
Jumper
B10B
B10C
74LS08
BD1
BD2
BD4
CERA_DIO
BR19
BR8
BR7
BR16
BR6
BR5
BR15
BR20
BR18
BR1
BR9
BR14
COUNTER_2
C.LOCK_1
L31
L30
C34
C33
SWC
SWB
SWA
SW_DIP_X08
OFF
ON
José Tejada
www.patreon.com/jotego
JOTEGO
Sheet: /Cabinet/
File: io_cabinet.kicad_sch
Title: The Fairyland Story
Size: A3
Date: 2024-11-16
KiCad E.D.A. 10.0.4
Rev:
Id: 5/20

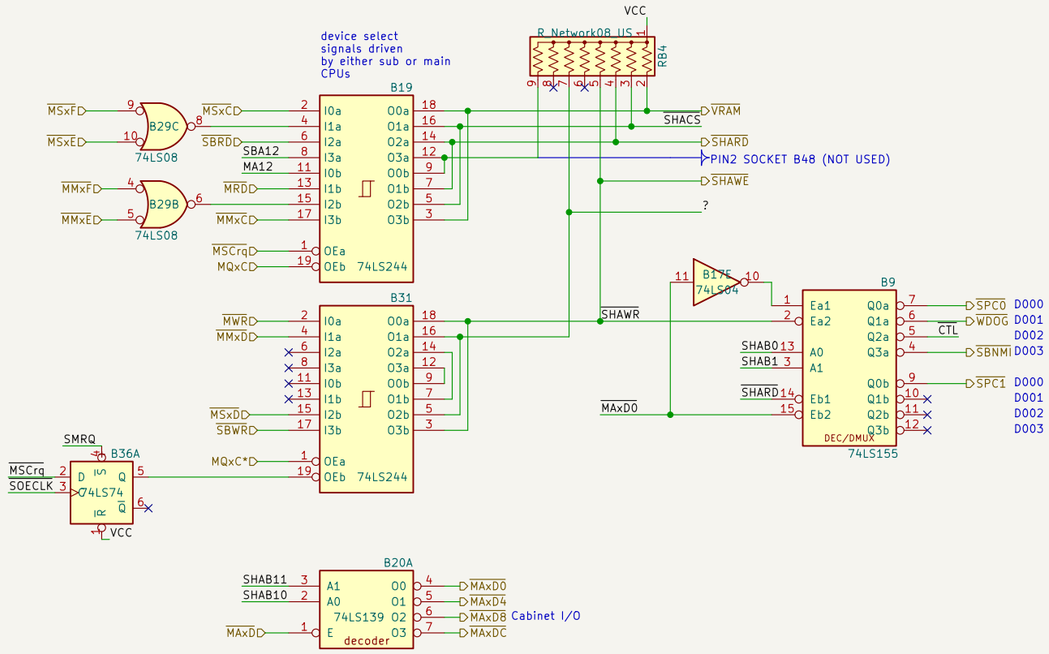


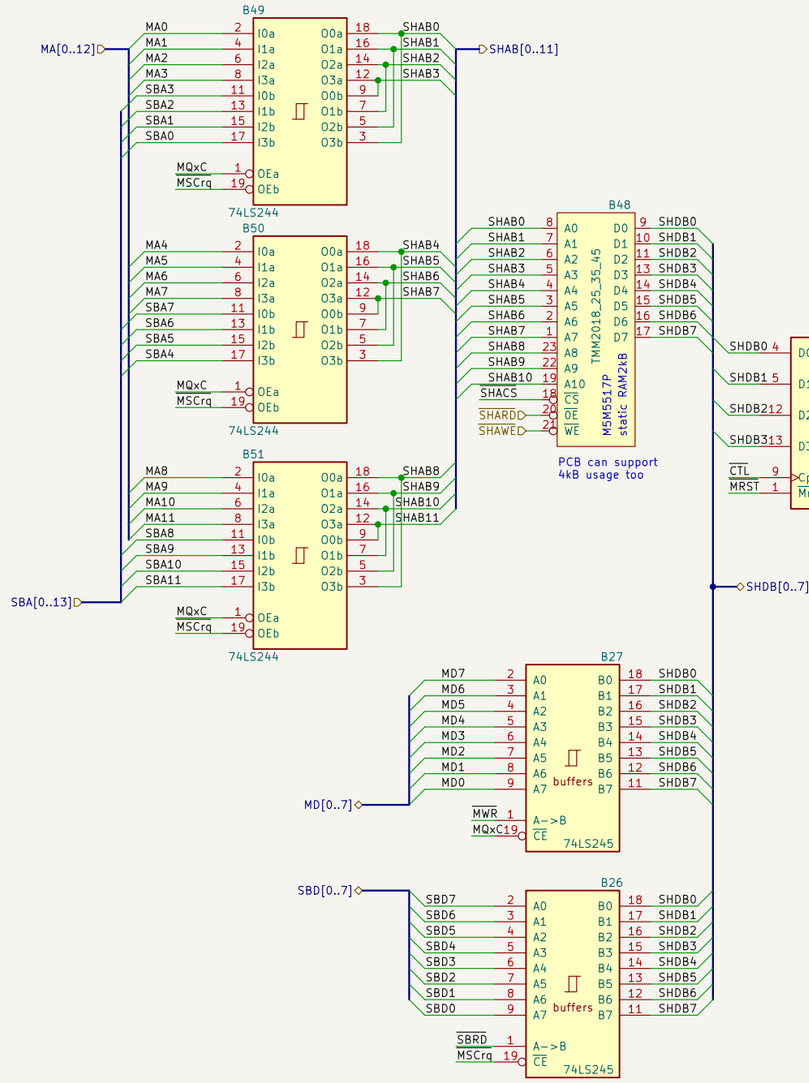

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Shared/		
File: shared.kicad_sch		
Title: Shared bus and RAM		
Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 6/20

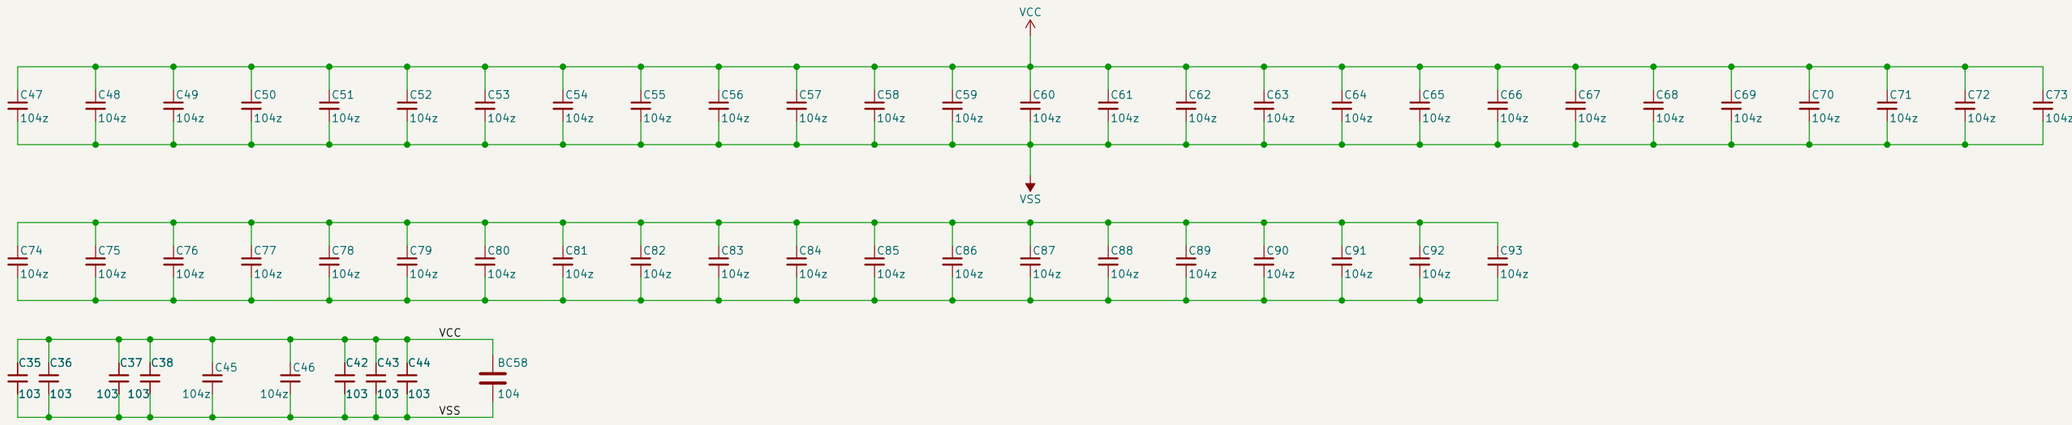

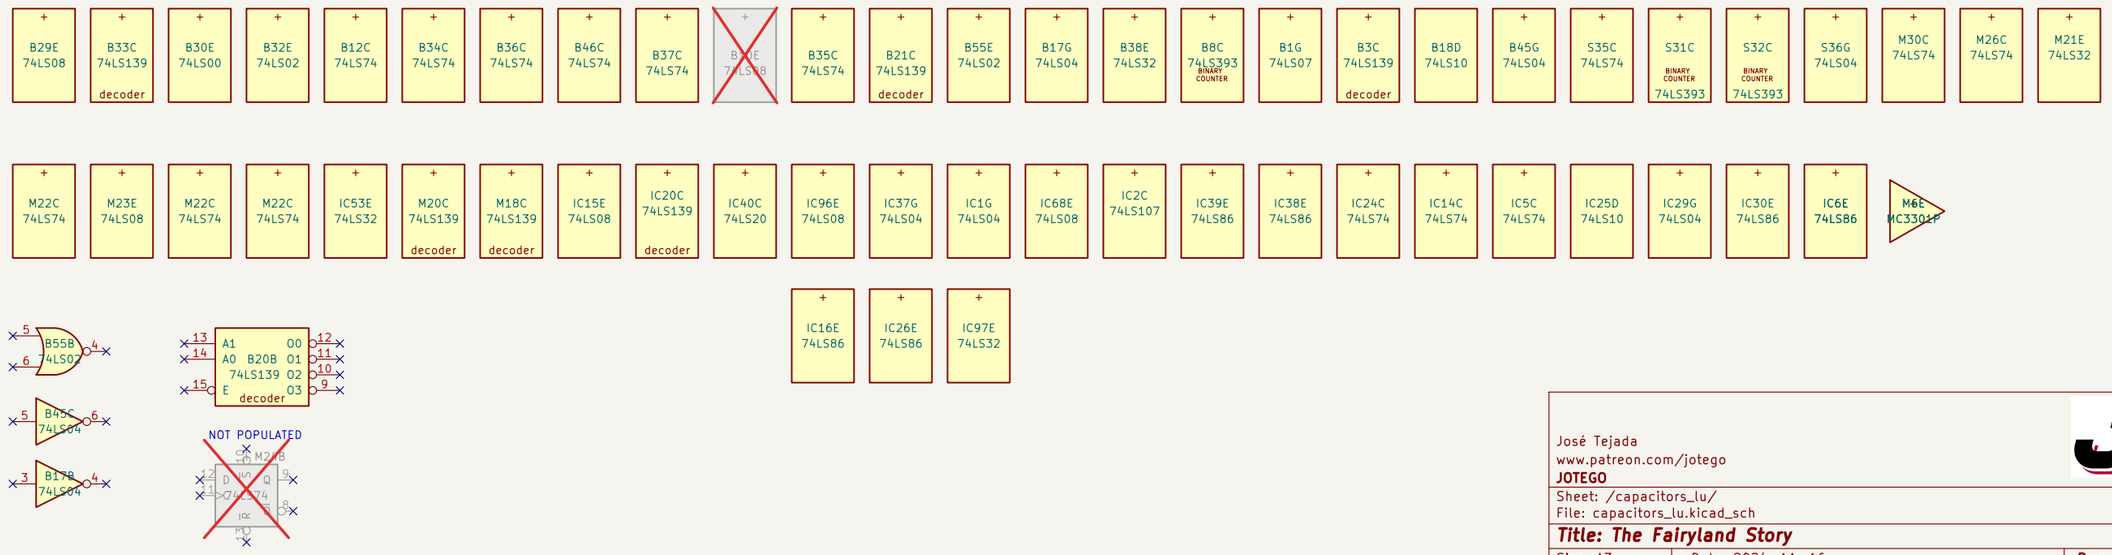


José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /capacitors_lu/
File: capacitors_lu.kicad_sch

Title: The Fairyland Story

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 7/20

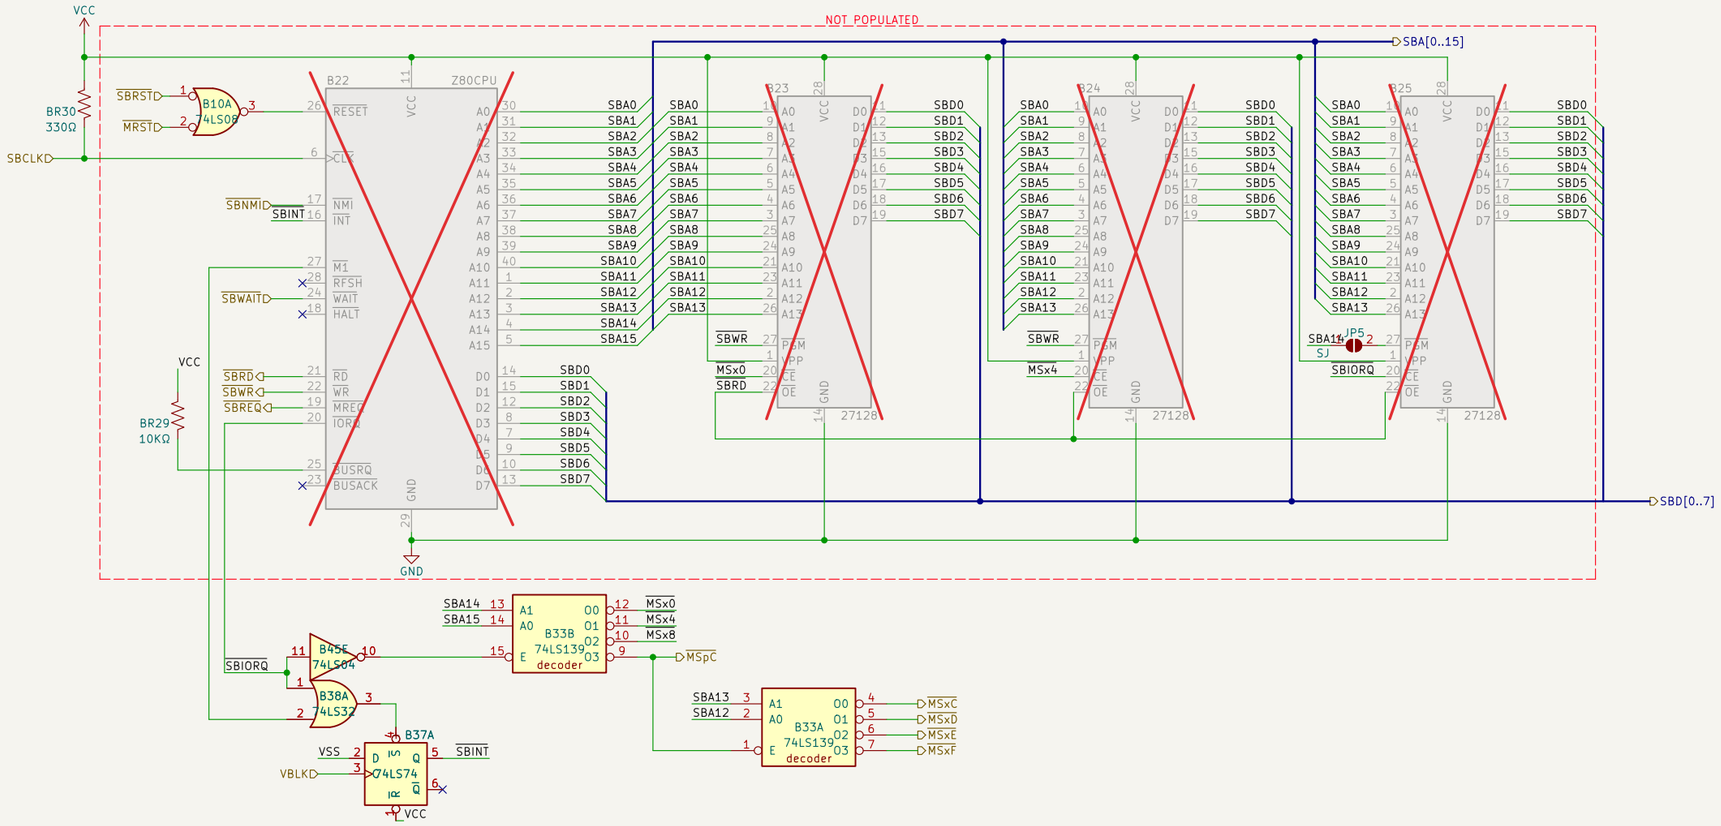

José Tejada
www.patreon.com/jotego
JOTEGO

Sheet: /Sub/
File: sub_main.kicad_sch

Title: Subsidiary CPU

Size: A3	Date: 2024-11-16	**Rev:**
KiCad E.D.A. 10.0.4		Id: 8/20