


Lowband user guide

Lowband is a **Hi8 tape played back on a Video8 deck, for Resolume Arena and Avenue**, as an FFGL effect. It does not paint a "bad tape" look over the clip. It records the clip's brightness the way a Hi8 camcorder does — as a radio-frequency carrier that swings between 5.7 and 7.7 MHz — and plays it back through a Video8 deck, which was built for a carrier between 4.2 and 5.4 MHz. The blown highlights, the glow trailing every bright edge, the lifted black, the black streaks and the highlights that dissolve into sparkle are what a deck does with a carrier it was not built for.

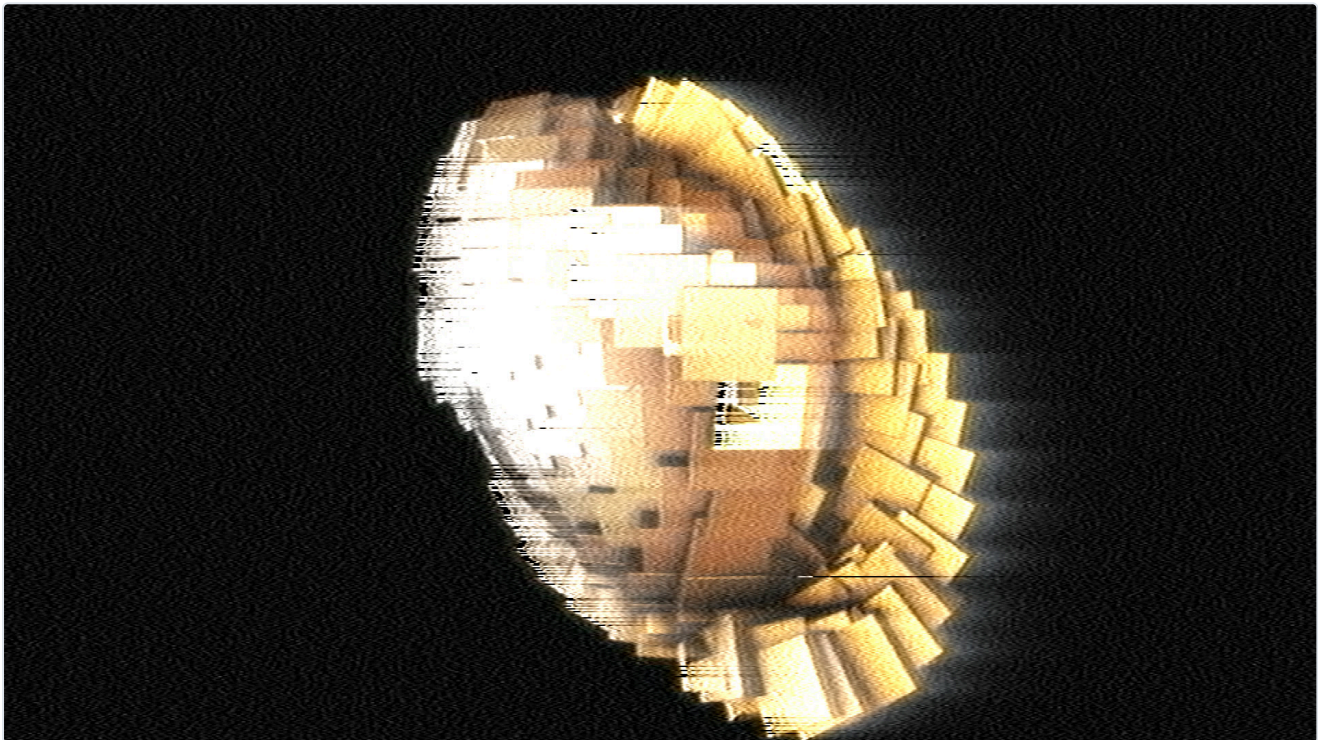

Resolume's bundled demo clip Metalive at the defaults. Rendered by the offline harness, not captured from Resolume.

Before you rely on this: released at **v0.1.0**, and honestly early. The deck is measured rather than asserted, by a harness that drives the real plugin class and the signal engine it runs, at 320×180 , 960×540 and 1280×720 and again on Apple's software renderer: the recorded carriers, counted crossing by crossing, are the formats' own (Hi8 5.7 and 7.7 MHz, Video8 4.2 and 5.4 MHz); a deck playing its own format gives a flat field back to $3e-4$ of white; a Hi8 tape on the Video8 deck has a gain of 1.66675 against the $2.0 / 1.2 = 1.66667$ the formats predict; the glow's tail decays with $1.30\text{--}1.32 \mu\text{s}$, the Video8 deck's own de-emphasis; the lifted black is within 4 % of what the sync left in the back porch predicts; and at the same tape noise a Hi8 tape's white is 2.6 times as noisy as its black, where a Video8 tape's is 1.02. Twelve deliberately broken models are each shown to fail their check, and all 8 controls are shown to change the picture. **The checks verify the stated model, not a real deck:** no recording of a real Hi8 tape on a real Video8 machine was found to compare against, so the look is the model's prediction, and the deck's band is a decoder's stand-in (see Where the numbers come from). On macOS it has **never been loaded into Resolume**; the one host it has run in there is the fleet's own test host, `oxbow`. On Windows, a CI build of v0.1.0 loads, registers and renders in Resolume Arena 7.27.1, with all 14 host controls matching what the plugin declares, and 7 of the 9 that can move the picture shown doing so. Dropouts and Standard could not be shown there: the tape noise changes every frame, and their change to a single frame was no bigger than that. On software rendering, so that says nothing about a GPU or about speed. Try it on a spare layer before you put it in a show.

This codebase was created with AI assistance, directed and reviewed by a human author.

Installing

Every download carries one effect, **SW Lowband**. Drop it into Resolume's effects folder and restart Resolume:

```
macOS    ~/Documents/Resolume Arena/Extra Effects/  
Windows  %USERPROFILE%\Documents\Resolume Arena\Extra Effects\
```

Avenue uses the same layout under its own folder name. The effect then appears in the effects browser as **SW Lowband**.

The macOS download is a universal build (Apple silicon and Intel), as a `.dmg` or a `.zip`. It is Developer ID-signed and notarised by the release pipeline after publication, so the bundle simply loads; if macOS refuses a download, it predates the signing — download it again. The Windows download is an x64 installer or a `.zip`. It is not code-signed, so the installer trips SmartScreen once: **More info** → **Run anyway**.

The tape and the deck, not the look

Video8 and Hi8 both record the picture's brightness as a **frequency**: a carrier that sits low for the sync pulses and black and swings up for white. Video8 uses 4.2 MHz for the sync tip and 5.4 MHz for peak white. Hi8, which came four years later, moved the whole carrier up — 5.7 MHz to 7.7 MHz, with 2.0 MHz of swing instead of 1.2 — so it could carry finer detail, and it shortened the pre-emphasis that boosts fine detail before recording from 1.3 μ s to 0.47 μ s. The colour, recorded separately underneath at 732 kHz (PAL) or 743 kHz (NTSC), stayed exactly where it was.

A Video8 deck reads a Hi8 tape with a head, a channel, a demodulator, a scale and a de-emphasis built for its own carrier. Lowband models each of them on a real FM signal — recorded, filtered, limited, demodulated by counting zero crossings 40.5 million times a second — and the picture falls out:

the mismatch	what comes out
the deck maps 1.2 MHz of swing to the whole picture; the tape swings 2.0	contrast 5/3 too high : midtones bright, highlights clipped
Hi8's short pre-emphasis undone by Video8's long de-emphasis	a glow trailing right of every bright edge: a step lands half-way at once and creeps the rest
the same on the sync pulse's trailing edge, read by the monitor's clamp	the black lifts , about 5 % on PAL and 6 % on NTSC
the pre-emphasis overshoot at a bright edge, near 10 MHz, outside the Video8 deck's band	black streaks just after bright edges
white's carrier furthest outside the band, the tape noise the same everywhere	highlights break up first under tape noise; the darks hold
the colour carrier common to both formats	the colour survives : Video8's own soft colour

Play a Video8 tape on the same deck, or play either tape on a Hi8 deck, and the picture is clean. That is the point of the Recording and Deck controls: they are the reference.

How this differs from Colourunder, Ferric and Old Cathode

- **Colourunder** is VHS's colour system and its heads: the narrow, late chroma, the head switch, the tracking bar, the dropout compensator. Its luma is a noise shape, never a carrier. Lowband is the luma carrier and nothing else of that, so the two stack: Colourunder after Lowband adds VHS's colour and tracking faults on top.
- **Ferric** is the tape transport: wow, flutter and a noise-reduction round trip. Lowband has no time-base error.
- **Old Cathode** is the broadcast composite route to a CRT. Lowband never makes a composite colour signal and has no tube.

Start here

Drop **SW Lowband** on a clip. The defaults are a PAL Hi8 tape on a Video8 deck, with some tape noise, a slightly dirty head and a few dropouts: the picture is too bright and too contrasty, every highlight trails a glow to the right, the black sits a little above black, and the brightest areas break into sparkle while the darks stay clean. The output is opaque at Mix 1: a tape has no alpha.

Then:

- **Switch Recording to Video8.** The same deck with its own tape: the contrast, the glow, the lift and the sparkle all go. That is the deck working as designed, and the honest reference.
 - **Switch Deck to Hi8** (with Recording back on Hi8). A Hi8 deck plays the tape properly, and Hi8's sharper picture comes back.
 - **Raise Tape Noise or Head Clog** on a Hi8 tape and watch the whites dissolve first; do the same with Recording on Video8 and the picture gets grainy evenly instead.
 - **Bright, hard-edged shapes on black show it best.** The glow and the streaks happen at edges, and the sparkle in the brightest areas.
-

The Tape group

Recording — Video8 or Hi8: which format wrote the tape. It sets the carrier (4.2–5.4 MHz or 5.7–7.7 MHz), the swing, the pre-emphasis (1.3 or 0.47 μ s) and the camcorder's own picture sharpness (3.5 or 5.0 MHz). Hi8 is the default.

Tape Noise — the tape's and the head amplifier's noise, as a carrier-to-noise ratio. At 0 there is none. Above 0 it runs from 46 dB (barely there) to 10 dB (a ruined tape) at 1. The noise is the same at every frequency, so it hurts whichever carrier the deck's band attenuates most: on a Hi8 tape played on Video8, that is white. The default 0.6 is 24.4 dB. The pattern changes every video frame, 25 or 29.97 times a second, and is the same every time that frame is played.

Dropouts — missing oxide: the carrier drops 30 dB for 1 to 25 μ s at a random place on a random line, with soft edges. With no carrier the deck's demodulator reads noise, so a dropout is a short streak of noise. Up to 30 a frame at 1 ($30 \times \text{Dropouts}^2$, so 0.7 at the default 0.15). There is no dropout compensator; Colourunder has one.

The Deck group

Deck — Video8 or Hi8: the machine. A Video8 deck has one mode and reads every tape as Video8. A Hi8 deck recognises the format of the tape and plays each in its own mode, so it plays both cleanly. The default is Video8.

Standard — PAL or NTSC: the line timing (576 or 480 active lines), the sync's depth (0.3 V of 1 V on PAL, 40 IRE of 140 on NTSC), the drum's writing speed (3.14 or 3.77 m/s) and the frame rate the noise refreshes at. NTSC is modelled without set-up (black at blanking, the Japanese convention).

Head Clog — dirt or wear between the head and the tape, as extra spacing, 0 to 0.15 μm . A head reading through a gap loses the short wavelengths first: Wallace's law, 54.6 dB per wavelength of spacing. So the high carriers lose most — a Hi8 tape's white before its black, and Hi8 before Video8. The default 0.4 is 0.06 μm : about 4 dB off Video8's sync tip and 8 dB off Hi8's peak white on PAL. The clog costs carrier, not noise, so it shows only with some Tape Noise.

The Monitor group

Sync AGC — off, the monitor does what a television's video input does: it sets black from the back porch of every line and nothing else, so a Hi8 tape on a Video8 deck is 5/3 too contrasty. On, it also scales the picture so the sync pulse is its proper height. That takes back only part of the excess, because the sync is read through the same mismatched emphasis and measures short: a Hi8 tape on the Video8 deck ends at about 1.2 times its proper contrast instead of 1.7.

Mix — back to the clip. At 1 the output is fully opaque; below 1 the output's alpha moves back toward the clip's.

Where the numbers come from

Some of the formats' figures are solid and some are not. This is the honest state of each. [ATTRIBUTIONS.md](#) in the repository has the sources in full.

figure	value here	status
FM carriers	Video8 4.2 / 5.4 MHz, Hi8 5.7 / 7.7 MHz (sync tip / peak white)	confirmed: a Sencore service note, Wikipedia and the vhs-decode project agree
colour-under carrier	732.42 kHz PAL (46.875 fH), 743.44 kHz NTSC (47.25 fH)	one source (vhs-decode); Sencore gives 743 kHz. Informational: the colour is band-limited, not heterodyned
emphasis time constant	Video8 1.30 μ s, Hi8 0.47 μ s	unconfirmed: vhs-decode only (Hi8's marked "from spec")
emphasis shelf	11.58 dB, both formats	unconfirmed: vhs-decode only, and the shelf's shape is this plugin's reading of a time constant and a gain
white and dark clips	220 % above the sync tip, 90 % below blanking	unconfirmed: a vhs-decode comment on Hi8, with a question mark, applied to Video8 too
the deck's band	1.9 to 7.0 MHz (Video8), 1.85 to 10.3 MHz (Hi8)	a stand-in: the filters vhs-decode puts on a capture of each format's signal, in place of a deck's head, equaliser and RF stage, which no source here describes. The streaks and the sparkle live at its upper edge, so this is the number the look depends on most
the picture's sharpness	3.5 MHz (Video8), 5.0 MHz (Hi8) after the demodulator	vhs-decode; the camcorder's own is assumed the same
writing speed	3.14 m/s PAL, 3.77 m/s NTSC	a 40 mm drum (Wikipedia) turning once a frame
head clog	54.6 d / λ dB	confirmed: Wallace, Bell System Technical Journal, 1951
what a real Video8 deck shows on a Hi8 tape	—	not found: forum summaries say snow and streaking; a Sony patent says only that the picture "tends to be disturbed"
noise levels, clog range, dropout rate and length, filter orders	see the controls above	chosen , not sourced

How it works

The host picture is averaged down onto the standard's raster (701 $\times$ 576 on PAL, 711 $\times$ 480 on NTSC — the active line sampled at 13.5 MHz) and read back to the CPU. There, each line becomes

a line of video — sync pulse, blanking, picture — and goes through:

- **the camcorder:** a low-pass filter, the pre-emphasis, the white and dark clips, and the FM modulator, at 40.5 MHz;
- **the tape:** the head clog (Wallace's loss as a filter), dropouts, and noise;
- **the deck:** its RF band, a limiter, a pulse-count demodulator (a unit of charge at every zero crossing, smoothed), its low-pass, its own scale back to volts and its de-emphasis;
- **the monitor:** the back-porch clamp, and the sync AGC if it is on.

The colour is band-limited to the colour-under band (half amplitude at 0.5 MHz) and joined back on. The deck's picture goes back to the GPU and is drawn into the composition: each row its nearest line, smoothly across.

- Eight lines run side by side, on up to eight worker threads; a line's result never depends on how many.
- Every line starts from its own previous line in the same field, so the filters are settled.
- The deck's own delay is taken out, as a delay line in a real deck would; a Hi8 tape's different delay is part of the glow.

Performance

Measured by the offline harness on an M4 Max, best of three, `glFinish` both sides, at the defaults, on a machine running other builds:

	ms a frame	% of a 60 fps frame	memory held
1280 × 720	3.9	23 %	26 MB
1920 × 1080	4.2	25 %	26 MB
3840 × 2160	5.3	32 %	26 MB

About 2.6 ms of that is the signal chain on the CPU (8 worker threads), the rest the GPU's work and the copies between them. The composition's size barely matters: the chain always runs on the standard's own raster. This is heavier than most Stoa²works effects; if a show is tight, run it on one layer, not all of them. Nothing was timed inside Resolume, and nothing was timed on Windows, where the chain may be slower.

If it looks wrong

It just looks too bright. That is the first thing a Hi8 tape on a Video8 deck does: 5/3 the contrast. Turn Sync AGC on, or put a levels effect after it.

There is no sparkle. The highlights break up only with some Tape Noise or Head Clog, and only where the picture is bright. Raise Tape Noise, or try a clip with large bright areas.

There are no streaks. They follow edges from dark to bright, left to right. Soft clips have few.

Video8 looks clean and Hi8 does not, on the Hi8 deck too. Check Deck: a Hi8 deck plays both formats cleanly; only the Video8 deck has the trouble.

SW Lowband is not in the effects browser. Check the folder under Installing, and that Resolume was restarted.

The effect does nothing at all. A shader that will not compile looks exactly like that, and the real message is in the log:

```
macOS    ~/Library/Logs/lowband/lowband.YYYY-MM-DD.log
Windows  %LOCALAPPDATA%\lowband\logs\lowband.YYYY-MM-DD.log
```

Known limits

- **The look is a prediction.** No recording of a Hi8 tape on a Video8 machine was found to check it against, and the deck's band is a decoder's stand-in, not a real deck's head and filters.
- **The emphasis is the main shelf only**, with no non-linear emphasis; the clips are a guess.
- **No head switch, no tracking, no time-base error, no dropout compensator, no colour noise** — Colourunder and Ferric have those, and stack with this.
- **The colour is a plain band-limit**, the same for both tapes, not a heterodyne.
- **Never loaded into Resolume on macOS.** Everything numeric was compiled, rendered and measured offline against the real plugin class in a headless CGL context, plus an `oxbow` load.
- **Never seen on camera footage**, only on Resolume's bundled CG loops.
- **Only ever run on an Apple M4 Max**, although the macOS build contains an Intel slice.
- **No presets and no OpenFX version.** There is a [browser demo](#), but it runs a JavaScript port of the engine. A script in the repository checks the port against the plugin's own C++ code, but on the page you are trusting it, and it runs behind a playing clip. Treat it as a preview, not the plugin.

About

The last group, **About**, carries the plugin's name, version, licence and maker, and buttons that open this user guide (stoatworks-labs.com/software/lowband/guide/), the project page, the source on GitHub and the support page in your browser.

Video8 and Hi8 are formats; the plugin is not affiliated with, or endorsed by, Sony or any maker of camcorders or video recorders, and names are used only to describe the formats it models.

Reporting something

github.com/stoatworks-labs/lowband/issues. A screenshot, the Tape, Deck and Monitor settings, and the composition's resolution and frame rate are usually enough. If the effect did nothing, attach the log.

Lowband · v0.1.0 · guide updated 2026-10-04 · stoatworks-labs.com/software/lowband/

Latest version of this guide: stoatworks-labs.com/software/lowband/guide/ · Source and issues:

<https://github.com/stoatworks-labs/lowband>