

ZSA: Z80 Standard Architecture

A Proposal for A Z80-based DIY Computer Architecture

By K. Cardoza, G. Sutherland, et. al.

Draft Version 0.4

Abstract

This proposal will outline the physical, electrical, and software requirements for a community-owned, open-source hardware, 3.3V logic level DIY computer architecture, built around Z80 and compatible CPUs. Inspired by, and physically similar to, the Industry Standard Architecture, or ISA, bus, this bus will serve the same purpose for new, Z80-based DIY computer systems: provide an open standard to which any and all participants are welcome.

The inspiration and motivation behind this proposal is, simply put, the current reality facing computer hobbyists: 5V parts are becoming harder to find, while 3.3V parts are plentiful, inexpensive, and far more broad in their natures and selection. Moving from a 5V standard logic to 3.3V opens up a new world of potential, enabling the use not only of more modern surface-mount logic and memory and processor devices, but CPLDs, FPGAs, microcontrollers, and specialized ASICs which all default to 3.3V logic levels.

A 3.3V standard for DIY computer kits and accessories will enable the use of all these components and many more than can be enumerated here, as well as enable the use of modern, high-quality, economical PCB fabrication and population facilities provided to the modern hobbyist by such services as PCBWAY and JLCPCB, among others.

Such a standard will also enable small businesses and craftspeople, such as might be found among the sellers on Tindie, to build original products for a common platform.

Definitions

The terms below are to be interpreted with the following definitions:

1. "The standard" refers to this document.
2. "Backplane" means a PCB with female edge connector slots meant to provide power and signal connections to expansion cards.
3. "Expansion card" means a PCB which is designed to connect to the ZSA bus using the 70-pin edge connector.
4. "Implementation" means a physical product or design meant to be used under this standard.
5. "Conforming implementation" means an implementation which meets all "MUST" and MUST NOT requirements, and is thus entitled to carry the conformance marks and advertise its conformance to the standard.

6. “Coforming backplane” means a backplane which is a conforming implementation.
7. “Conforming expansion card” means an expansion card which is a conforming implementation.
8. “Conforming system” means a collection of one or more conforming implementations which collectively implement a usable computer system compliant with this standard.
9. “MUST” means that an implementation is not compliant if it does not meet the listed requirement.
10. “MUST NOT” means that an implementation is not compliant if it does what is listed in the rule.
11. “MAY” means that an implementation’s compliance status is neither confirmed nor denied by the inclusion or absence of the designated attribute(s).
12. “EITHER” means that a requirement is for a “MAY” or “MUST” rule in one of two ways, separated by an “OR”.
13. “Implementation defined” means that the specific methods and designs of a requirement are left to the designer of the conforming implementation to decide.
14. “Z80 CPU” means a processor, or emulation of a processor¹, which is logically and electrically compatible with the ZSA bus and executes Z80 opcodes.
15. The “rear” edge of an expansion card is the edge which has the Keystone mounting holes.
16. The “front” edge of an expansion card is the edge directly opposite the rear edge.
17. The “top” edge of an expansion card is the edge directly opposite the male 70 pin edge connector.
18. The “bottom” edge of an expansion card is the edge which has the 70 pin male edge connector.

¹ This includes FPGA and microcontroller-based CPU emulations.

1. Bus Signals

1. The bus of this standard is carried on female edge connectors with a pin pitch of 2.54mm.
2. Through-hole female connectors are recommended for mechanical strength.
3. All signals are specified to use 3.3V logic levels, and are assumed to be 5V-intolerant.
4. The bus consists of 50 signals with a 70-pin edge connector².
5. Each signal on the board is adjacent to a ground pin, either on the same side of the connector or directly opposite.
6. A conforming backplane MUST provide, for each expansion slot, EITHER a two pin 2.54mm pitch pin header OR a SPST switch, which links the /INT2IN and /INT2OUT pins when connected.
7. A conforming expansion card MUST pass signals from /INT2IN to /INT2OUT, even if it does not use those pins itself.
8. A conforming expansion card which makes use of the /INT2OUT signal MUST block signals from /INT2IN at any time when it is asserting the /INT2OUT signal.
9. A conforming expansion card MAY connect unidirectional TVS diodes between all data lines and ground, physically near the card edge connector. If TVS diodes are present
 1. they MUST be rated for a minimum of 50MHz during normal operation, AND
 2. must have a junction capacitance not exceeding 5pF.
10. A conforming backplane, which provides more than eight expansion slots, MUST provide implementation-defined buffering of the address and data lines, with no less than one set of buffers for every eight expansion slots.
11. Pin 67 of the bus connector is defined as a 1.524mm by 5mm pin, aligned to the top of the row of pins; being shorter than the other pins, Pin 67 will only be connected when all other signals on the bus are already connected.
 1. The purpose of pin 67 is to enable a backplane to determine which slots have cards in them, and which do not.
 2. Each of the backplane's /PD lines (one per slot) is pulled up to +3.3V by a 10K Ω resistor.
 3. Each expansion card pulls its /PD pin down to ground through a 4.7k Ω resistor.
 4. For each such slot, one of the bits in a latch (connected to an I/O register) is pulled low. This enables the CPU to detect which slots have cards in them.

² An example connector part which might be used is the EDAC 395-070-520-201.

5. A conforming backplane MUST implement pin 67 and its supporting logic for all slots it provides.
6. Provided the present/absent state of pin 67 in every set of eight card slots in a backplane can be read from a single documented I/O address (which MAY be user-configurable), the exact logic to implement /PD is implementation-defined.
7. A conforming backplane MAY also have implementation-defined logic such that connecting an empty slot's /INT2IN and /INT2OUT pins is automatic.
 1. Such a conforming backplane is exempt from having to include pin headers or SPST switches to handle the Mode 2 interrupt daisy-chaining.

2. Power

1. A conforming backplane MUST safely provide no less than 3A of peak current on the 3.3V power rail, with no less than 2500 safe continuous current.
2. A conforming expansion card MUST draw no more than a peak total of 500mA on the +3.3V rail, and no more than 400mA of continuous current.
3. A conforming expansion card MAY make use of a supplemental power source, provided that power source is referenced to the same ground level as the +3.3V rail.
 1. Such supplemental power MUST NOT be connected directly to the +3.3V rail.³

³ An example of this would be a 4-pin Molex style connector using one of an ATX power supply's drive plugs to add a +5V and +12V rail for use on the card.

3. Physical Requirements

1. A conforming backplane **MUST** place its expansion slots at a centre-to-centre distance from each other of exactly 20.3mm.
2. A conforming backplane **MAY** be physically compatible with any existing case mounting standard.
 1. Such a backplane **MUST** be clearly marked as to which case mounting standard it is compatible, on the side with the conformance mark(s).
3. A conforming backplane **MAY** use any power supply design or connector which safely provides at least the minimum required current on the positive voltage rail.
4. A conforming expansion card **MUST** have board dimensions and outline matching those in figure 1.
5. A conforming expansion card **MAY** make “cuts” into the top or front-facing edges of the PCB to allow for connecting “IDC” style ribbon cable edge connectors to the board.
 1. Such additional edge connectors may not cause the width or height of a conforming expansion card to exceed the limits in figure 1.
6. A conforming expansion card **MUST** have 45° bevels on the bottom corners of the edge connector, each forming a right triangle with the perpendicular sides measuring 1mm.
7. A conforming expansion card **MAY** have the mating edge of the PCB chamfered.
8. A conforming expansion card **MUST** be a PCB with a nominal thickness of 1.6mm.
9. A conforming implementation, which is a PCB with exactly four layers, **MUST** have the ground rail connected to the copper fill on two inner layers, and the +3.3V rail connected to the copper fill on the outer two layers.
10. A conforming implementation, which is a PCB with more than two layers, **MUST** connect layers whose copper fill is connected to the same rail (+3.3V or ground) using a grid of vias, spaced no more than 20mm apart.
 1. For the purposes of this requirement, all plated through holes connected to the ground and +3.3V rails count as vias.
11. A conforming expansion card **MUST** have all the mounting holes shown in figure 1.
12. The “Alternative Mounting Hole” in figure 1 is intended to be used with 18mm M3 nylon standoffs, to mechanically link cards together when the backplane is not installed into a case which makes use of the Keystone brackets.
 1. In such a case, the Keystone bracket can be removed, and the top mounting rear mounting hole used for a second 18mm M3 nylon standoff.
13. A conforming implementation **MAY** integrate the functionality of a backplane and various other functions, such as serial UARTs, memory, or even CPU, into a single PCB.

1. Such an implementation **MUST** include at least two expansion card slots.
14. A conforming expansion card **MAY** place rear-facing ports, such as (but not limited to) D-subminiature connectors, in the area between the two Keystone 9202 mounting holes on the rear-facing edge of the PCB.
 1. Those ports, when possible, **MUST** be positioned such that existing, off-the-shelf, pre-fabricated Keystone-compatible brackets can be affixed to the PCB.

4. Licensing

1. This standard is made available under the CERN Open Hardware License, version 1.2, or, at the licensee's preference, any later version.
 1. A copy of the text of the CERN Open Hardware License, version 1.2, is located in appendix A of this document.
2. A conforming implementation's schematic diagram(s) **MUST** be made available under the terms of the CERN Open Hardware License, version 1.2, or, at the designer and/or licensee's preference, any later version.

Appendix A

CERN Open Hardware License, Version 1.2

Preamble

Through this CERN Open Hardware Licence ("CERN OHL") version 1.2, CERN wishes to provide a tool to foster collaboration and sharing among hardware designers. The CERN OHL is copyright CERN. Anyone is welcome to use the CERN OHL, in unmodified form only, for the distribution of their own Open Hardware designs. Any other right is reserved. Release of hardware designs under the CERN OHL does not constitute an endorsement of the licensor or its designs nor does it imply any involvement by CERN in the development of such designs.

1. Definitions

In this Licence, the following terms have the following meanings:

“Licence” means this CERN OHL.

“Documentation” means schematic diagrams, designs, circuit or circuit board layouts, mechanical drawings, flow charts and descriptive text, and other explanatory material that is explicitly stated as being made available under the conditions of this Licence. The Documentation may be in any medium, including but not limited to computer files and representations on paper, film, or any other media.

“Documentation Location” means a location where the Licensor has placed Documentation, and which he believes will be publicly accessible for at least three years from the first communication to the public or distribution of Documentation.

“Product” means either an entire, or any part of a, device built using the Documentation or the modified Documentation.

“Licensee” means any natural or legal person exercising rights under this Licence.

“Licensor” means any natural or legal person that creates or modifies Documentation and subsequently communicates to the public and/ or distributes the resulting Documentation under the terms and conditions of this Licence.

A Licensee may at the same time be a Licensor, and vice versa.

Use of the masculine gender includes the feminine and neuter genders and is employed solely to facilitate reading.

2. Applicability

2.1. This Licence governs the use, copying, modification, communication to the public and distribution of the Documentation, and the manufacture and distribution of Products. By exercising any right granted under this Licence, the Licensee irrevocably accepts these terms and conditions.

2.2. This Licence is granted by the Licensor directly to the Licensee, and shall apply worldwide and without limitation in time. The Licensee may assign his licence rights or grant sub-licences.

2.3. This Licence does not extend to software, firmware, or code loaded into programmable devices which may be used in conjunction with the Documentation, the modified Documentation or with Products, unless such software, firmware, or code is explicitly expressed to be subject to this Licence. The use of such software, firmware, or code is otherwise subject to the applicable licence terms and conditions.

3. Copying, modification, communication to the public and distribution of the Documentation

3.1. The Licensee shall keep intact all copyright and trademarks notices, all notices referring to Documentation Location, and all notices that refer to this Licence and to the disclaimer of warranties that are included in the Documentation. He shall include a copy thereof in every copy of the Documentation or, as the case may be, modified Documentation, that he communicates to the public or distributes.

3.2. The Licensee may copy, communicate to the public and distribute verbatim copies of the Documentation, in any medium, subject to the requirements specified in section 3.1.

3.3. The Licensee may modify the Documentation or any portion thereof provided that upon modification of the Documentation, the Licensee shall make the modified Documentation available from a Documentation Location such that it can be easily located by an original Licensor once the Licensee communicates to the public or distributes the modified Documentation under section 3.4, and, where required by section 4.1, by a recipient of a Product. However, the Licensor shall not assert his rights under the foregoing proviso unless or until a Product is distributed.

3.4. The Licensee may communicate to the public and distribute the modified Documentation (thereby in addition to being a Licensee also becoming a Licensor), always provided that he shall:

a) comply with section 3.1;

b) cause the modified Documentation to carry prominent notices stating that the Licensee has modified the Documentation, with the date and description of the modifications;

c) cause the modified Documentation to carry a new Documentation Location notice if the original Documentation provided for one;

d) make available the modified Documentation at the same level of abstraction as that of the Documentation, in the preferred format for making modifications to it (e.g. the native format of the CAD tool as applicable), and in the event that format is proprietary, in a format viewable with a tool licensed under an OSI-approved license if the proprietary tool can create it; and

e) license the modified Documentation under the terms and conditions of this Licence or, where applicable, a later version of this Licence as may be issued by CERN.

3.5. The Licence includes a non-exclusive licence to those patents or registered designs that are held by, under the control of, or sub-licensable by the Licensor, to the extent necessary to make use of the rights granted under this Licence. The scope of this section 3.5 shall be strictly limited to the parts of the Documentation or modified Documentation created by the Licensor.

4. Manufacture and distribution of Products

4.1. The Licensee may manufacture or distribute Products always provided that, where such manufacture or distribution requires a licence under this Licence the Licensee provides to each recipient of such Products an easy means of accessing a copy of the Documentation or modified Documentation, as applicable, as set out in section 3.

4.2. The Licensee is invited to inform any Licensor who has indicated his wish to receive this information about the type, quantity and dates of production of Products the Licensee has (had) manufactured

5. Warranty and liability

5.1. DISCLAIMER – The Documentation and any modified Documentation are provided "as is" and any express or implied warranties, including, but not limited to, implied warranties of merchantability, of satisfactory quality, non-infringement of third party rights, and fitness for a particular purpose or use are disclaimed in respect of the Documentation, the modified Documentation or any Product. The Licensor makes no representation that the Documentation, modified Documentation, or any Product, does or will not infringe any patent, copyright, trade secret or other proprietary right. The entire risk as to the use, quality, and performance of a Product shall be with the Licensee and not the Licensor. This disclaimer of warranty is an essential part of this Licence and a condition for the grant of any rights granted under this Licence. The Licensee warrants that it does not act in a consumer capacity.

5.2. LIMITATION OF LIABILITY – The Licensor shall have no liability for direct, indirect, special, incidental, consequential, exemplary, punitive or other damages of any character including, without limitation, procurement of substitute goods or services, loss of use, data or profits, or business interruption, however caused and on any theory of contract, warranty, tort (including negligence), product liability or otherwise, arising in any way in relation to the Documentation, modified Documentation and/or the use, manufacture or distribution of a Product, even if advised of the possibility of such damages, and the Licensee shall hold the Licensor(s) free and harmless from any liability, costs, damages, fees and expenses, including claims by third parties, in relation to such use.

6. General

6.1. Except for the rights explicitly granted hereunder, this Licence does not imply or represent any transfer or assignment of intellectual property rights to the Licensee.

6.2. The Licensee shall not use or make reference to any of the names (including acronyms and abbreviations), images, or logos under which the Licensor is known, save in so far as required to comply with section 3. Any such permitted use or reference shall be factual and shall in no event suggest any kind of endorsement by the Licensor or its personnel of the modified Documentation or any Product, or any kind of implication by the Licensor or its personnel in the preparation of the modified Documentation or Product.

6.3. CERN may publish updated versions of this Licence which retain the same general provisions as this version, but differ in detail so far this is required and reasonable. New versions will be published with a unique version number.

6.4. This Licence shall terminate with immediate effect, upon written notice and without involvement of a court if the Licensee fails to comply with any of its terms and conditions, or if the Licensee initiates legal action against Licensor in relation to this Licence. Section 5 shall continue to apply.

Pin Name	Pin Number	Description
+3.3V	2, 69	+3.3 volt power rail
A0..A23	40, 42, 44, 48, 50, 52, 56, 58, 60, 64, 66, 68, 63, 61, 59, 55, 53, 51, 47, 45, 43, 39, 37, 35	24-bit address bus
/MREQ	15	Memory request (active-low)
/IORQ	13	I/O request (active-low)
/RD	19	Bus read (active-low)
/WR	21	Bus write (active-low)
/INT	5	Interrupt (active-low)
/NMI	11	Non-maskable interrupt (active-low)
D0..D7	36, 34, 32, 28, 26, 24, 20, 18	8-bit data bus
RXD	12	+3.3V serial receive
TXD	16	+3.3V serial transmit
CTS	8	+3.3V serial “clear to send” handshake line
RTS	10	+3.3V serial “ready to send” handshake line
/INT2OUT	4	Mode 2 interrupt daisy-chain output (active-low)
/INT2IN	3	Mode 2 interrupt daisy-chain input (active-low)
/CS0../CS3	23, 27, 29, 31	“Chip select” lines (active-low)
/PD	67	Presence detect (active-low)
GND	1, 9, 17, 25, 33, 41, 49, 57, 65, 70, 62, 54, 46, 38, 30, 22, 14, 6	Ground

Table 1: Pin and Signal Descriptions

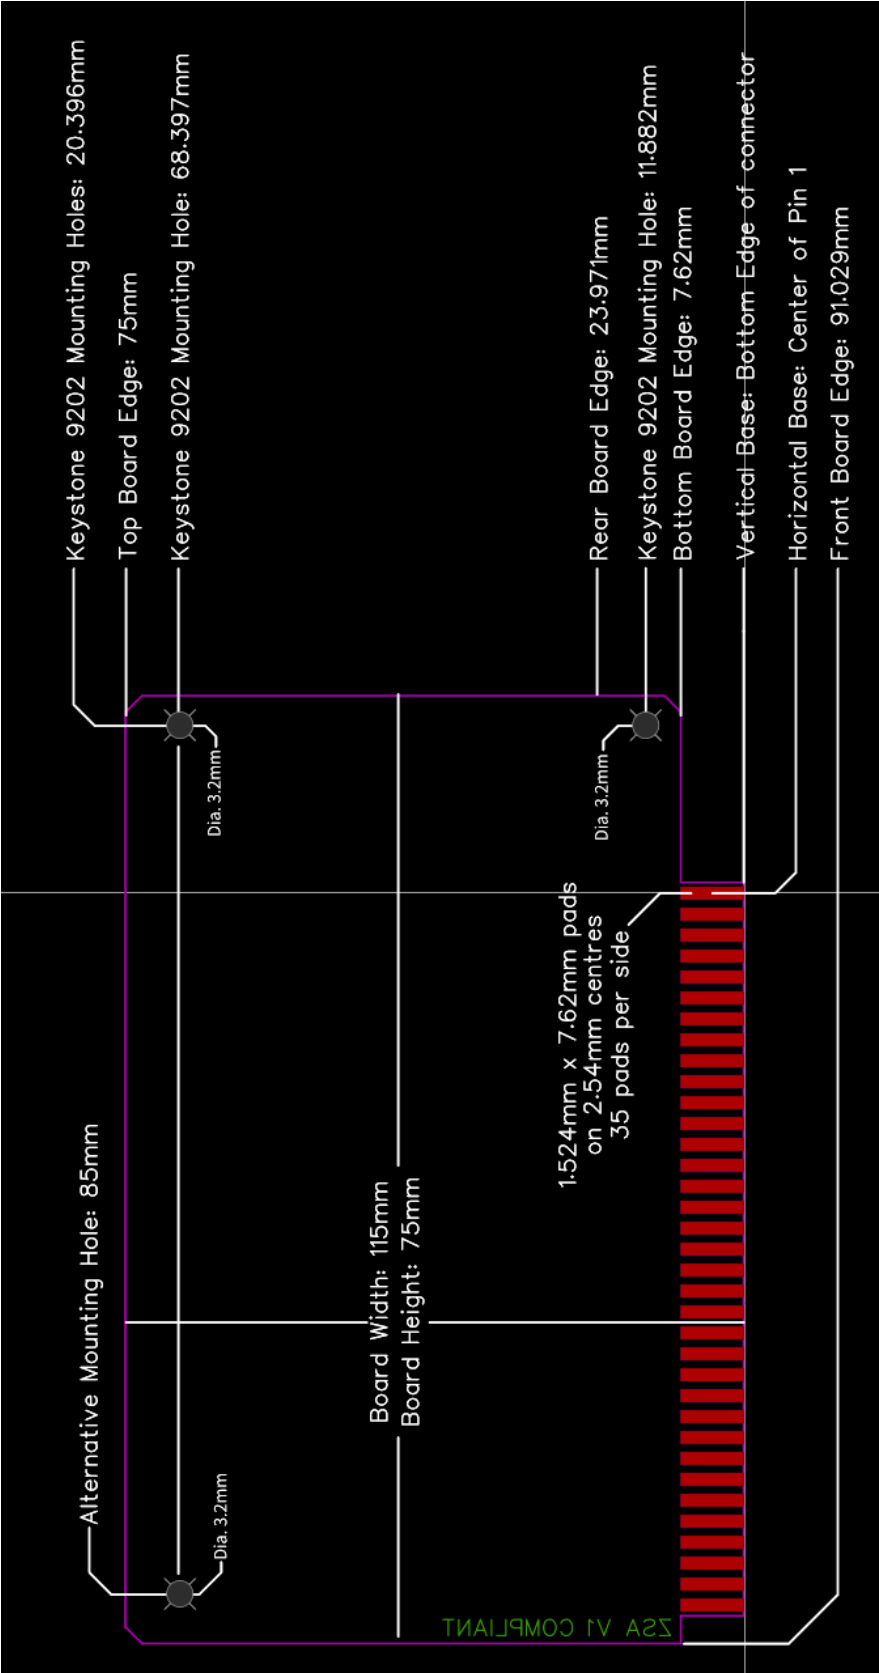


Figure 1: ZSA Expansion Card Specifications