


material code: 2005060872		REV.	DATE	REVISION	ORIGINOR	SIGN	ISSUED
		①					
		②					

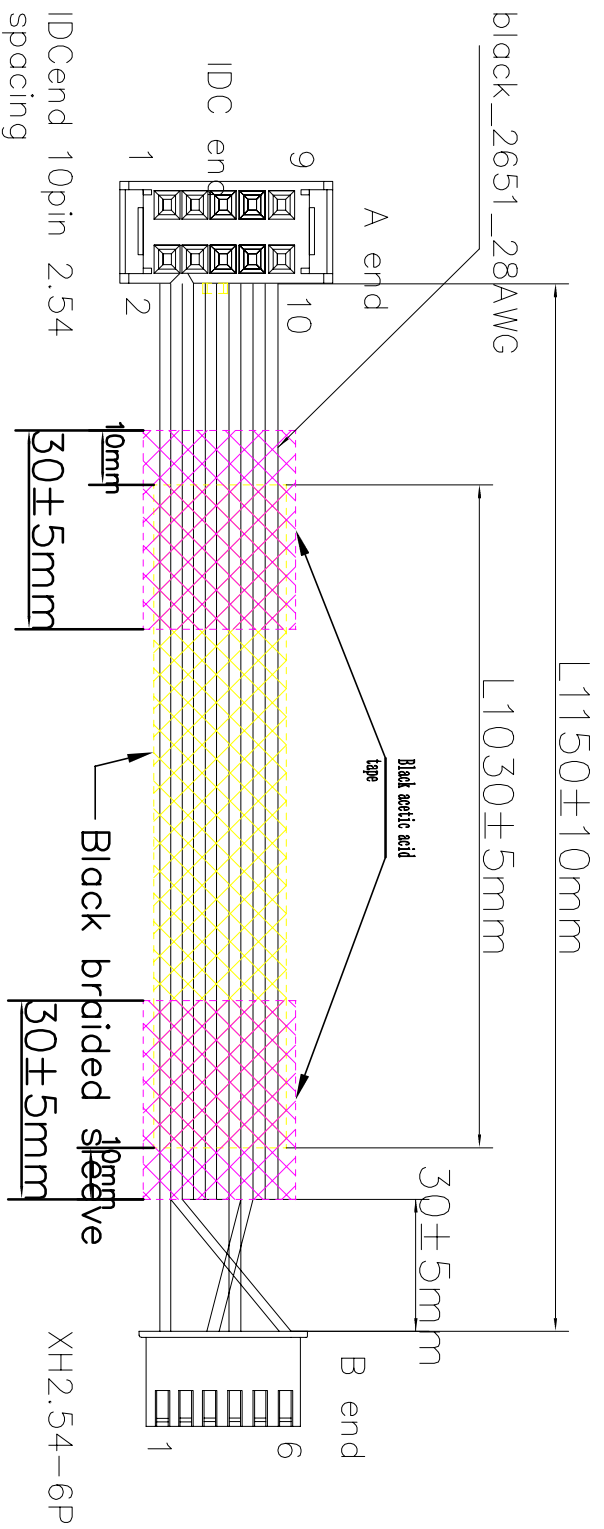

Technical requirements:

- 1.The terminal should be crimped firmly.
- 2.The wire sequence should be connected correctly, and the wire insulation should not be damaged.
- 3.Connect the wires according to the wiring diagram.

6	Heat shrinkable retardant /W-1, temperature resistance of 125℃, 10mm, black tube	2PCS
5	Sleeve Glass fiber tube, fire retardant, high temperature resistance of 260℃, 10mm, black	1PCS
4	Rubber shell XH2.54-6Y #6	1PCS
3	terminal XH2.54-T	1PCS
2	terminal IDC terminal, 2.54 spacing, 10P, black	6PCS
1	wire rod Touch different lines, black	1PCS
serial number	description	model

APPROVALS		DATE	Shenzhen jiaxinhua	
DRAWN	Wu	2022-12-27	DESIGNED	Wu
CHECKED			TOUCH	
ISSUED			SCREENING NO.	
drawing			SIZE	REV.
			UNIT: MM	A
			SHEET 1 OF 1	