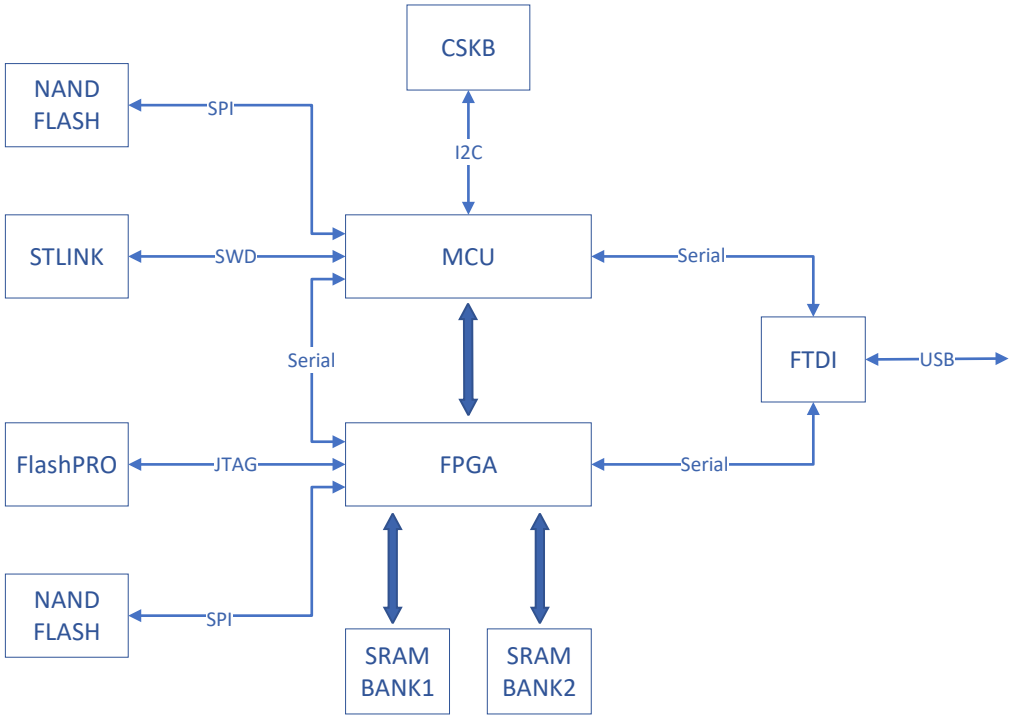
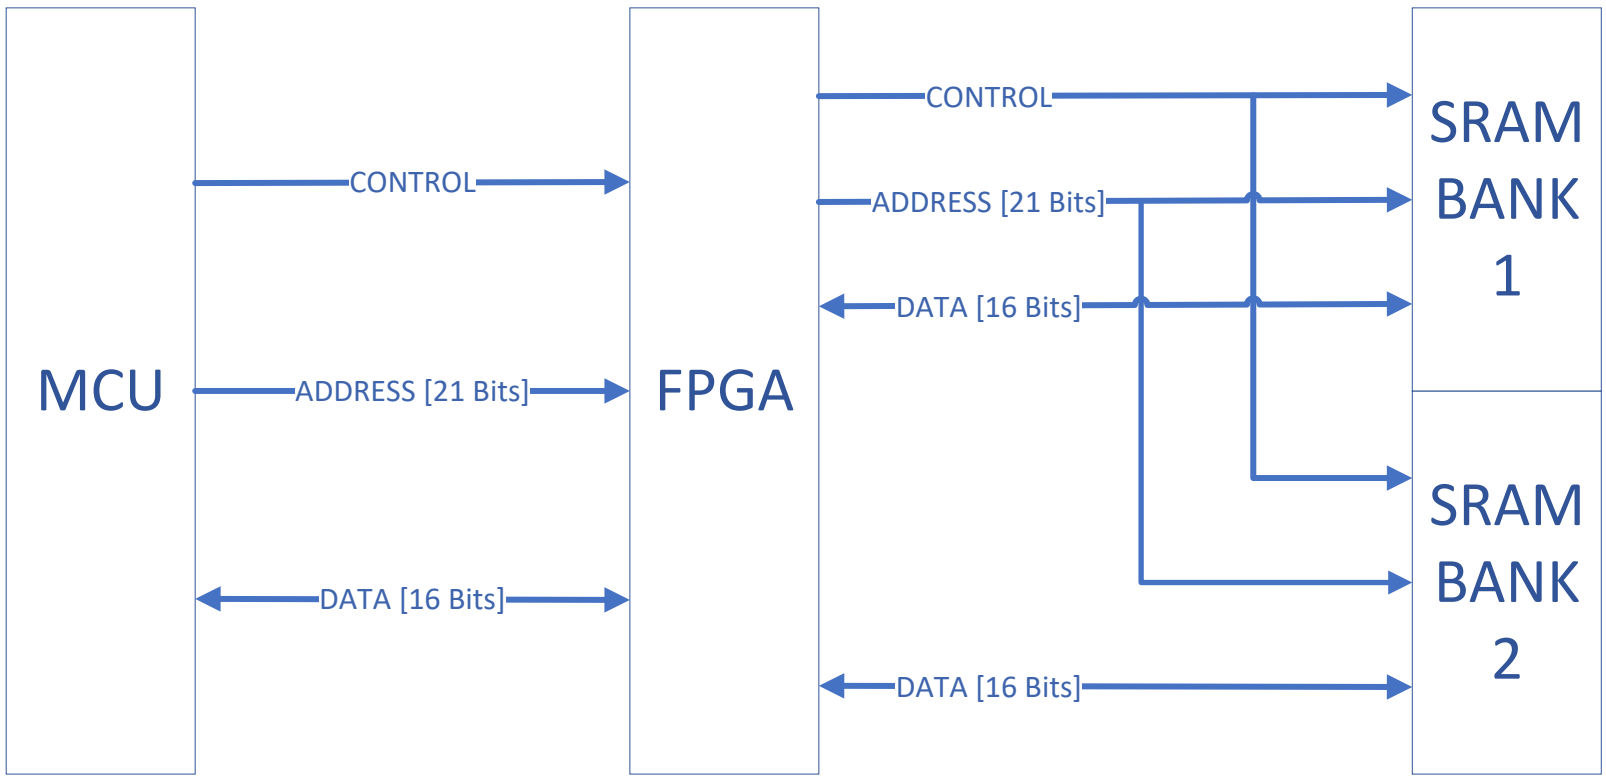
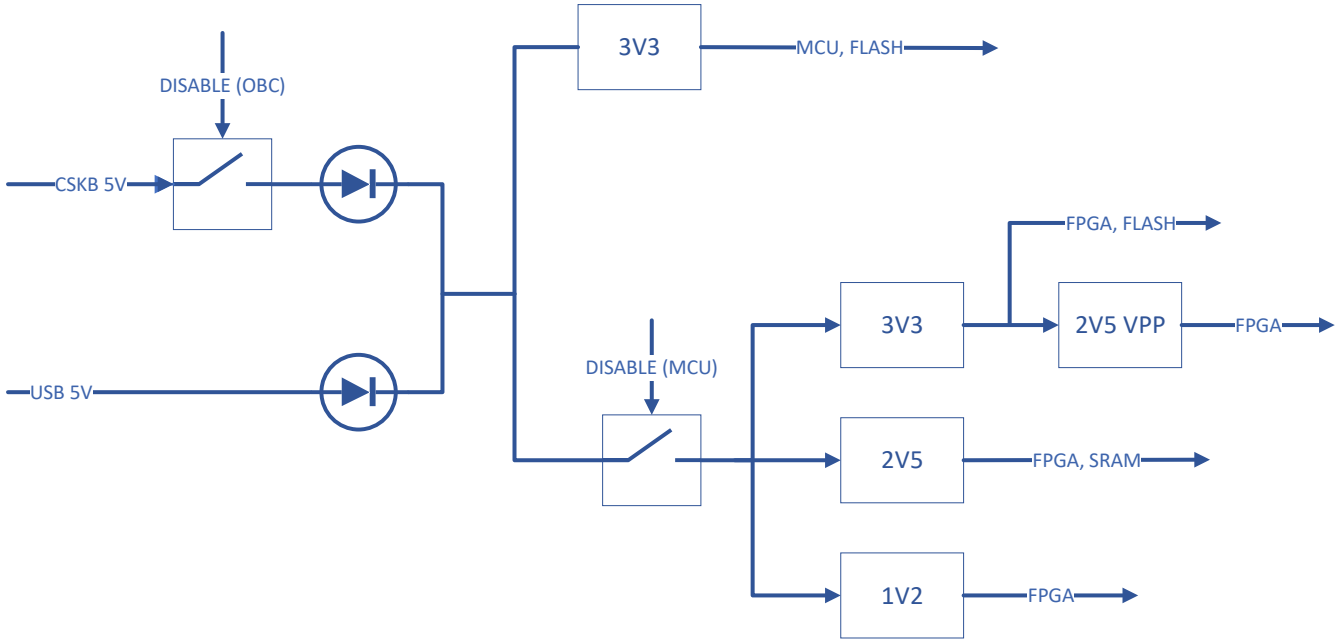
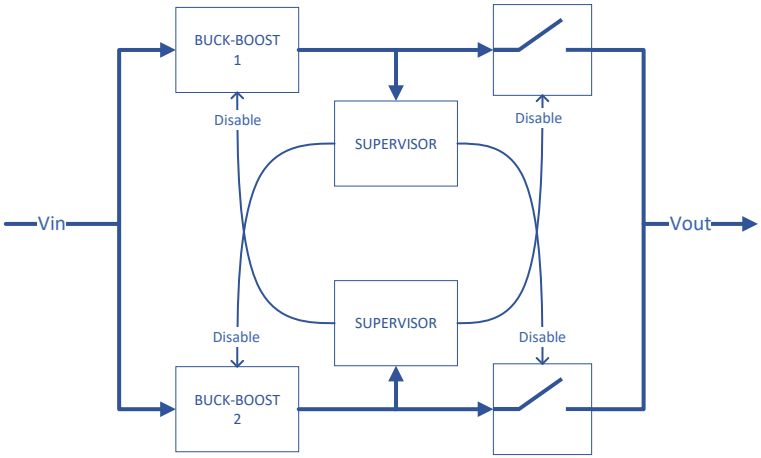
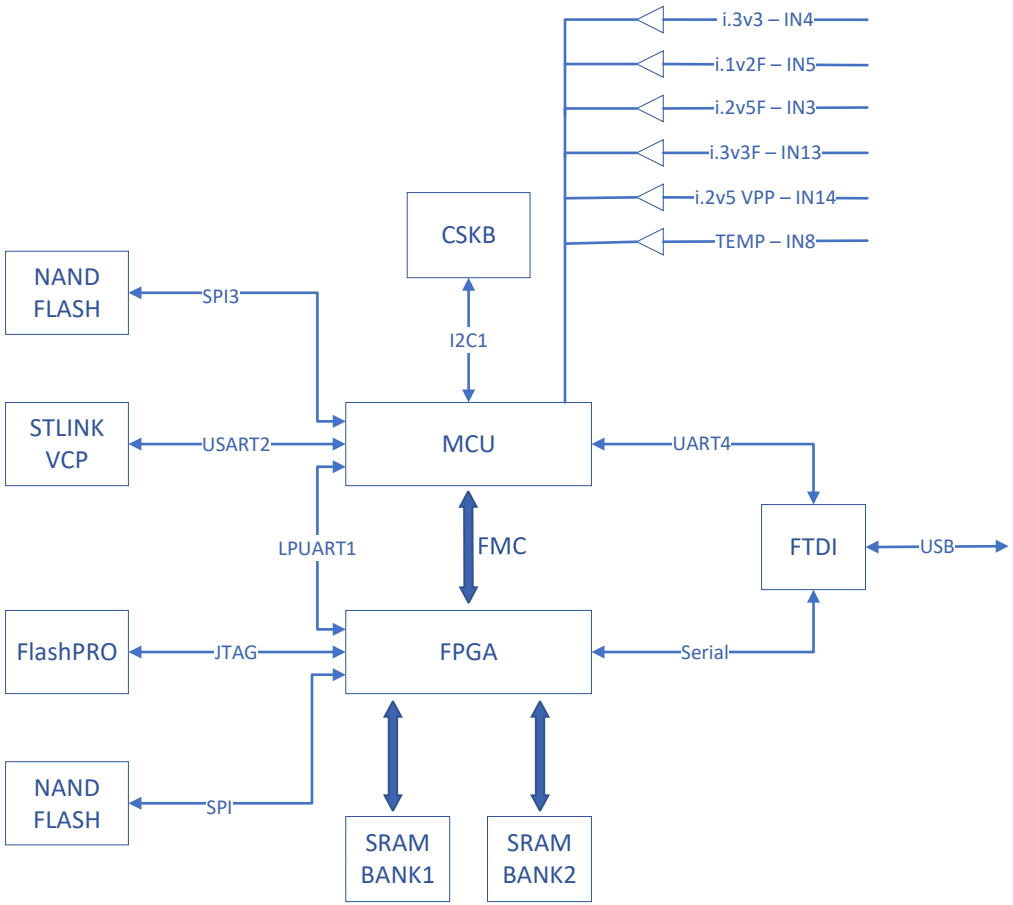

CSKB
NAND FLASH
SPI
I2C
STLINK
SWD
MCU
Serial
FTDI
USB
Serial
FlashPRO
JTAG
FPGA
Serial
NAND FLASH
SPI
SRAM BANK1
SRAM BANK2


MCU
FPGA
CONTROL
ADDRESS [21 Bits]
DATA [16 Bits]
CONTROL
ADDRESS [21 Bits]
DATA [16 Bits]
DATA [16 Bits]
SRAM BANK 1
SRAM BANK 2


DISABLE (OBC)
CSKB 5V
USB 5V
3V3
MCU, FLASH
DISABLE (MCU)
3V3
FPGA, FLASH
2V5 VPP
FPGA
2V5
FPGA, SRAM
1V2
FPGA


BUCK-BOOST
1
BUCK-BOOST
2
SUPERVISOR
SUPERVISOR
Disable
Disable
Disable
Disable
Vin
Vout


i.3v3 – IN4
i.1v2F – IN5
i.2v5F – IN3
i.3v3F – IN13
i.2v5 VPP – IN14
TEMP – IN8
CSKB
NAND FLASH
SPI3
I2C1
STLINK VCP
USART2
MCU
UART4
FTDI
USB
LPUART1
FMC
FlashPRO
JTAG
FPGA
Serial
NAND FLASH
SPI
SRAM BANK1
SRAM BANK2