



PowerWatch™



사용 설명서

시리즈 2

목차

버튼	2
초기 설정	4
전원 끄기와 공장 초기화	6
홈 화면에서 탐색하기	8
알림 읽기	9
상태 위젯	10
활동 시작	12
열전기 동력	15
배터리 충전	16
규제 지침	18
E-라벨	21

버튼

버튼 기능

⏮ 위로

위로 스크롤하여 위젯, 데이터 화면, 옵션, 설정으로 이동합니다.

⏹ 선택

옵션을 선택합니다.

⏭ 아래로

아래로 스크롤하여 위젯, 데이터 화면, 옵션, 설정으로 이동합니다.

⏪ 뒤로

이전 화면으로 돌아갑니다.



대체 버튼 기능



홈 화면에서 알림 모드를 시작합니다.



홈 화면에서 위젯 모드를 시작합니다.
메뉴에서 시계를 켜고 끕니다.



홈 화면에서 활동 모드를 시작합니다.



백라이트를 켜고 끄기 위해 3초 동안 길게 누르세요.



처음 시계를 키기 위해 7초 동안 두 버튼을 길게 누르세요.

상태 아이콘



알림



방해 금지 모드



비행기 모드 켜기/블루투스 모드 끄기



GPS 신호 세기

초기 설정

시계 켜기




[아래로] 및 [뒤로] 버튼을 7초 동안 길게 눌러 시계를 켭니다. 이는 처음에 시계를 켜는 경우에만 적용됩니다.

시계 전원을 켜면 로고 시작 화면이 표시됩니다. 出現☐動畫面時請鬆開按鍵。

시작 화면이 나타나면 버튼에서 손을 뗍니다.

스마트폰과 페어링하기

초기 설정에만 적용됩니다. 이전에 시계를 페어링한 경우 이 설정은 자동으로 건너뛰니다.



시계 전원이 켜진 후 QR 코드가 있는 화면이 표시됩니다.

스마트폰을 사용하여 QR 코드를 스캔하면 페어링 화면이 나타납니다.

전원 끄기

시계 전원은 두 가지 방법으로 끌 수 있습니다.

소프트 전원 끄기

1. [위로] 및 [아래로] 버튼을 사용하여 위젯을 스크롤해 설정 메뉴로 이동합니다.
2. [선택] 버튼을 눌러 설정 메뉴로 들어갑니다.
3. [아래로] 버튼을 사용하여 “전원 끄기” 옵션까지 스크롤합니다.
4. [선택] 버튼을 눌러 전원을 끕니다.



하드(강제) 전원 끄기


어떤 상태에서든 [아래로] 및 [뒤로] 버튼을 7초 동안 길게 눌러 시계 전원을 끌 수 있습니다.



공장 초기화

공장 초기화는 설치된 모든 앱을 제거하고, 사용자 지정 설정을 지우고, 시계를 공장 기본 설정으로 복원합니다.

1. [아래로] 버튼을 눌러 위젯을 스크롤해 설정 메뉴로 이동합니다.
2. [선택] 버튼을 눌러 설정 메뉴로 들어갑니다.
3. [아래로] 버튼을 눌러 “초기화” 옵션까지 스크롤합니다.
4. [선택] 버튼을 눌러 초기화합니다.

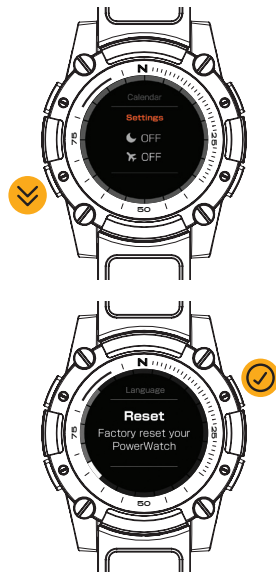

홈 화면에서 탐색하기



위로

알림 읽기

예: 메시지 또는 미리
알림에 회신.



선택

활동 시작

걷기, 달리기, 자전거
타기 등



아래로

상태 위젯

예: 걸음수, 심박수, 수면,
칼로리, 설정.



뒤로

이전 화면으로 돌아갑니다.



알림 읽기

알림 모드 시작




알림 모드를 시작하려면 [위로] 버튼을
누릅니다.



알림을 스크롤하려면 [위로] 또는 [아래로]
버튼을 누릅니다.

각 알림에 대한 조치를 취하려면 [선택]
버튼을 누릅니다.

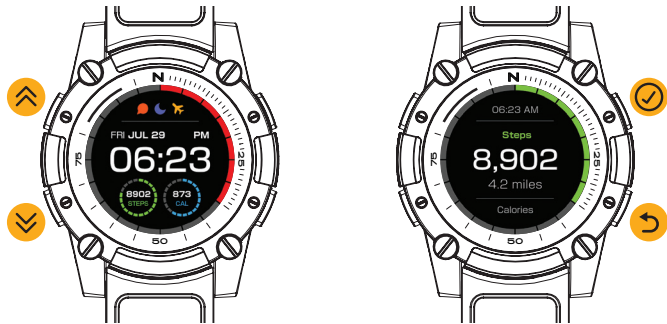

사용자 상태 확인을 시작하려면 [아래로] 버튼을 누릅니다.

위젯을 스크롤하려면 [위로] 또는 [아래로] 버튼을 누릅니다.

홈 화면으로 돌아가려면 [뒤로] 버튼을 누릅니다.

자세한 통계를 확인하려면 [선택] 버튼을 누릅니다.



시간



걸음수



칼로리



심박수



수면 추적기



설정

활동 시작

활동 모드 시작 및 선택



활동 모드를 시작하고 종료하려면 [선택] 버튼을 누릅니다.



활동 모드를 스크롤하려면 [위로] 또는 [아래로] 버튼을 누릅니다.



활동을 시작하려면 [선택] 버튼을 누릅니다.

활동 모드 내 설정



활동을 시작하고 일시 중지하려면 [선택] 버튼을 누릅니다.



이전 모드로 돌아가려면 [뒤로] 버튼을 누릅니다.



매개 변수를 스크롤하려면 [위로] 또는 [아래로] 버튼을 누릅니다.



이전 화면으로 돌아가려면 [뒤로] 버튼을 누릅니다.

PowerWatch의 내장 배터리를 충전하려면 주위 공기와 온도 차이가 있어야 합니다. PowerWatch는 공기 온도가 더 차가울 때와 몸을 움직여 피부 온도가 올라갈 때 더 많은 동력을 발생시킵니다. 아래 도표는 기온차에 따른 PowerWatch의 내장 배터리 충전 속도를 보여줍니다.

PowerWatch는 걷거나 달리면서 몸을 움직일 때, 그리고 주위 온도가 26°C(80°F) 미만일 때 가장 빠르게 배터리를 충전합니다. 32°C(90°F) 이상의 온도에서 PowerWatch는 내장 배터리를 충전할 수 없습니다.

	기온		
	60°	70°	80°
앉기	빠르게	느리게	없음
걷기	매우 빠르게	빠르게	느리게
달리기	매우 빠르게	매우 빠르게	빠르게

배터리 충전



PowerWatch 는 열 충전 패드를 백업 솔루션으로 제공합니다. 충전 패드 사용법:

1. 충전 패드를 평평한 표면에 올려 놓습니다.
2. 충전 패드를 전원 어댑터에 꽂습니다.
3. 어댑터를 전원 콘센트에 연결합니다. 。
4. 무선 충전 패드에는 제대로 놓으면 시계에 자동으로 맞춰지는 자석이 들어 있습니다.。

LED 표시등

항색으로 3회 점멸	초기화 중
단색의 녹색	충전 중
단색의 황색	완충
적색으로 점멸	충전 안 됨

주의: PowerWatch에서 승인된 충전기, 배터리 및 케이블만 사용하십시오. 승인되지 않은 충전기나 케이블은 손상이나 배터리 폭발을 초래할 수 있습니다.

제공된 무선 충전 거치대와 충전기를 사용하십시오. PowerWatch는 타사 충전기로는 제대로 충전할 수 없습니다.

충전기를 잘못 연결하면 장치에 심각한 손상을 줄 수 있습니다. 오용에 의한 손상은 보증 범위에 포함되지 않습니다.

GPS 및 배터리 수명

GPS는 하루에 30분 동안만 사용해야 합니다. 그러지 않으면 서서히 배터리가 고갈됩니다.

배터리는 사용하지 않은 날의 GPS 시간(분)만큼 저장하여 다른 날로 이월할 수 있습니다. (예: 하루동안 GPS를 전혀 사용하지 않았다면 다음 날 최대 1시간 동안 사용 할 수 있습니다.)

태양열

태양전지는 직사광선을 이용하면 어두운 실내 조명보다 최대 1,000배 많은 동력을 발생시킵니다.

REGULATORY STATEMENTS

US

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.



- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CANADA

IC STATEMENT

Model Name/Product Market Name: PowerWatch Series 2

This device complies with Industry Canada license-exempt RSS standard(s): Operation is subject to the following Two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Nom du modèle / Nom du produit du marché:

PowerWatch Series 2

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CHINA

- Manufacturer's name: Matrix Industries Inc.
- Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- Model Name/Product Market Name: PowerWatch Series 2

智能手表

型号: PowerWatch Series 2

CMIT ID:

Matrix Industries 公司

EU

1. Safety

- Product Type: Short range device
- Software version: PowerWatch 2 Android App v3.00.00; PowerWatch 2 IOS App v3.00.00
- Number of equipment and key component in the DOC is 2: PowerWatch Series 2 and TC03 (Wireless Thermal Charger)
- Rated Voltage: 3.85V DC, Battery Type: Lithium-ion Polymer (3.85V, 350mAh)
- Model Name/Product Market Name: PowerWatch Series 2
- Made in China
- Operation Temperature: -10°C to 45°C max
- 20 ATM
- Manufacturer's name: Matrix Industries Inc.
- Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- Importer Name: Matrix Industries Inc. Address is: Nijverheidsweg 27, 3274 KJ Heinenoord 0186-612267,

The Netherlands .VAT number is NL825573026B01.

2. RF & EMC

CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING



CE-RED Requirement

- Accessory: wireless charging pad model name: TC03. Operation freq.: 150KHz. Operation power: 2.5W. Operation voltage: 5V
Maximum transmit power of WPT is -5dBuA/m@10m.
- Frequency band(s) = 2402-2480MHz
- Maximum radio frequency power transmitted in the frequency band(s) = 4dBm or 2.5mW
- Declaration of Conformity Inserts:
Hereby, Matrix Industries Inc, declares that the radio equipment type [designation of type of radio equipment] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.powerwatch.com/declaration.pdf
- This equipment may be operated in:

BE	BG	CZ	DK	DE	EE	IE	EL	ES	FR
HR	IT	CY	LV	LT	LU	HU	MT	NL	AT
PL	PT	RO	SI	SK	FI	SE	UK		

TAIWAN

- Manufacturer's name: Matrix Industries Inc.
- Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- Model Name/Product Market Name: PowerWatch

Series 2

低功率電波輻射性電機管理辦法

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Low power radio wave radiating motor management method.

Article 12

A low-power RF motor that has passed the type approval shall not change the frequency, increase the power or change the original design features and functions without permission.

Article 14

The use of low-power RF motors shall not affect flight safety and interfere with legal communications; if interference is found, it shall be immediately deactivated and improved until no interference is required. Legal communication in the preceding paragraph refers to radio communication operating in accordance with the provisions of the Telecommunications Act. Low-power RF motors must withstand interference from legitimate communications or radiological electrical equipment for industrial, scientific, and medical use.

JAPAN



INDONESIA

RUSSIA



VIETNAM



THAILAND

“This telecom device and equipment is conformed to requirement to NTC”

“เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กทช.”

MALAYSIA

PHILIPPINES

INDIA

E-라벨

E-라벨 화면을 보려면 장치에서 설정 메뉴로 이동하십시오.

