
## 01 DEFAULT LAYOUT

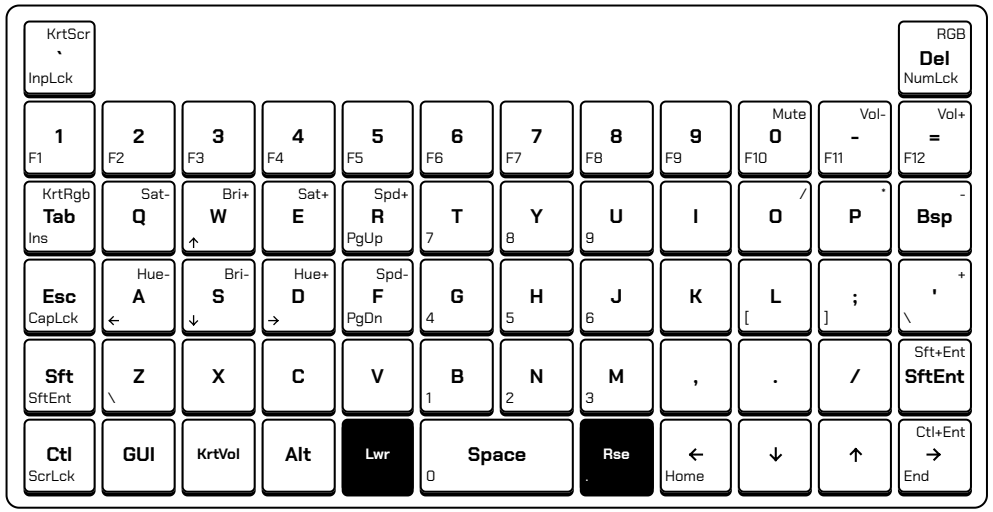


### ALIASES

| LABEL | KEY | ACTION |
|---|---|---|
| **SftEnt** | Space cadet enter | Tap for Enter, hold for Shift |
| **InpLck** | Input lock | Disables typing (for cleaning and switch testing) |

### KRT KEYCODES

| KEY | PRESS | SHIFT + PRESS | CTRL + PRESS |
|---|---|---|---|
| **KrtScr** | Next OLED screen | Previous screen | Default screen |
| **KrtRgb** | Next RGB effect | Previous effect | Default effect |
| **KrtVol** | Volume down | Volume up | Mute |

### SYSTEM SHORTCUTS

| SHORTCUT | ACTION |
|---|---|
| LShift + RShift + B | Trigger bootloader mode for flashing new firmware |
| LShift + RShift + C | Factory reset, wipes your VIA keymap back to default |



Krteq

## 02 CONNECT TO VIA

VIA allows you to easily change the keyboard layout or settings. Follow the steps below to complete the VIA interface setup.

**[1]** Get **krteq_via.json** from **github.com/swift502/Krteq/production**

**[2]** Visit **usevia.app**

**[3]** In the **Settings** tab, enable **Show Design tab**

**[4]** In the **Design** tab, click **Load** and select the JSON file

**[5]** In the **Configure** tab, click **Authorize device** and select Krteq

## 03 CUSTOMIZATION

Add more interactive OLED screens or customize the built-in behaviors by compiling your own QMK user keymap!

Advanced documentation and examples are available in the GitHub repository's README.

