


HOW WE MEASURED

five gates • three experiments • and where they do not hold

ENTRY ×1.5 rungs • clean = loss ≤ 0.5% on 3-rep medians • ±1 rung is the resolution

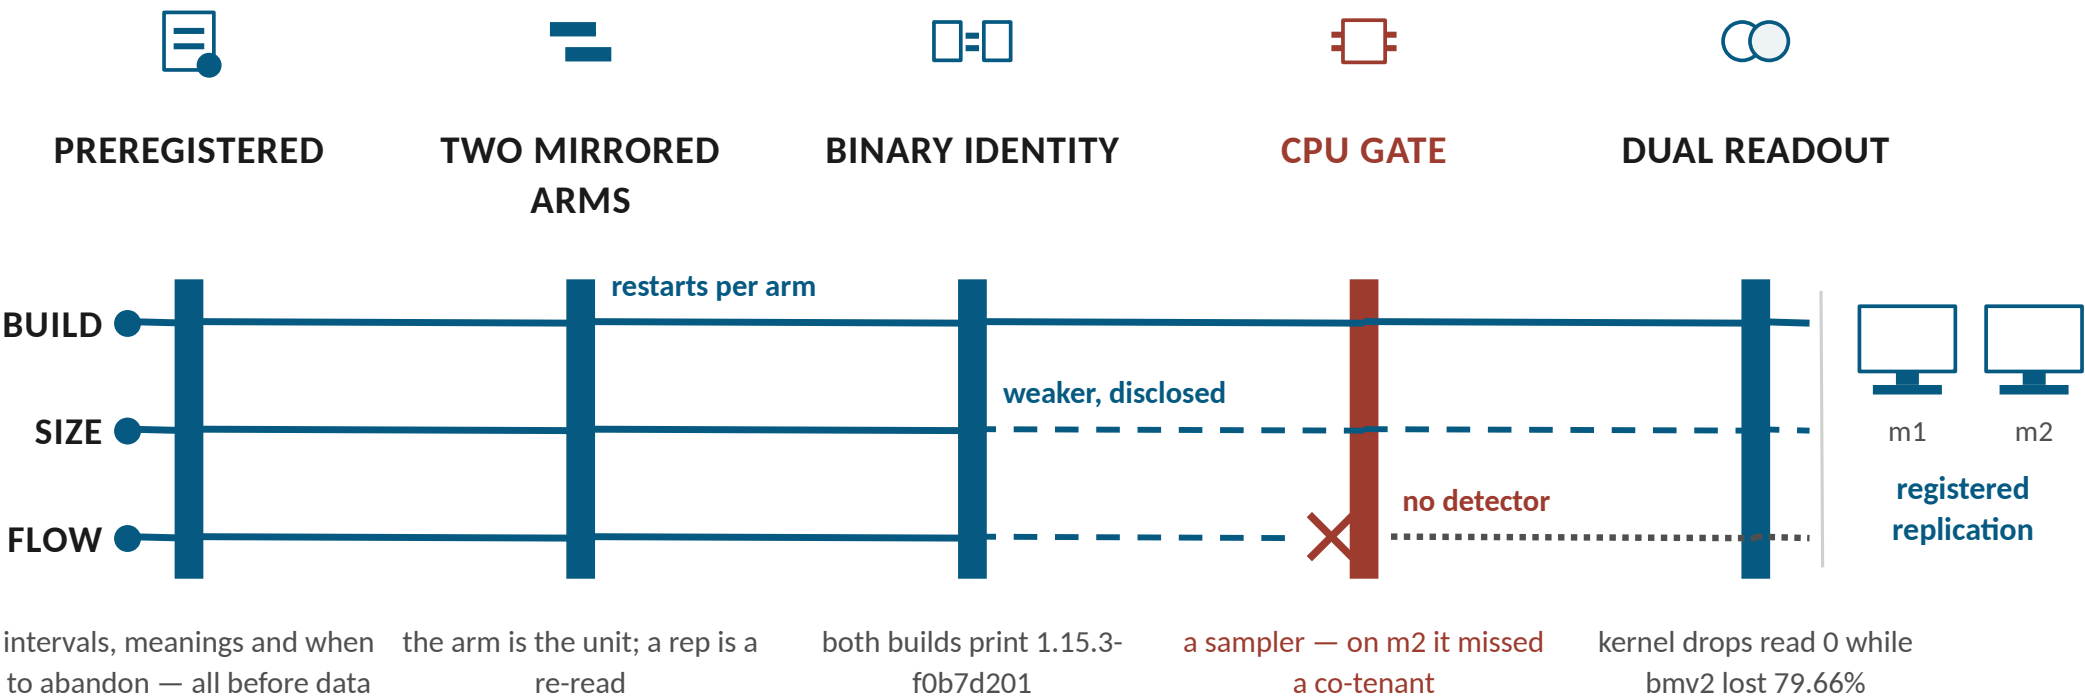

Not “we were rigorous” — this is the shape of it, and where it breaks.

Transcribed from paper/abstract §“Three preregistered measurements”. Solid = as registered • dashed = weaker, disclosed • broken = the gate did not exist for that experiment.

WHERE IT DOES NOT HOLD

three crossings we did not make cleanly

BINARY IDENTITY

the build experiment checks a bidirectional symbol signature per arm against a negative control • size and flow read the binary off the process command line

WHY THAT MATTERS

it is how we know both builds print the same version string, 1.15.3-f0b7d201 — the check that caught us out is the one worth keeping

NO DETECTOR

the flow experiment predates the CPU gate entirely and is reported with no foreign-load detector

GATE COVERAGE

on m2 the gate was a pre-run snapshot • it missed a co-tenant, and we found that from the tenant's own ledger, not from the gate

WHICH WAY IT CUT

foreign load can only slow an arm, so the contaminated reading was the flattering one

A gate is a sampler, so we report its coverage — not its presence.

paper/abstract §“Three preregistered measurements” and the second-machine paragraph. Every line here is already in the written record; none of it is new to this deck.