Digital communication (ECE-303)

TEST-1

DATE: 20-10-2021

Q.no 1.

Binary data 1 1 0 1 1 0 0 0 1 1

→ Polar Quaternary → 00 → 3A/2 10 → A/2
01 → -A/2 11 → -3A/2

→ Differential Manchester 0 → ⌐ 1 → ⌙ Inverse

→ HDB N line code waveform

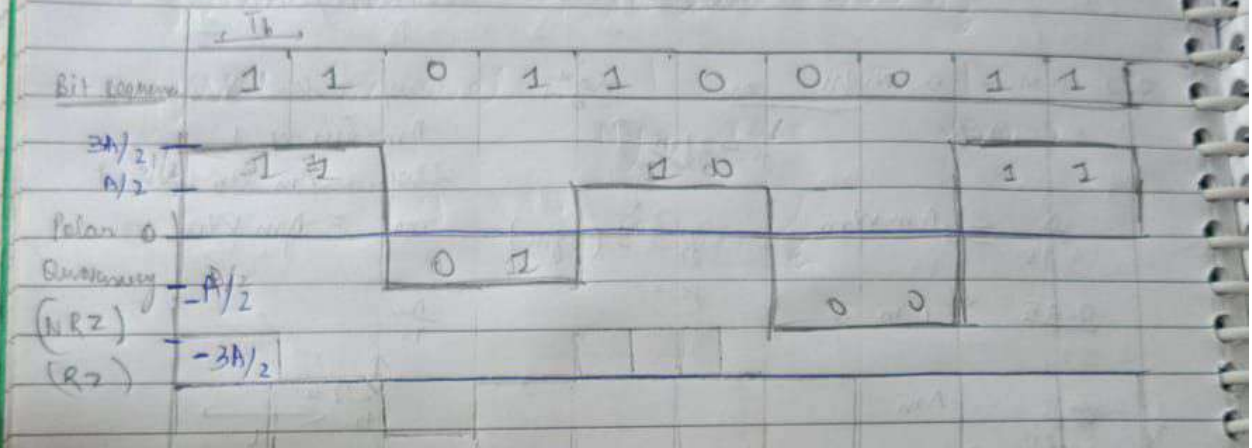

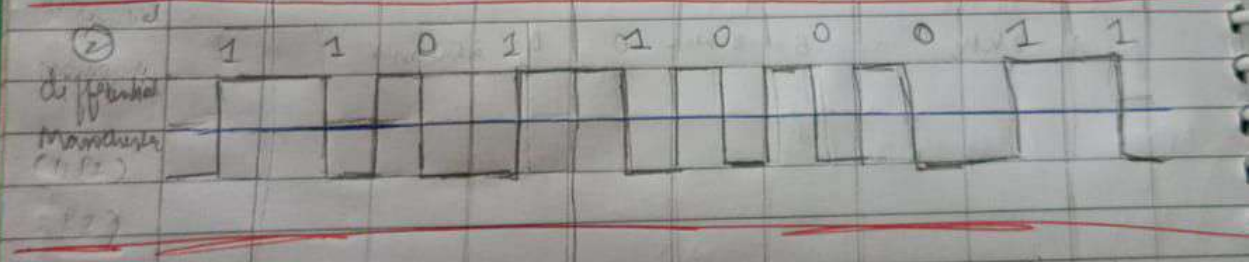

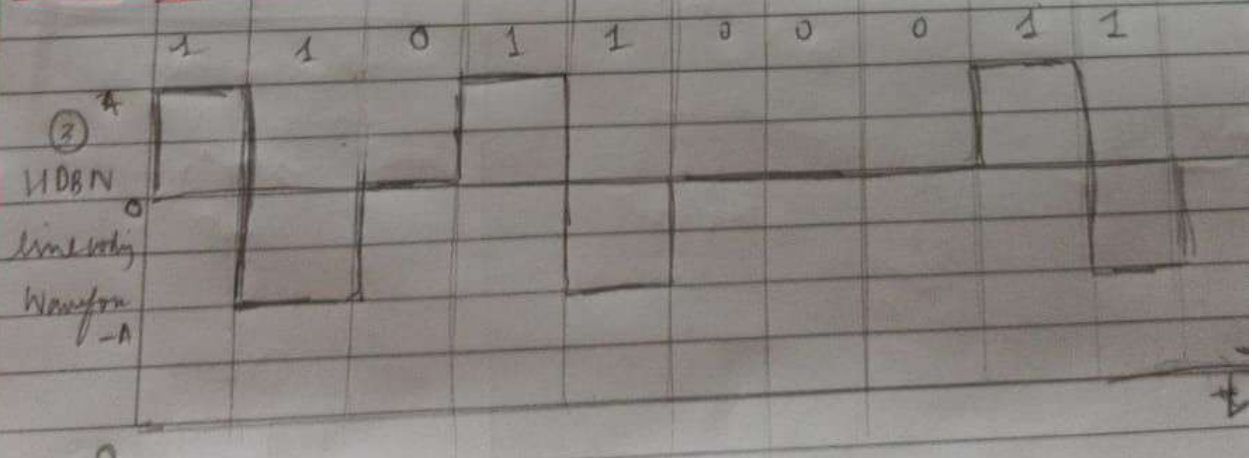

DATE : .....

Ans 2.

Manchester, Bipolar, Polar Quaternary

DISADVANTAGES

Bipolar

→ No clock signal is present for use.
→ long string of binary data with continuous 1's and 0's cause loss of synchronization

MANCHESTER

→ The fact that a manchester encoded signal required that more bits be transmitted than there is the original signal.

POLAR QUATENARY

→ Greater complexity than polar NRZ-L or Polar NRZ-I
→ Required twice as much bandwidth than polar NRZ-L or polar NRZ-I

Bipolar < Polar Quaternary < Manchester

[order of line coding techniques as per increasing bandwidth]

DATE : .....

Ans 3. $g(t) = 1000 \sin(2500\pi t)$

$W = 2500\pi$ rad/sec

$\therefore f = \frac{W}{2\pi} = 1250$ Hz

Nyquist rate $= 2 \times f_{max} = 2500$ Hz

Nyquist interval $= \frac{1}{\text{Nyq. rate}} = \frac{1}{2500}$

$= 4 \times 10^{-4}$ ms

Ans 4.

differential manchester

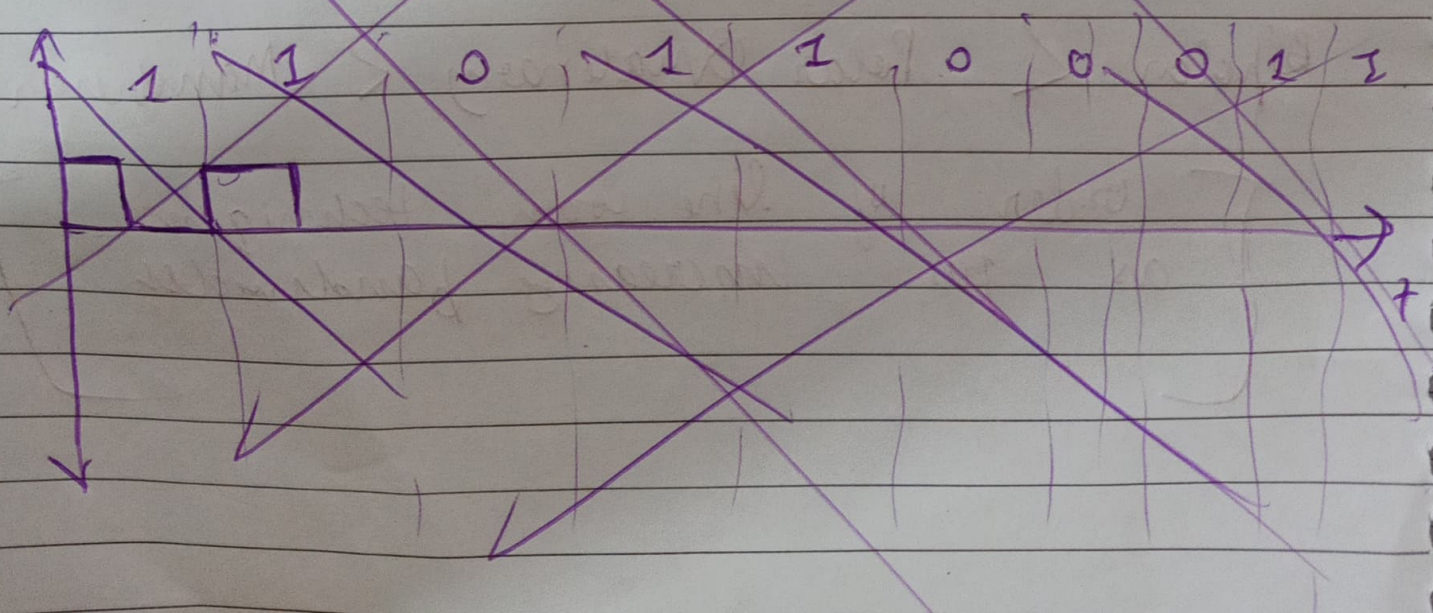

DATE : .....

Ans 4. **REGENERATIVE REPEATER**

for any communication system to be reliable it should transmit and receive signal effectively, without any loss.

A PCM wave after transmitting through a channel gets distorted due to noise introduced by the channel.

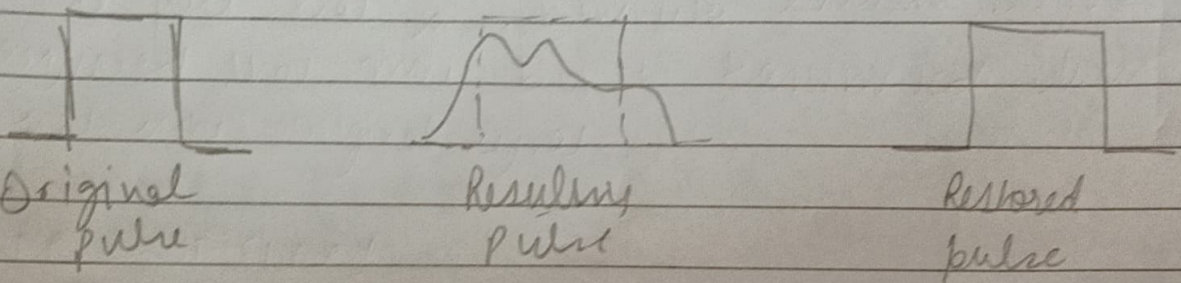

for better reproduction of signal circuit is called as regenerative repeater and is employed in path before receiver.
This helps in restoring the signal from losses occured

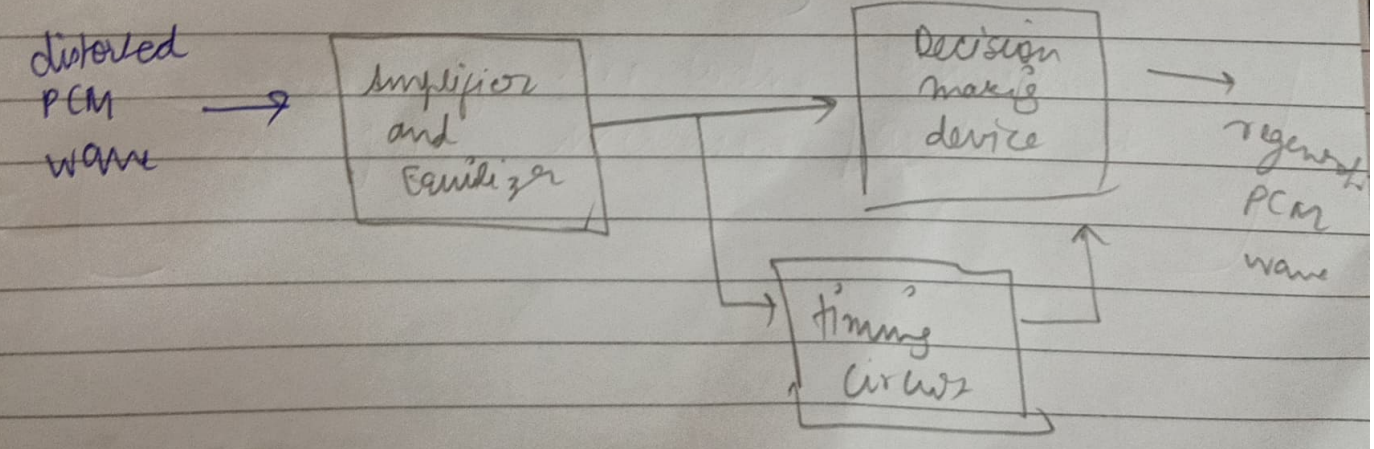

DATE : .....

Ans 6. $g(t) = 10 \sin(200\pi t)$

a) $(SNR)_{dB} = 6.02n + 1.76$

n = bits quantization

$n = 10$

$(SNR)_{dB} = 6.02 \times 10 + 1.76$

$= 60.2 + 1.76$

$= 61.96 \text{ dB}$ Ans

b) $SNR = (1.8 + 6n) \times B$

$40 = 1.8 + 6n$

$40 - 1.8 = 6n$

$6n = 38.2$

$n = \frac{38.2}{6} = 6.366$

$n \approx 6$ Ans

DATE : .....

Ans 1.

differential manchester