

SET10108 Concurrent and Parallel Systems

Coursework 2

N-Body Simulation

Adam Blance 40161070


29 February 2004

Abstract

1 Introduction

As more and more of our world becomes heavily reliant on data found on-line, it becomes incredibly important to learn how to parallelize this data to allow data to be processed as quickly as possible. Learning how to parallelize sequential systems has become a very important skill to possess in your repertoire.

In this course-work the task was to parallelize an N-body algorithm. An N-Body algorithm is a simulation where a particle is affected by the all other particles according to the laws of physics. Issues occur when large amounts of particles are rendered on the screen. This causes any program running an N-Body simulation sequentially to struggle. This is known as the N-Body problem. In this report several parallelization techniques were used and compared.

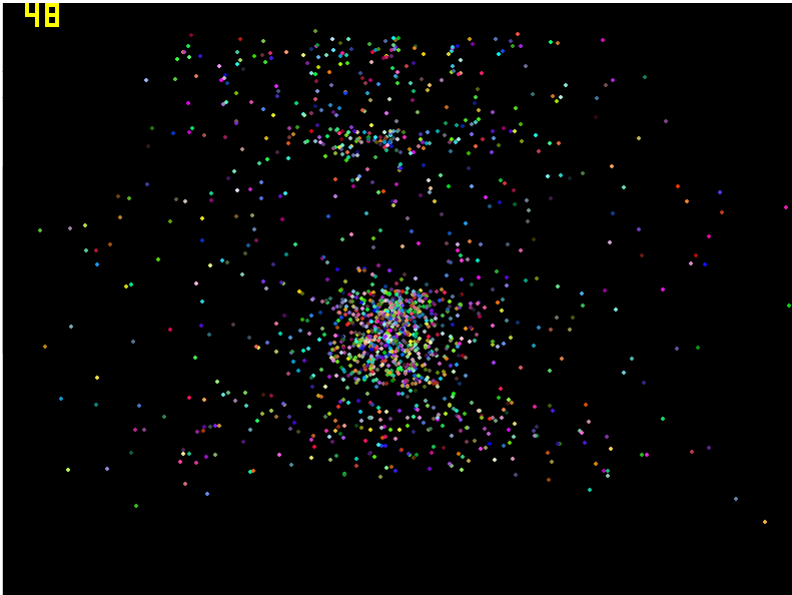

2 Initial Analysis

The first task in the course work was choosing which of the three tasks posed to us. It was decided that N-Body simulation would be the task that would be selected. The reason for deciding on N-Body simulation was because research into JPEG compression found little results and while prime numbers search was possible, N-body was chosen down to personal preference.

Once this was decided on research was conducted into N-Body simulation and which algorithm online would be used to parallelise. During the search many possible candidates were found but the best one was harrism/mini-body . The reason for this was it because of its relative simplicity allowing for graphical output to be easily added into the code. After that small tweaks were made to the N-Body simulation and using Allegro 5, a graphical interface was created. From this point the initial analysis was conducted.

2.1 First Results


It was decided that 3 things would be tested to gather the baseline data of the application to discover any bottlenecks. These were:

- Length of Simulation.

- Size of Times Step.
- Number of Particles.


These three factors were measured by the execution time, this was calculated by taking using the system clock and printed to a console, also taken was the average framerate this was measured using Fraps. The tables for the measurements are shown below.

2.1.1 Length of Simulation

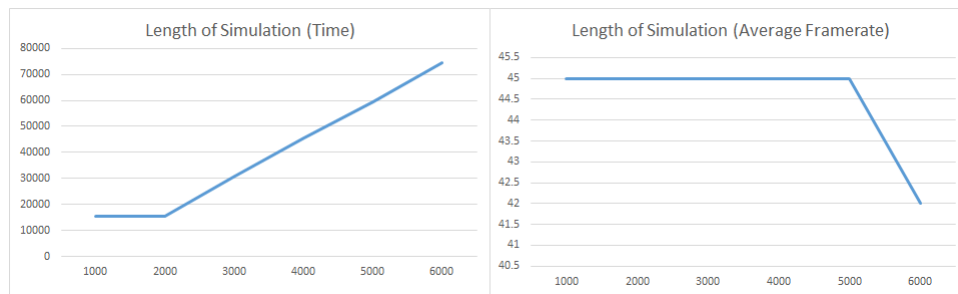


The reason for measuring the length of the simulation was to see if a drop off occurred at any point and performance suffered because of this. This was measured in number of iterations. As shown in the results no bottleneck occurred at any point as the time taken increased at steady amount as was expected and the framerate did not suffer at all. An anomaly occurred during this test. This being the framerate dropping to 42 fps rather the holding at 45 fps like the other tests this probably had nothing to do with code and with assumed to be an anomaly. The other strange occurrence in this test was that `///comeback to this /////`

2.1.2 Size of Times Step

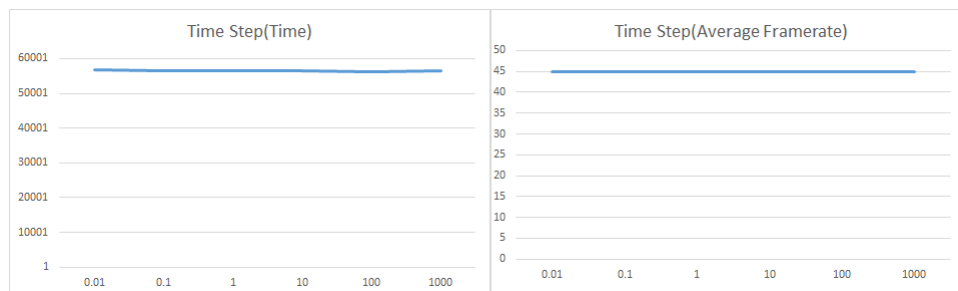

2.1.3 Number of Particles

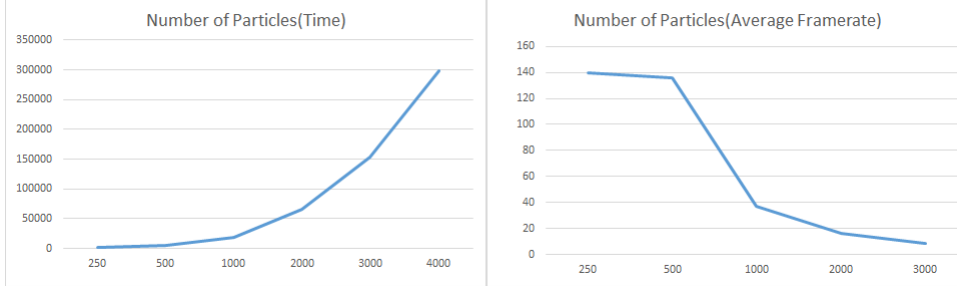

The final measurement that was taken was Number of Particles the graph show clearly that a bottleneck occurs as the number of particles increases. This is what will be tested once the code is parallelized.

3 Methodology

To solve the bottle-neck that was defined in the initial analysis several parallelization techniques were used. These were OpenMP and CUDA. The idea behind using these approaches was to be able to compare parrallelization on the GPU against parrallelization on the CPU.They would be measured by increasing the number of particles on screen and their results would be presented below.

To keep the values constant each test was run 11 times and an average value was calculated with the first value being ignored to allow the program to warm up. To evaluate these techniques two values were quantified, these being the time taken to complete the simulation and the average frame-rate. To calculate the time taken this system clock within Visual Studio was used. This was important to present in the results as it is the most common and easiest way to compare with a sequential program. To measure the Frame-rate Fraps was used. The reason for this is because in most simulations the frame-rate is more important then the time taken.

The code that will be parallelized is shown below. ///////////////put in code//////////

3.0.1 OpenMP

The first approach was to use OpenMP, OpenMP is a library to support shared memory concurrency allowing it to be portable and added easily to the program. It can be easily used in conjunction with other approaches

allowing more threading to be implemented.

3.0.2 CUDA

4 Results

5 Conclusion