



CM1-SPR
CM1-RPW
CM1-RM01A/B,
CM1-RC01A, CM1-RC10A
사용 매뉴얼



Full 매뉴얼

제품을 사용하기 전에

	주의	지시사항을 위반하였을 때, 경미한 상해나 제품 손상이 발생할 가능성이 있는 경우
	경고	지시사항을 위반하였을 때, 심각한 상해나 사망이 발생할 수 있는 경우

 주의	
1) 각 제품의 경계 전압 및 단자 배열을 확인한 후 정확하게 배선하여 주십시오. 2) 배선 시 단자의 나사는 규정 토크로 단단하게 조여 주십시오. 3) 배선 작업 중 모듈 내로 배선 찌꺼기 등의 이물질이 들어가지 않도록 하여 주십시오. 4) 모듈의 케이스로부터 PCB를 분리하거나 제품을 개조하지 마십시오. 5) PLC는 사용설명서 또는 데이터 시트의 일반 규격에 명시된 환경에서만 사용하십시오. 6) 출력모듈에 정격 이상의 부하를 연결하거나 출력 회로가 단락되지 않도록 하여 주십시오. 7) 제품 및 배터리를 폐기할 경우, 산업 폐기물로 처리하여 주십시오.	
 경고	
1) 전원이 인가된 상태에서 단자대를 만지지 마십시오. 2) 제품 안으로 금속성 이물질이 들어가지 않도록 하여 주십시오. 3) 배터리는 충전, 분해, 가열, Short, 납땜 등을 하지 마십시오.	


이 기기는 업무용 (A급)으로 전자파 적합 등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로 합니다.

사용 환경 및 사용 버전 안내


항 목	규 격	관련 규격
사용 온도	-10℃~65℃	-
보관 온도	-25℃~80℃	-
사용 습도	5~95%RH, 이슬이 맺히지 않을 것	-
보관 습도	5~95%RH, 이슬이 맺히지 않을 것	-
내 진동	단속적인 진동이 있는 경우	
	주 파수	가 속 도
	5≤f<9Hz	-
	9≤f≤150Hz	9.8m/s ² (1G)
	진 폭	3.5mm
	횟 수	X,Y,Z 각 방향 10 회
내 진동	연속적인 진동이 있는 경우	
	주 파수	가 속 도
	5≤f<9Hz	-
	9≤f≤150Hz	4.9m/s ² (0.5G)
	진 폭	1.75mm
	횟 수	X,Y,Z 각 방향 10 회

각 부 명칭 및 외형치수 (mm)


▶ CM1-SPR

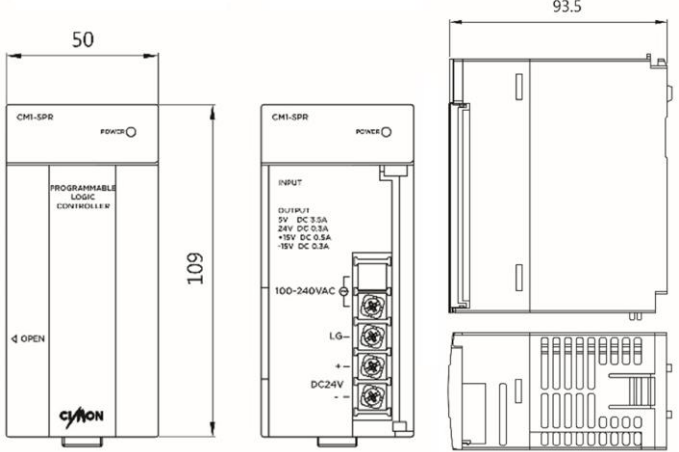

▶ CM1-RPW / CM1-RC01(A/B) / CM1-RM01(A/B)

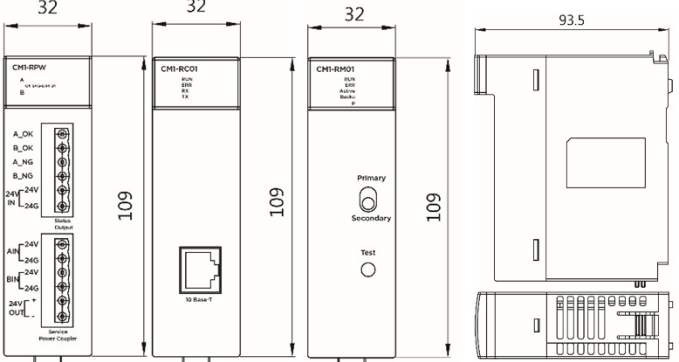

이중화전원 BASE 기본 구성

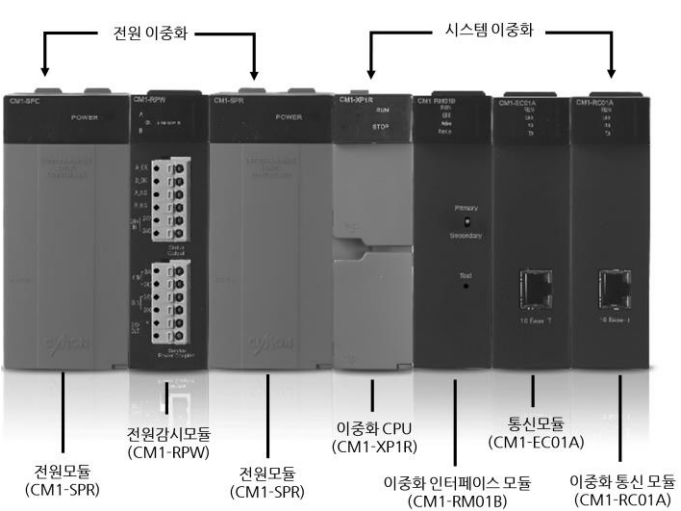

성능 규격

▶ CM1-SPR (Power Module)

항목	CM1-SPR
입력	입력전압
	AC 88~264V
	입력전류
	1.8A (110V) 0.95A (220V)
출력	돌입전류
	50A Peak
	효율
	65%
출력	허용순시정전
	10ms
	출력전압
	+24V (0.3A) +5.5V (3.5A) +15V (0.5A) -15V (0.3A)
전압상태표시	출력 전압 정상 시 LED ON

▶ CM1-RPW (Power Monitoring Module)

항목	CM1-RPW
Status Output (A_OK, B_OK, A_NG, B_NG)	출력타입
	TR Sink Type
	최대 출력 전류
	0.5A / 점
Status Output (24V IN)	정격 입력 전압
	DC 24V
	최대 입력 전류
	0.8A
Power Coupler Input (A IN / B IN)	정격 입력 전압
	DC 24V
	정격 출력 전압
	DC 24V
Power Coupler Output (24V OUT)	최대 출력 전류
	8A
동작 표시	정상 동작 시 LED ON
	포토 커퍼러 절연
	절연 방식
	포토 커퍼러 절연

▶ CM1-RC01A / CM1-RC10A (이중화 통신모듈)

항목	CM1-RC01A	CM1-RC10A
통신규격	10 BASE-T	100 BASE -TX
통신속도	10Mbps	100 Mbps
통신거리	100m	
프로토콜	CIMON 내부 이중화 프로토콜	
케이블 규격	UTP/STP Category5, 트위스티드 패어선	

▶ CM1-RM01A / CM1-RM01B (이중화 인터페이스)

항목	CM1-RM01A	CM1-RM01B
Primary/Secondary Switch	Toggle Type 2-position (UP: Primary, Down: Secondary)	
Active/Back up 절체 Switch	Push Button Switch	

※ CM1-RM01B는 사용자의 조작 실수를 줄이기 위해 Active/Back up 절체 스위치가 외부로 돌출되어 있지 않으며, Primary/Secondary 스위치 또한 소형 스위치로 제작되어 있습니다

보증 내용

본 제품은 ㈜싸이몬에서 보증하며, 고장 발생 시 아래의 규정에 의거하여 서비스를 받으실 수 있습니다.

- 하드웨어, 소프트웨어 및 펌웨어를 포함한 모든 싸이몬 제품 (이하 '제품'으로 표기)의 보증기간은 출하일로부터 20개월입니다. 이 기간에 발생된 제품 하자 또는 제조 결함에 대해 당사는 해당 제품을 교환 또는 수리하여 드립니다. 구매 후 30일 이내 반송된 제품의 경우 당사의 보증 규정에 따라 리퍼 또는 새 제품으로 교환할 수 있습니다. 수리 또는 교환된 제품에 대해서는 6개월 또는 원래 주어진 보증기간의 잔여 기간 중 더 긴 기간을 보증 적용합니다.
- 다음 경우에는 제품 보증이 적용되지 않습니다.
 - 천재지변 또는 당사 출하 시 과학, 기술 수준에서 예상이 불가능한 원인에 의한 고장 및 손상
 - 미허가 인력에 의한 제품 개봉, 수리, 변경, 개조 등의 경우
 - 설령서 미준수 등, 사용자의 과실로 인한 제품 고장 또는 손상 (제조일자, 일련번호 포함)

고객 서비스 정보

- 회사명: ㈜싸이몬 CIMON CO.,Ltd
- 홈페이지: www.cimon.co.kr
- A/S: 경기도 용인시 수지구 포은대로 59번길 40 (상현동 1187) 시그니처광고 2차 지식산업센터 805호
- 전화: 1899-1891
- 팩스: 031-216-4789
- 담당: 품질보증팀 팀장
- 이메일: cs@cimon.com



Before you start

	Caution	Caution describes situations that may cause minor injury or damage to the device.
	Warning	Warning describes situations that could cause major or fatal injury to the user.


	Caution
1) Make sure to check the device's rated voltage and circuit arrangement before wiring. 2) Make sure to tighten the screws with standard torque. 3) When wiring, make sure that wiring debris does not enter the module. 4) Do not dissociate the PCB from the module's casing or modify the device. 5) Use the PLC in an environment that meets the general specifications given in this manual. 6) A greater than normal current passed through the PLC for an extended period of time, or a short-circuited load flowing through the output module may cause a fire. 7) When the product is disposed of, it should be done according to your country's regulations for similar types of industrial waste.	
	Warning
1) Please do not touch the terminals when the power is on. 2) Make sure that metal debris do not enter the PLC. 3) Do not charge, disassemble, heat up, short or solder the battery.	

General Specifications


Items	Specification			Standards	
Operating Temp.	-10℃-65℃			-	
Storage Temp.	-25℃-80℃			-	
Operating Humidity	5-95% RH, Non-condensing			-	
Storage Humidity	5-95% RH, Non-condensing			-	
Vibration Protection	For discontinuous vibration				IEC 61131-2
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	3.5 mm	10 times in X,Y,Z	
	9≤f≤150 Hz	9.8m/s²(1G)	-		
	Continuous vibration				
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	1.75 mm	10 times in X,Y,Z	
	9≤f≤150 Hz	4.9m/s²[0.5G]	-		

Appearance and Dimensions (mm)


► CM1-SPR

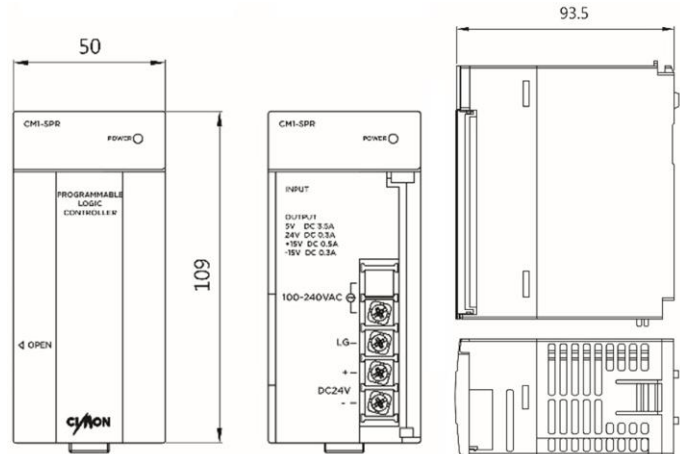

► CM1-RPW / CM1-RC01(A/B) / CM1-RM01(A/B)

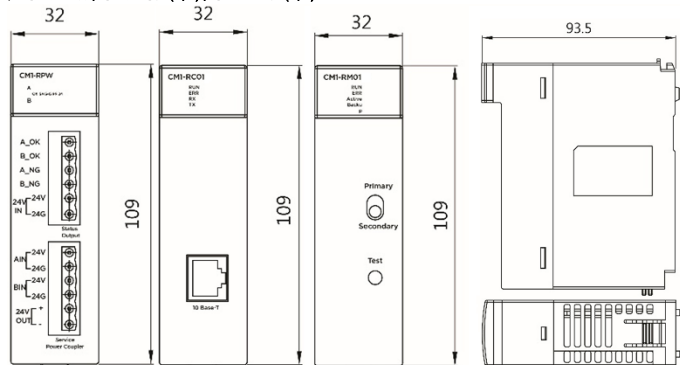

Power Redundancy Configuration

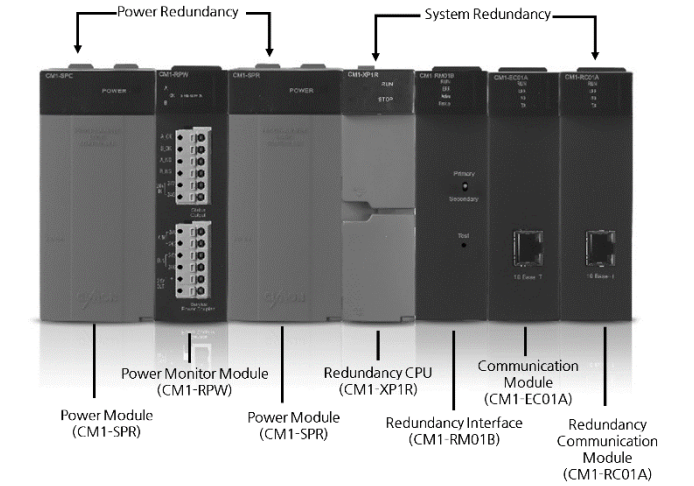

Performance Specification

► CM1-SPR (Power Module)

Item	CM1-SPR
Input	Rated Voltage 88~264 VAC
	Current 1.8 A (110 V) 0.95 A (220 V)
	Inrush current 50 A Peak
	Efficiency 65%
	Permissible instantaneous power failure time 10 ms
Output	Voltage (Current) +24 V (0.3 A) +5.5V (3.5 A) +15 V (0.5 A) -15 V (0.3 A)
	Operation Indication LED is ON when output voltage is normal.

► CM1-RPW (Power Monitoring Module)

Item	CM1-RPW
Status Output (A_OK, B_OK, A_NG, B_NG)	Output Type TR Sink Type
	Max. Output Current 0.5 A / Point
Status Output (24V IN)	Rated Input Voltage 24 VDC
	Max. Input Current 0.8 A
Power Coupler Input (A IN / B IN)	Rated Input Voltage 24 VDC
	Rated Input Current 8 A
Power Coupler Output (24 V OUT)	Rated Input Voltage 24 VDC
	Max. Input Current 8 A
Isolation Type Photocoupler isolation	
Operation Indication LED is ON when the operation is normal.	

► CM1-RC01A / CM1-RC10A (Redundancy Communication Modules)

Item	CM1-RC01A	CM1-RC10A
Interface	10 BASE-T	100 BASE -TX
Data Transmit Speed	10 Mbps	100 Mbps
Max. Distance	100 m	
Protocol	CIMON Redundancy Protocol	
Cable Standard	UTP/STP Category5, Twisted pair cable	

► CM1-RM01A / CM1-RM01B (Redundancy Interface Modules)

Item	CM1-RM01A	CM1-RM01B
Primary/Secondary Switch	Toggle Type 2-position (UP: Primary, Down: Secondary)	
Active/Back up Switching Switch	Push Button Switch	

※ The Active/Back up switching switch of CM1-RM01B module does not protrude externally to reduce user error. The Primary/Secondary switch is also made up of small switches.

Product Warranty

All CIMON products, including hardware, software, and firmware (collectively called "Products"), carry a **three-year warranty** against defects in materials and workmanship beginning from the date of product shipment from CIMON to its appointed distributor.

YOUR USE OF ANY CIMON PRODUCTS AND CONTENT ACCESSIBLE THROUGH THE PRODUCTS IS ENTIRELY AT YOUR OWN RISK. CIMON, ITS AFFILIATES, AND SUPPLIERS DO NOT WARRANT THAT THE PRODUCTS ARE SECURE AND FREE FROM BUGS, VIRUSES, INTERRUPTION, ERRORS, THEFT, OR DESTRUCTION. THE PARTIES FURTHER AGREE THAT THE APPLICABLE LAW AND VENUE FOR ANY DISPUTE ARE THE LAWS OF NEVADA. TO THE EXTENT ALLOWED BY APPLICABLE LAW, ANY CLAIMS SHALL BE BROUGHT IN HENDERSON, NEVADA, AND NEVADA LAW SHALL APPLY.

CIMON CO., LTD

Korea Address:

#805 Office Bld., Signature Gwang-gyo2, 40, Poeun-daero 59beon-gil, Suji-gu, Yongin-si, Gyeonggi-do, Republic of Korea, 16864
Tel. +82-31-780-1039

USA Address:

CIMON Inc. 2435 W. Horizon Ridge Pkwy, #100, Henderson, NV 89052
Tel. +1-702-820-1060
Homepage : www.cimon.com