

1. 각 모듈의 밑에 있는 Din Rail Lock을 당겨 Lock을 풉니다.
2. PLC-S의 밑부분을 들어 Din Rail로부터 제거합니다.
3. PLC-S CPU 위 아래에 있는 확장 Lock을 밑쪽 소리가 날 때까지 당겨줍니다.
4. 확장 모듈을 제거합니다.

- 회사명: ㈜싸이몬 CIMON CO.,Ltd
- 홈페이지: www.cimon.co.kr
- 본사: 경기도 용인시 수지구 포은대로59번길 37 시그니차광교1차 지하2층 B213호
- 전화: 1899-1891
- 팩스: 031-216-4789
- 담당: 품질보증팀 팀장
- 이메일: cs@cimon.com



Before you start



Caution

Caution describes situations that may cause minor injury or damage to the device.



Warning

Warning describes situations that could cause major or fatal injury to the user.



Caution

- 1) Make sure to check the device's rated voltage and circuit arrangement before wiring.
- 2) Make sure to tighten the screws with standard torque.
- 4) Do not dissociate the PCB from the module's casing or make any modifications to the device.
- 5) Use the PLC in an environment that meets the general specifications given in this manual.
- 6) A greater than normal current passed through the PLC for an extended period of time, or a short-circuited load flowing through the output module may cause a fire.
- 7) When the product is disposed of, it should be done according to your country's regulations for similar types of industrial waste.
- 8) Make sure to check the device's rated voltage and circuit arrangement before wiring. Failure to do so may cause electric shock or damage to the device.
- 9) Select a cable considering ambient temperature and allowable current AWG 22 (0.3 mm²) or more is recommended.
- 10) If the wiring is too close to a heat-generating device or directly contacted with oil for long periods of time it may cause a short circuit, breakdown or malfunction.
- 11) Do not bundle the input/output signal or communication cables with the main circuit and power cables. They should be installed at least more than 100 mm (3.94 inches) apart.



Warning

- 1) Please do not touch the terminals when the power is on.
- 2) When wiring, make sure that wiring debris does not enter the module.
- 3) Do not charge, disassemble, heat up, short, or solder the battery.


General Specifications

Items	Specification	Standards			
Operating Temp.	-10℃-60℃	-			
Storage Temp.	-25℃-80℃	-			
Operating Humidity	5-95%RH, Non-condensing	-			
Storage Humidity	5-95%RH, Non-condensing	-			
Vibration	For discontinuous vibration			IEC 61131-2	
	Frequency	Acceleration	Amplitude		Times
	5≤f<9Hz	-	3.5mm		10 times in X,Y,Z
	9≤f≤150Hz	9.8m/s ² [1G]	-		
	Continuous vibration				
	Frequency	Acceleration	Amplitude		Times
	5≤f<9Hz	-	1.75mm		10 times in X,Y,Z
	9≤f≤150Hz	4.9m/s ² [0.5G]	-		

Following version is recommended for the system configuration.

- PLC-S CPU: FW V6.19
- CIMON Software: V8.10

Part Names and Dimensions (mm)

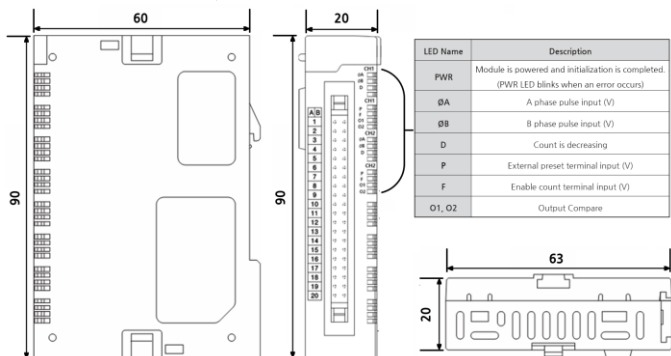


Module Replacement

1. To unlock the module, pull Din Rail Locks positioned underside of each module.
2. Lift bottom of the PLC-S to remove the module from Din Rail
3. Pull extended locks positioned at the top and bottom of PLC-S until you hear the click sound.
4. Remove the extended module.

Specifications

Item	CM3-SP02HSC	CM3-SP02HSD
I/O Points	16 points	
Number of Channels	2 channels	
Power consumption	90 mA	105 mA
Weight	68.5g	71.2g
Count Input Signal	Phase	1 Phase input/2 Phase input
	Level (φA, φB)	5/12/24 V DC 2~5 mA / RS-422A Line Drive (5 V) / HTL Line Drive (24 V)
	Types	PNP Encoder (-Common) / Line Drive (Differential Input)
Count	Speed	200 kpps / RS-422A Line Driver: 500 kpps / HTL Line Driver: 250 kpps
	Range	32-bit signed binary values (-2147483648~2147483647)
	Mode	Up/Down Preset Counter + Ring Counter
	Min. Count Pulse Period (μs) (Duty ratio 50%)	
Compared Output	Compared range	32-bit signed binary values
	Comparison	Compared value < Present value / Compared value = Present value / Compared value > Present value
External Input	Preset	5/12/24 V DC 2~5 mA
	Enable Count	
External Output	Output Compare	TR (SINK Type) Output 12~24 V

Operation Concept

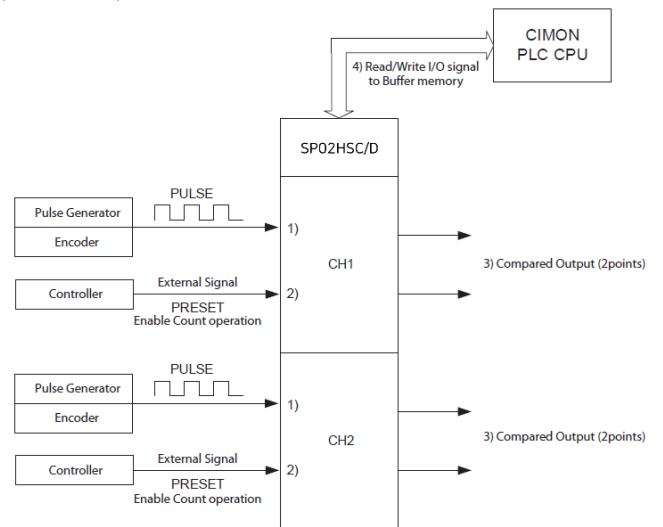

Product Warranty

All CIMON products including hardware, software, and firmware (collectively called "Products") carry a **three-year warranty** against defects in materials and workmanship beginning from the date of product shipment from CIMON to its appointed distributor. YOUR USE OF ANY CIMON PRODUCTS AND CONTENT ACCESSIBLE THROUGH THE PRODUCTS IS ENTIRELY AT YOUR OWN RISK. CIMON AND ITS AFFILIATES AND SUPPLIERS DO NOT WARRANT THAT THE PRODUCTS ARE SECURE, FREE FROM BUGS, VIRUSES, INTERRUPTION, ERRORS, THEFT OR DESTRUCTION. THE PARTIES FURTHER AGREE THAT THE APPLICABLE LAW AND VENUE FOR ANY DISPUTED ARE THE LAWS OF NEVADA. TO THE EXTENT ALLOWED BY APPLICABLE LAW, ANY CLAIMS SHALL BE BROUGHT IN HENDERSON, NEVADA AND NEVADA LAW SHALL APPLY

CIMON CO., LTD

Korea Address:

#1008 Office Bld., Signature Gwang-gyo
37, Poen-daero 59beon-gil, Sujigu, Yongsin-si, Gyeonggi-do, Republic of Korea 16864
Tel. +82-31-780-1039

USA Address:

CIMON Inc. 2435 W. Horizon Ridge Pkwy, #100, Henderson, NV 89052
Tel. +1-702-820-1060

Homepage: www.cimon.com