

## 1. Description


### 1.1. Project

Project Name	RobotSTV2
Board Name	NUCLEO-F767ZI
Generated with:	STM32CubeMX 4.27.0
Date	11/24/2018

### 1.2. MCU

MCU Series	STM32F7
MCU Line	STM32F7x7
MCU name	STM32F767ZITx
MCU Package	LQFP144
MCU Pin number	144

## 2. Pinout Configuration

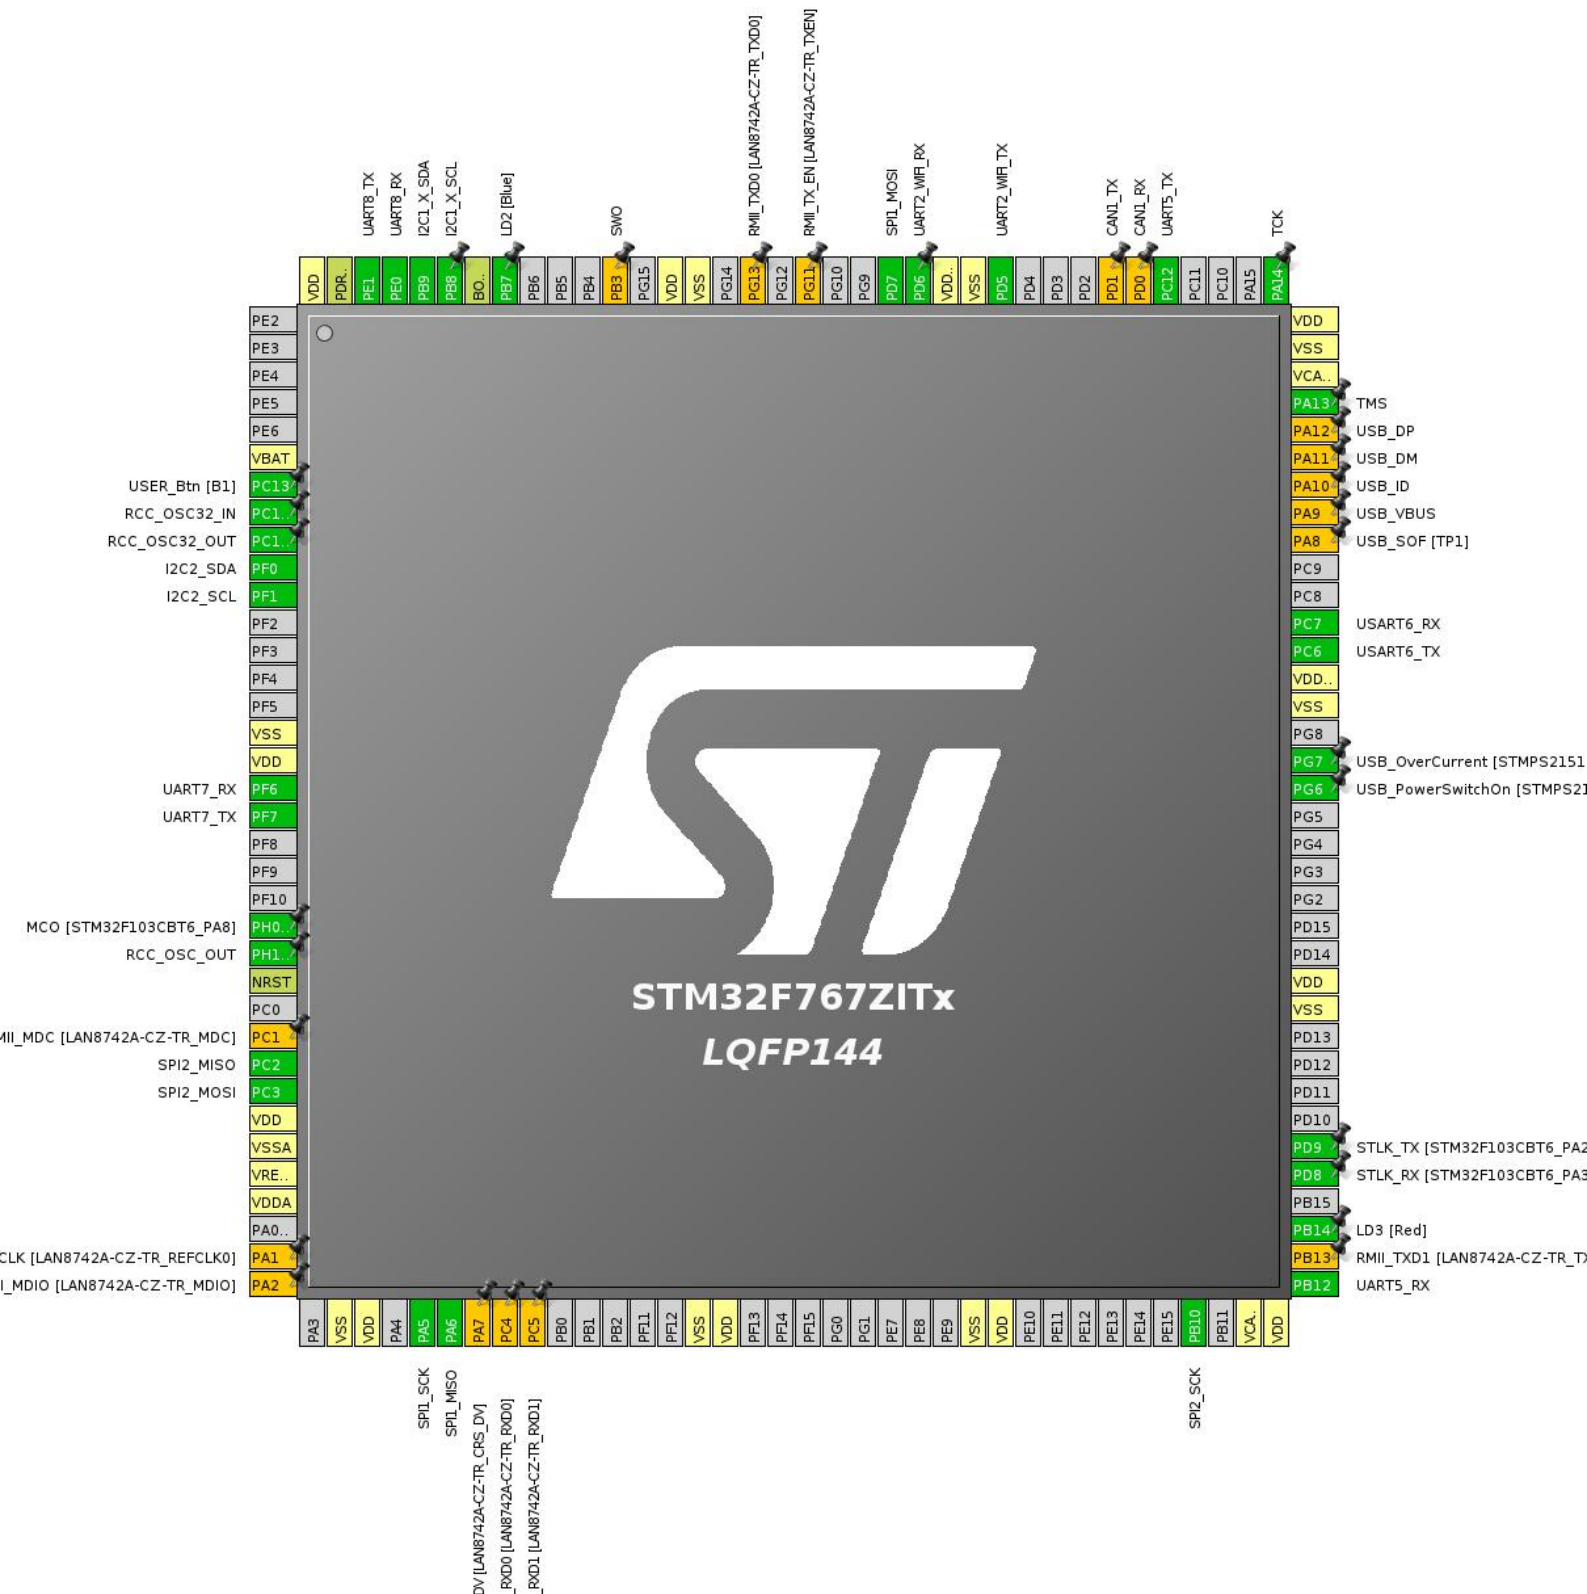

### 3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13	I/O	GPIO_EXTI13	USER_Btn [B1]
8	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15/OSC32_OUT	I/O	RCC_OSC32_OUT	
10	PF0	I/O	I2C2_SDA	
11	PF1	I/O	I2C2_SCL	
16	VSS	Power		
17	VDD	Power		
18	PF6	I/O	UART7_RX	
19	PF7	I/O	UART7_TX	
23	PH0/OSC_IN	I/O	RCC_OSC_IN	MCO [STM32F103CBT6_PA8]
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
27	PC1 *	I/O	ETH_MDC	RMII_MDC [LAN8742A-CZ- TR_MDC]
28	PC2	I/O	SPI2_MISO	
29	PC3	I/O	SPI2_MOSI	
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
35	PA1 *	I/O	ETH_REF_CLK	RMII_REF_CLK [LAN8742A-CZ- TR_REFCLK0]
36	PA2 *	I/O	ETH_MDIO	RMII_MDIO [LAN8742A-CZ- TR_MDIO]
38	VSS	Power		
39	VDD	Power		
41	PA5	I/O	SPI1_SCK	
42	PA6	I/O	SPI1_MISO	
43	PA7 *	I/O	ETH_CRS_DV	RMII_CRS_DV [LAN8742A- CZ-TR_CRS_DV]
44	PC4 *	I/O	ETH_RXD0	RMII_RXD0 [LAN8742A-CZ- TR_RXD0]
45	PC5 *	I/O	ETH_RXD1	RMII_RXD1 [LAN8742A-CZ- TR_RXD1]


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
69	PB10	I/O	SPI2_SCK	
71	VCAP_1	Power		
72	VDD	Power		
73	PB12	I/O	UART5_RX	
74	PB13 *	I/O	ETH_TXD1	RMII_TXD1 [LAN8742A-CZ- TR_TXD1]
75	PB14 **	I/O	GPIO_Output	LD3 [Red]
77	PD8	I/O	USART3_TX	STLK_RX [STM32F103CBT6_PA3]
78	PD9	I/O	USART3_RX	STLK_TX [STM32F103CBT6_PA2]
83	VSS	Power		
84	VDD	Power		
91	PG6 **	I/O	GPIO_Output	USB_PowerSwitchOn [STMPS2151STR_EN]
92	PG7 **	I/O	GPIO_Input	USB_OverCurrent [STMPS2151STR_FAULT]
94	VSS	Power		
95	VDDUSB	Power		
96	PC6	I/O	USART6_TX	
97	PC7	I/O	USART6_RX	
100	PA8 *	I/O	USB_OTG_FS_SOF	USB_SOF [TP1]
101	PA9 *	I/O	USB_OTG_FS_VBUS	USB_VBUS
102	PA10 *	I/O	USB_OTG_FS_ID	USB_ID
103	PA11 *	I/O	USB_OTG_FS_DM	USB_DM
104	PA12 *	I/O	USB_OTG_FS_DP	USB_DP
105	PA13	I/O	SYS_JTMS-SWDIO	TMS
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	TCK
113	PC12	I/O	UART5_TX	
114	PD0 *	I/O	CAN1_RX	
115	PD1 *	I/O	CAN1_TX	
119	PD5	I/O	USART2_TX	UART2_WIFI_TX
120	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
121	VDDSDMMC	Power		
122	PD6	I/O	USART2_RX	UART2_WIFI_RX
123	PD7	I/O	SPI1_MOSI	
126	PG11 *	I/O	ETH_TX_EN	RMII_TX_EN [LAN8742A-CZ-TR_TXEN]
128	PG13 *	I/O	ETH_TXD0	RMII_TXD0 [LAN8742A-CZ-TR_TXD0]
130	VSS	Power		
131	VDD	Power		
133	PB3 *	I/O	SYS_JTDO-SWO	SWO
137	PB7 **	I/O	GPIO_Output	LD2 [Blue]
138	BOOT0	Boot		
139	PB8	I/O	I2C1_SCL	I2C1_X_SCL
140	PB9	I/O	I2C1_SDA	I2C1_X_SDA
141	PE0	I/O	UART8_RX	
142	PE1	I/O	UART8_TX	
143	PDR_ON	Reset		
144	VDD	Power		

\*\* The pin is affected with an I/O function

\* The pin is affected with a peripheral function but no peripheral mode is activated

## 4. Clock Tree Configuration

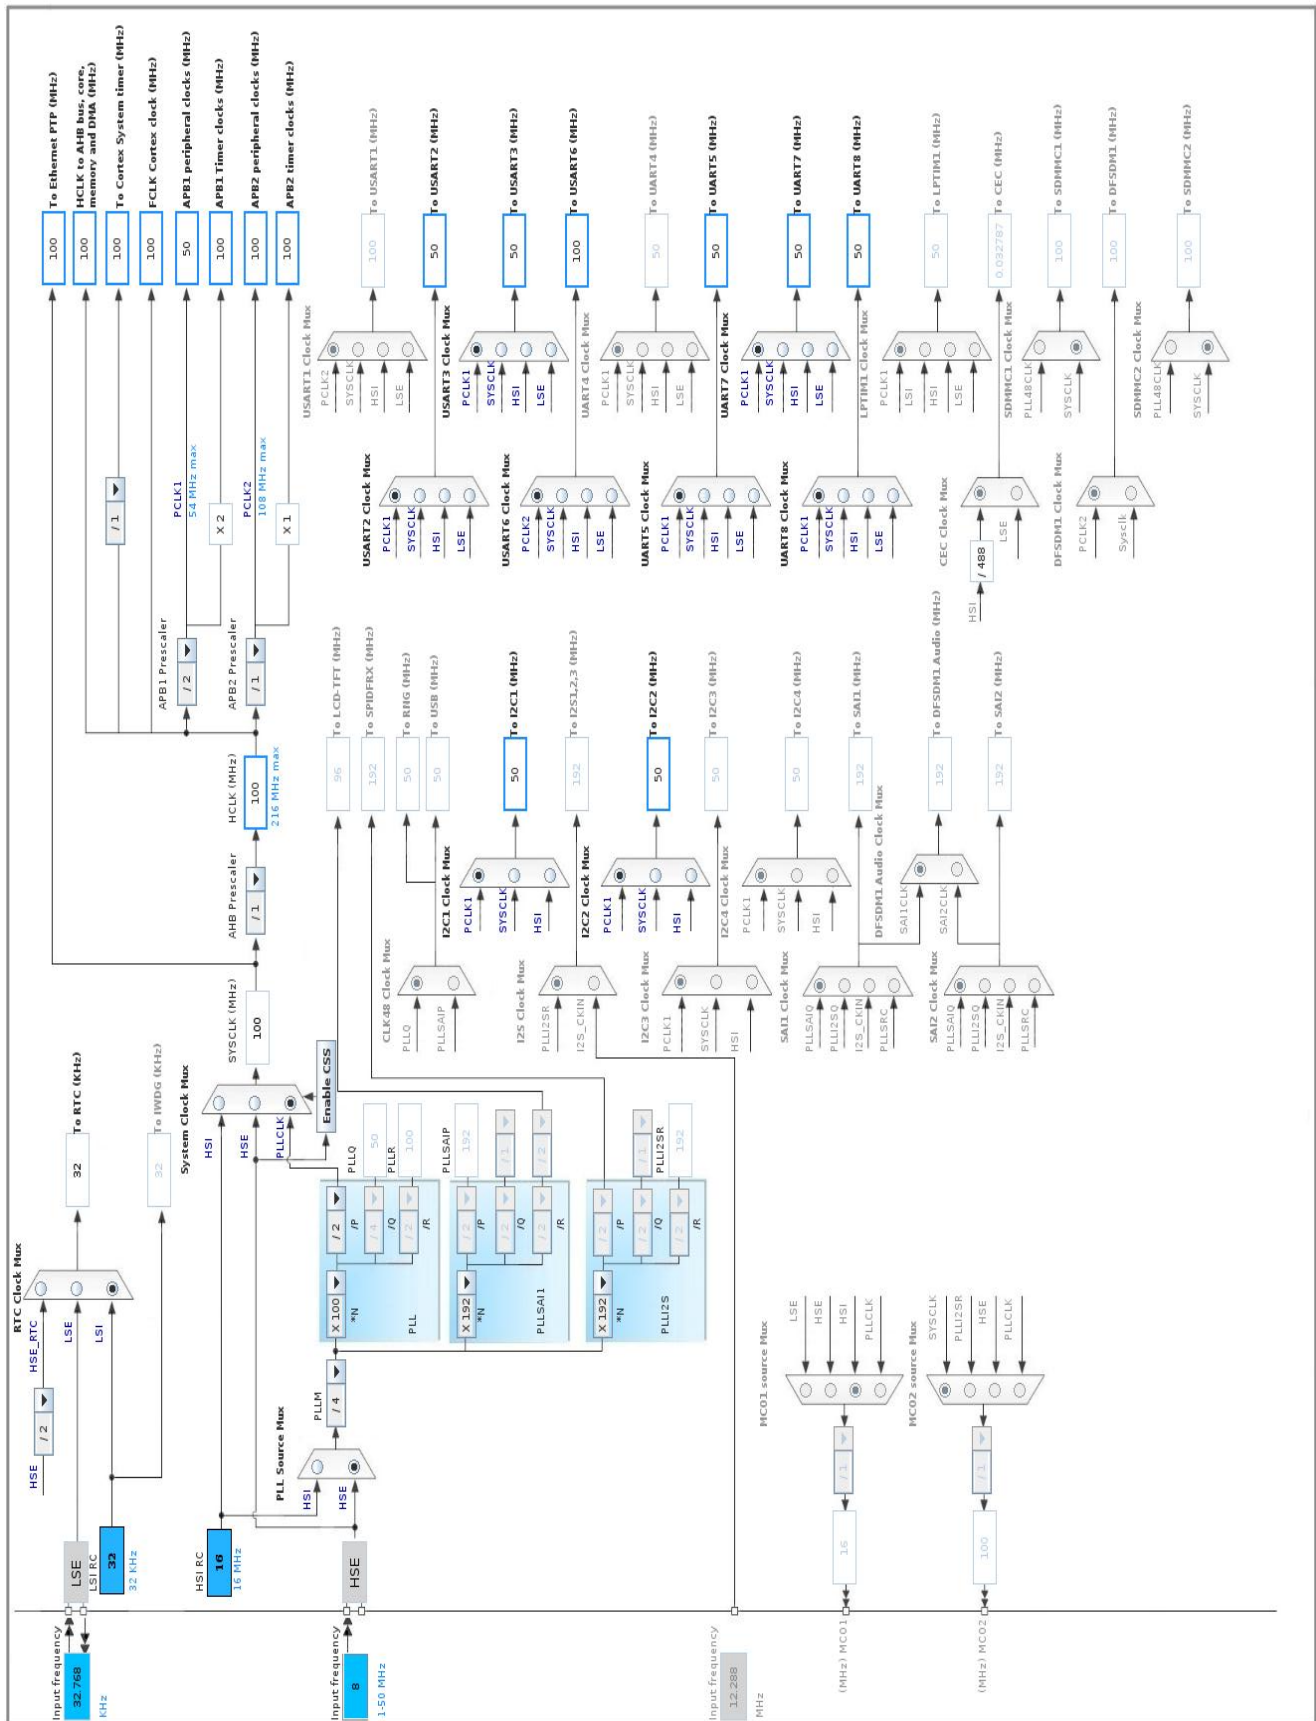

## 5. IPs and Middleware Configuration

### 5.1. CRC

mode: Activated

#### 5.1.1. Parameter Settings:

##### Basic Parameters:

Default Polynomial State	Enable
Default Init Value State	Enable

##### Advanced Parameters:

Input Data Inversion Mode	None
Output Data Inversion Mode	Disable
Input Data Format	Bytes

### 5.2. I2C1

I2C: I2C

#### 5.2.1. Parameter Settings:

##### Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	<b>0x00C0EAFF *</b>

##### Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

### 5.3. I2C2

I2C: I2C

### 5.3.1. Parameter Settings:

#### Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	<b>0x00C0EAF</b> *

#### Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

## 5.4. RCC

**High Speed Clock (HSE): BYPASS Clock Source**

**Low Speed Clock (LSE) : Crystal/Ceramic Resonator**

### 5.4.1. Parameter Settings:

#### System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	3 WS (4 CPU cycle)

#### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

#### Power Parameters:

Power Over Drive	Enabled
Power Regulator Voltage Scale	Power Regulator Voltage Scale 3

## 5.5. RTC



## mode: Activate Clock Source

### 5.5.1. Parameter Settings:

#### General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

## 5.6. SPI1

### Mode: Full-Duplex Master

#### 5.6.1. Parameter Settings:

##### Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

##### Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	<b>50.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

##### Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

## 5.7. SPI2

### Mode: Full-Duplex Master

#### 5.7.1. Parameter Settings:

##### Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

##### Clock Parameters:

Prescaler (for Baud Rate)	2
---------------------------	---

Baud Rate	<b>25.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

**Advanced Parameters:**

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

## 5.8. SYS

**Debug: Serial Wire**

**Timebase Source: SysTick**

## 5.9. TIM1

**Clock Source : Internal Clock**

### 5.9.1. Parameter Settings:

**Counter Settings:**

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	0
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

**Trigger Output (TRGO) Parameters:**

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

## 5.10. TIM2

**Clock Source : Internal Clock**

### 5.10.1. Parameter Settings:

**Counter Settings:**

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value )	0

Internal Clock Division (CKD)	No Division
auto-reload preload	Disable
<b>Trigger Output (TRGO) Parameters:</b>	
Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

## 5.11. TIM3

**Clock Source : Internal Clock**

### 5.11.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>9999 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>99 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

## 5.12. TIM4

**Clock Source : Internal Clock**

### 5.12.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>9999 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>99 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

## 5.13. UART5

Mode: Asynchronous

### 5.13.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

#### Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

## 5.14. UART7

Mode: Asynchronous

### 5.14.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

#### Advanced Features:

Auto Baudrate	Disable
---------------	---------

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

## 5.15. UART8

**Mode: Asynchronous**

### 5.15.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

#### Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

## 5.16. USART2

**Mode: Asynchronous**

### 5.16.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
-----------	--------

Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

**Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

**Advanced Features:**

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

## 5.17. USART3

### Mode: Asynchronous

#### 5.17.1. Parameter Settings:

**Basic Parameters:**

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

**Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

**Advanced Features:**

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

## 5.18. USART6

Mode: Asynchronous

### 5.18.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

#### Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	Very High *	I2C1_X_SCL
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	Very High *	I2C1_X_SDA
I2C2	PF0	I2C2_SDA	Alternate Function Open Drain	Pull-up	Very High *	
	PF1	I2C2_SCL	Alternate Function Open Drain	Pull-up	Very High *	
RCC	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	MCO [STM32F103CBT6_PA8]
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SPI2	PC2	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC3	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB10	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
UART5	PB12	UART5_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC12	UART5_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	



IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
					*	
UART7	PF6	UART7_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PF7	UART7_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
UART8	PE0	UART8_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PE1	UART8_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART2	PD5	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	UART2_WIFI_TX
	PD6	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	UART2_WIFI_RX
USART3	PD8	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	STLK_RX [STM32F103CBT6_PA3]
	PD9	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	STLK_TX [STM32F103CBT6_PA2]
USART6	PC6	USART6_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC7	USART6_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
Single Mapped Signals	PC1	ETH_MDC	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDC [LAN8742A-CZ-TR_MDC]
	PA1	ETH_REF_CLK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_REF_CLK [LAN8742A-CZ-TR_REFCLK0]
	PA2	ETH_MDIO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDIO [LAN8742A-CZ-TR_MDIO]
	PA7	ETH_CRS_DV	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_CRS_DV [LAN8742A-CZ-TR_CRS_DV]
	PC4	ETH_RXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD0 [LAN8742A-CZ-TR_RXD0]
	PC5	ETH_RXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD1 [LAN8742A-CZ-TR_RXD1]
	PB13	ETH_TXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD1 [LAN8742A-CZ-TR_TXD1]
	PA8	USB_OTG_FS_	Alternate Function Push Pull	No pull-up and no pull-down	Very High	USB_SOF [TP1]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		SOF			*	
	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	USB_VBUS
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_ID
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USB_DP
	PD0	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD1	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PG11	ETH_TX_EN	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TX_EN [LAN8742A-CZ-TR_TXEN]
	PG13	ETH_TXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD0 [LAN8742A-CZ-TR_TXD0]
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_Btn [B1]
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Red]
	PG6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USB_PowerSwitchOn [STMPS2151STR_EN]
	PG7	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	USB_OverCurrent [STMPS2151STR_FAULT]
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Blue]

## 6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART3_RX	DMA1_Stream1	Peripheral To Memory	Low
USART3_TX	DMA1_Stream3	Memory To Peripheral	Low
USART2_RX	DMA1_Stream5	Peripheral To Memory	Low
USART2_TX	DMA1_Stream6	Memory To Peripheral	Low

### USART3\_RX: DMA1\_Stream1 DMA request Settings:

Mode: Normal  
 Use fifo: Disable  
 Peripheral Increment: Disable  
 Memory Increment: **Enable \***  
 Peripheral Data Width: Byte  
 Memory Data Width: Byte

### USART3\_TX: DMA1\_Stream3 DMA request Settings:

Mode: Normal  
 Use fifo: Disable  
 Peripheral Increment: Disable  
 Memory Increment: **Enable \***  
 Peripheral Data Width: Byte  
 Memory Data Width: Byte

### USART2\_RX: DMA1\_Stream5 DMA request Settings:

Mode: Normal  
 Use fifo: Disable  
 Peripheral Increment: Disable  
 Memory Increment: **Enable \***  
 Peripheral Data Width: Byte  
 Memory Data Width: Byte

### USART2\_TX: DMA1\_Stream6 DMA request Settings:

Mode: Normal  
 Use fifo: Disable

Peripheral Increment: Disable  
Memory Increment: **Enable \***  
Peripheral Data Width: Byte  
Memory Data Width: Byte

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 stream1 global interrupt	true	0	0
DMA1 stream3 global interrupt	true	0	0
DMA1 stream5 global interrupt	true	0	0
DMA1 stream6 global interrupt	true	0	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
TIM2 global interrupt	unused		
TIM3 global interrupt	unused		
TIM4 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt	unused		
I2C2 error interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
UART5 global interrupt	unused		
USART6 global interrupt	unused		
FPU global interrupt	unused		
UART7 global interrupt	unused		
UART8 global interrupt	unused		

**\* User modified value**

## **7. Power Consumption Calculator report**

### 7.1. Microcontroller Selection

Series	STM32F7
Line	STM32F7x7
MCU	STM32F767ZITx
Datasheet	029041_Rev4

### 7.2. Parameter Selection

Temperature	25
Vdd	3.6

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	RobotSTV2
Project Folder	/home/tapio/Projects/Electronics/RobotSTV2
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F7 V1.12.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No



## ***9. Software Pack Report***