1. Description

1.1. Project

Project Name	Ass-03-STM32
Board Name	STM32F407G-DISC1
Generated with:	STM32CubeMX 4.19.0
Date	05/16/2017

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

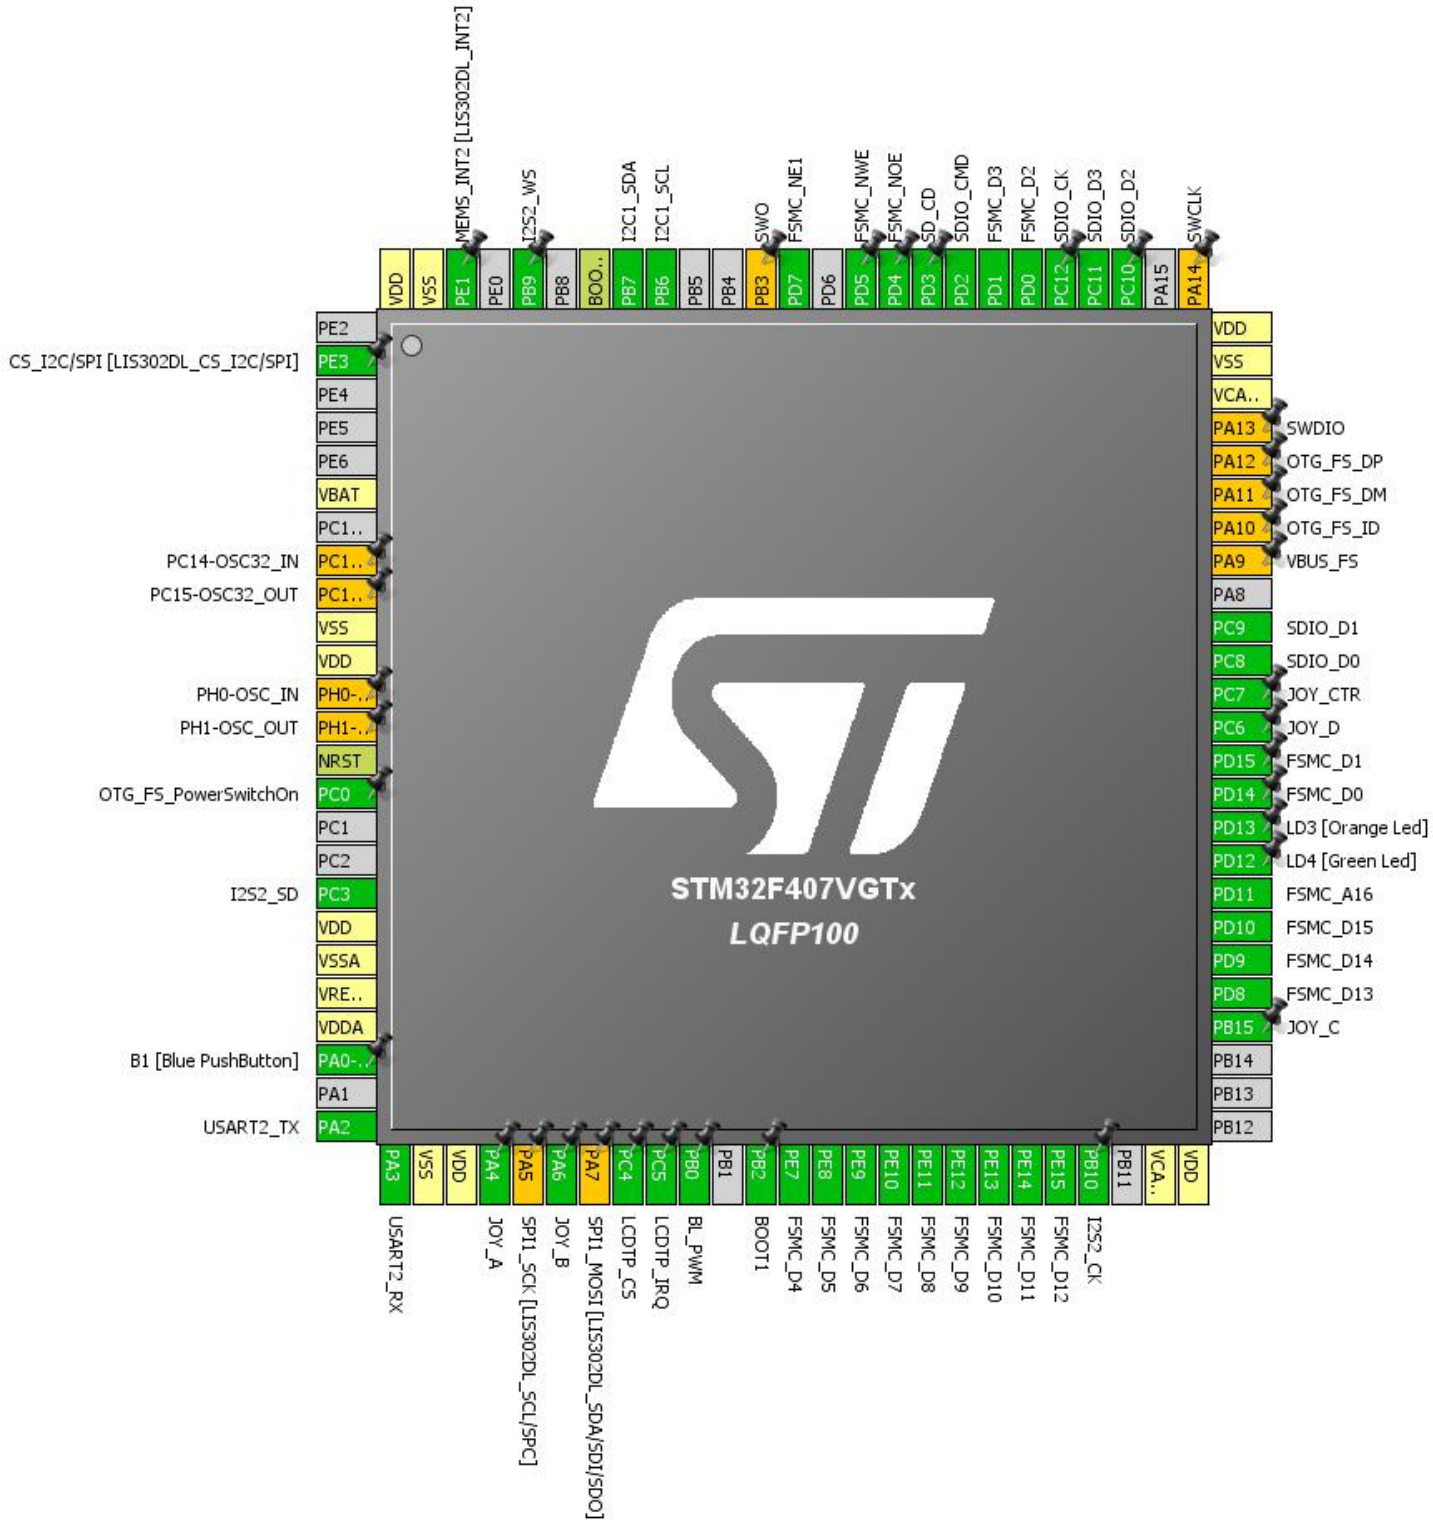

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN **	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1-OSC_OUT **	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3	I/O	I2S2_SD	
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1 [Blue PushButton]
25	PA2	I/O	USART2_TX	
26	PA3	I/O	USART2_RX	
27	VSS	Power		
28	VDD	Power		
29	PA4 *	I/O	GPIO_Input	JOY_A
30	PA5 **	I/O	SPI1_SCK	SPI1_SCK [LIS302DL_SCL/SPC]
31	PA6 *	I/O	GPIO_Input	JOY_B
32	PA7 **	I/O	SPI1_MOSI	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
33	PC4 *	I/O	GPIO_Output	LCDTP_CS
34	PC5 *	I/O	GPIO_Input	LCDTP_IRQ
35	PB0 *	I/O	GPIO_Output	BL_PWM
37	PB2 *	I/O	GPIO_Input	BOOT1
38	PE7	I/O	FSMC_D4	
39	PE8	I/O	FSMC_D5	
40	PE9	I/O	FSMC_D6	
41	PE10	I/O	FSMC_D7	
42	PE11	I/O	FSMC_D8	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
43	PE12	I/O	FSMC_D9	
44	PE13	I/O	FSMC_D10	
45	PE14	I/O	FSMC_D11	
46	PE15	I/O	FSMC_D12	
47	PB10	I/O	I2S2_CK	
49	VCAP_1	Power		
50	VDD	Power		
54	PB15 *	I/O	GPIO_Input	JOY_C
55	PD8	I/O	FSMC_D13	
56	PD9	I/O	FSMC_D14	
57	PD10	I/O	FSMC_D15	
58	PD11	I/O	FSMC_A16	
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14	I/O	FSMC_D0	
62	PD15	I/O	FSMC_D1	
63	PC6 *	I/O	GPIO_Input	JOY_D
64	PC7 *	I/O	GPIO_Input	JOY_CTR
65	PC8	I/O	SDIO_D0	
66	PC9	I/O	SDIO_D1	
68	PA9 **	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11 **	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12 **	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13 **	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14 **	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10	I/O	SDIO_D2	
79	PC11	I/O	SDIO_D3	
80	PC12	I/O	SDIO_CK	
81	PD0	I/O	FSMC_D2	
82	PD1	I/O	FSMC_D3	
83	PD2	I/O	SDIO_CMD	
84	PD3 *	I/O	GPIO_Input	SD_CD
85	PD4	I/O	FSMC_NOE	
86	PD5	I/O	FSMC_NWE	
88	PD7	I/O	FSMC_NE1	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	
93	PB7	I/O	I2C1_SDA	
94	BOOT0	Boot		
96	PB9	I/O	I2S2_WS	
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [LIS302DL_INT2]
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

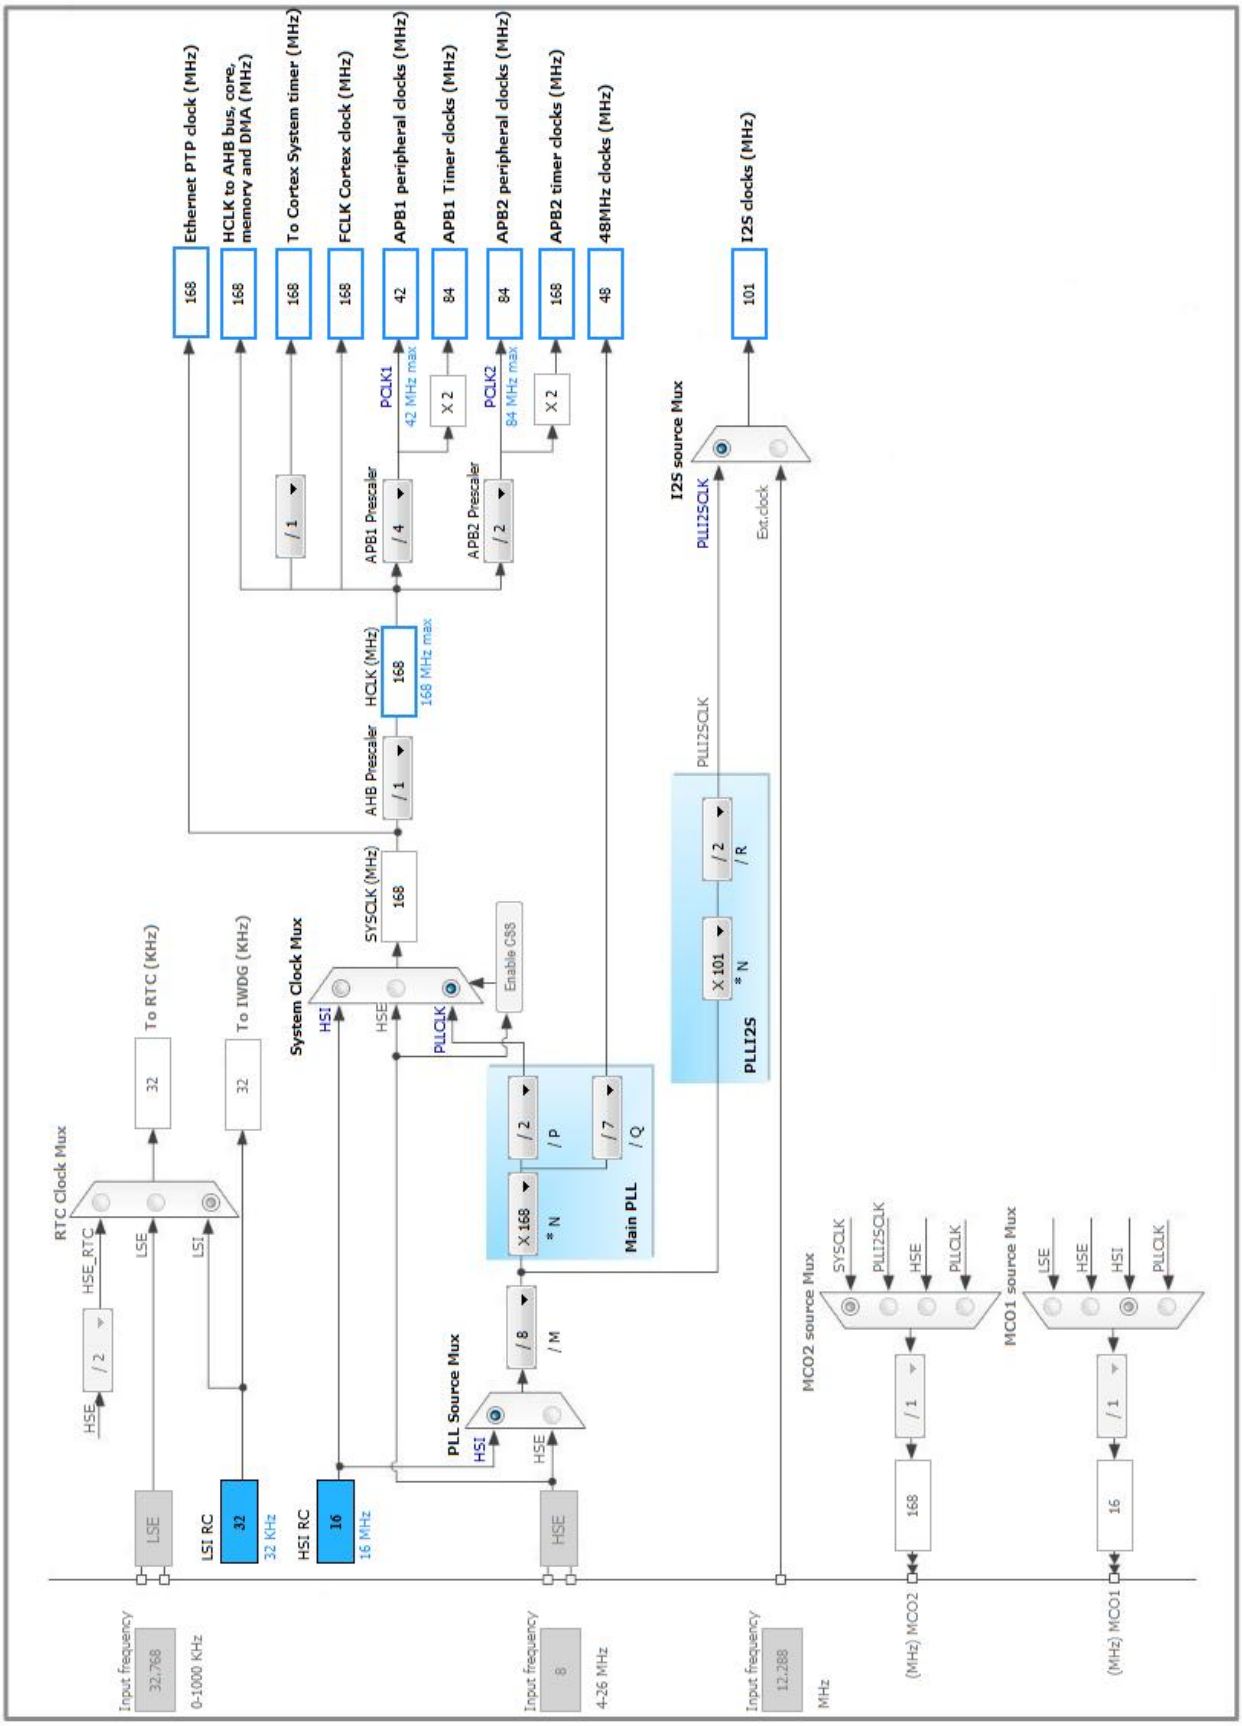

5. IPs and Middleware Configuration

5.1. FSMC

NOR Flash/PSRAM/SRAM/ROM/LCD 1

Chip Select: set

Memory type: LCD Interface

LCD Register Select: A16

Data: 16 bits

5.1.1. NOR/PSRAM 1:

NOR/PSRAM control:

Memory type	LCD Interface
Bank	Bank 1 NOR/PSRAM 1
Write operation	Enabled
Extended mode	Disabled

NOR/PSRAM timing:

Address setup time in HCLK clock cycles	**2 ***
Data setup time in HCLK clock cycles	**13 ***
Bus turn around time in HCLK clock cycles	**0 ***

5.2. I2C1

I2C: I2C

5.2.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.3. I2S2

Mode: Half-Duplex Master

5.3.1. Parameter Settings:

Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	8 KHz
Real Audio Frequency	**7.99 KHz ***
Error between Selected and Real	**-0.12 % ***

Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

5.4. SDIO

Mode: SD 4 bits Wide bus

5.4.1. Parameter Settings:

SDIO parameters:

SDIOCLK clock divide factor	0

5.5. SYS

Timebase Source: TIM1

5.6. USART2

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.7. FATFS

mode: SD Card

5.7.1. Set Defines:

Version:

FATFS version	R0.11

Function Parameters:

FS_TINY (Tiny mode)	Disabled
FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FORWARD (Forward function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FASTSEEK (Fast seek function)	Enabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1 (Windows)
USE_LFN (Use Long Filename)	**Enabled with dynamic working buffer on the HEAP ***
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled

USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Enabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

5.7.2. IPs instances:

SDIO/SDMMC:

SDIO instance	SDIO

5.8. FREERTOS

mode: Enabled

5.8.1. Config parameters:

Versions:

FreeRTOS version	8.2.3
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	**Enabled ***
QUEUE_REGISTRY_SIZE	8

USE_APPLICATION_TASK_TAG	Disabled
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled
GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	**Enabled ***
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.8.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled

xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FSMC	PE7	FSMC_D4	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE8	FSMC_D5	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE9	FSMC_D6	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE10	FSMC_D7	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE11	FSMC_D8	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE12	FSMC_D9	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE13	FSMC_D10	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE14	FSMC_D11	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE15	FSMC_D12	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD8	FSMC_D13	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD9	FSMC_D14	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD10	FSMC_D15	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD11	FSMC_A16	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD14	FSMC_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD15	FSMC_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD0	FSMC_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD1	FSMC_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD4	FSMC_NOE	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD5	FSMC_NWE	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD7	FSMC_NE1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	**Very High ***	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	**Very High ***	
I2S2	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB9	I2S2_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	
SDIO	PC8	SDIO_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC9	SDIO_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC10	SDIO_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC11	SDIO_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC12	SDIO_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD2	SDIO_CMD	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up		

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
					Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	**Very High ***	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_SCK [LIS302DL_SCL/SPC]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_ID
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DP
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA4	GPIO_Input	Input mode	**Pull-up ***	n/a	JOY_A
	PA6	GPIO_Input	Input mode	**Pull-up ***	n/a	JOY_B
	PC4	GPIO_Output	Output Push Pull	**Pull-down ***	Low	LCDTP_CS
	PC5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	LCDTP_IRQ
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	BL_PWM
	PB2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BOOT1
	PB15	GPIO_Input	Input mode		n/a	JOY_C

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
				Pull-up *		
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PC6	GPIO_Input	Input mode	**Pull-up ***	n/a	JOY_D
	PC7	GPIO_Input	Input mode	**Pull-up ***	n/a	JOY_CTR
	PD3	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	SD_CD
	PE1	GPIO_EXTI1	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	MEMS_INT2 [LIS302DL_INT2]

6.2. DMA configuration

DMA request	Stream	Direction	Priority
SDIO_RX	DMA2_Stream3	Peripheral To Memory	Low
SDIO_TX	DMA2_Stream6	Memory To Peripheral	Low
SPI2_TX	DMA1_Stream4	Memory To Peripheral	Low

SDIO_RX: DMA2_Stream3 DMA request Settings:

Mode:	**Peripheral Flow Control ***
Use fifo:	**Enable ***
FIFO Threshold:	Full
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	Word
Peripheral Burst Size:	**4 Increment ***
Memory Burst Size:	4 Increment

SDIO_TX: DMA2_Stream6 DMA request Settings:

Mode:	**Peripheral Flow Control ***
Use fifo:	**Enable ***
FIFO Threshold:	Full
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	Word
Peripheral Burst Size:	**4 Increment ***
Memory Burst Size:	4 Increment

SPI2_TX: DMA1_Stream4 DMA request Settings:

Mode:	Normal
Use fifo:	**Enable ***
FIFO Threshold:	Full
Peripheral Increment:	Disable
Memory Increment:	**Enable ***

Peripheral Data Width:	**Half Word ***
Memory Data Width:	**Half Word ***
Peripheral Burst Size:	Single
Memory Burst Size:	Single

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 stream4 global interrupt	true	5	0
TIM1 update interrupt and TIM10 global interrupt	true	5	0
SPI2 global interrupt	true	5	0
USART2 global interrupt	true	5	0
DMA2 stream3 global interrupt	true	5	0
DMA2 stream6 global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
EXTI line0 interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SDIO global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev7

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	Ass-03-STM32
Project Folder	C:\Users\pstepien\workspace\Ass-03-STM32
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.14.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No