

Teensy 3.2 Breakout (Revision C, Basic)

This is a breakout for the Teensy 3.2 development board by PJRC. Included are all the pin headers you need to assemble it, a 32.768 kHz crystal for use with the RTC (Real-Time Clock), a 150 μ F capacitor to enable USB host mode, a switch to select between USB or external power, and two machine screws for more permanent mounting.

The **Basic Edition** is smaller and cheaper than the other editions, requiring no pogo pins for assembly. It omits breaking out a number of signals, namely: USB_{D-}, USB_{D+}, SWCLK, SWDIO, XTAL1, XTAL2, RESET, VDDA, and USBID. However, it does still breakout all 15 additional analog and digital GPIO pins. As an option during assembly, you can use the included jumper (with some pin headers) in place of the slide switch.

Included Parts

- **(1×)** Teensy 3.2 Breakout (Revision C, Basic) bare printed circuit board
- **(3×)** 40-pin (1 row × 40 pins) through-hole male header, 0.1 in (2.54 mm) pin spacing
- **(1×)** 14-pin (2 rows × 7 pins) surface-mount male header, 0.1 in (2.54 mm) pin spacing
- **(2×)** #6-32 × 3/16" stainless steel pan-head machine screw
- **(1×)** 32.768 kHz tuning fork crystal
- **(1×)** 150 μ F tantalum capacitor (2917 package, size D)
- **(1×)** through-hole slide switch (SPDT)
- **(1×)** 2-pin jumper (shunt)

Detailed Specs

- **Grid Spacing** — 0.1 in (2.54 mm)
- **Board Dimensions** — 2.4 in (60.96 mm) × 1.0 in (25.4 mm)
- **Board Surface Area** — 2.4 in² (15.48 cm²)
- **Number of Breakout Pins** — 48 pins (2 rows × 24 pins)
- **Number of Mounting Holes** — 2 holes
- **Mounting Hole Distance** — 2.0 in (50.8 mm)
- **Mounting Hole Diameter** — 0.15 in (3.81 mm)
- **Mounting Hole Pad Diameter** — 0.27 in (6.858 mm)

Recommended Tools

- Soldering iron
- Solder
- Flux
- Breadboard
- Diagonal cutters
- Blue tape
- Razor blade

Contact Info

Name — Daniel Gilbert

Website — tall-dog.com

Email — loglow@gmail.com

Assembly Instructions

1. **Optional:** Cut the trace to separate VIN from VUSB on the underside of the Teensy. This step is recommended as long you also install the slide switch or jumper (step 11) or you know that you're only ever going to use external (non-USB supplied) power. If you're going to install the slide switch or jumper on the breakout board, **you must cut the VIN-VUSB trace!**
2. **Optional:** Install the included 32.768 kHz crystal on the underside of the Teensy for use with the RTC (Real-Time Clock). If you're not sure, you can safely go ahead and install the crystal.
3. **Optional:** Install the included 150 μ F capacitor on the underside of the Teensy for use with USB host mode. **If you're not sure, don't install the capacitor.** You may want to do some research **because you won't be able to install or remove this component later!**
4. Cut a 5-pin length of through-hole header. Align it to interface with the A14, PROGRAM, GND, 3.3V, and VBAT pins along the underside of the Teensy's shorter edge. Solder the header in place. You can use a breadboard to align the pins and an extra header strip turned sideways to keep the Teensy level.
5. Position the double-row 14-pin surface-mount header onto the rectangular pads on the underside of the Teensy. You can put some flux on the pads first, tape the upside-down Teensy to your work surface, then secure the header between the soldered 5-pin header and a second piece of tape. Solder the header in place.
6. Cut another 5-pin through-hole header and remove the metal pin from the 2nd position using your diagonal cutters as pliers. Solder the modified header (now 4-pin with one blank space) onto the underside of the Teensy so it occupies the A11, A10, AREF, and VUSB positions. You can use a breadboard for alignment here.
7. Cut two 14-pin lengths of through-hole header. Position them along the two longer edges on the underside of the Teensy. You won't be able to use a breadboard to align these headers, so you may want to tack them in place before soldering them.
8. Mate the Teensy and the Teensy Breakout board together. You might need to apply some pressure depending on the alignment of the headers. If any pins are significantly misaligned, you may have to manually bend them so the two boards can mate. The distance between the boards will be determined by the surface-mount header since it sits higher than the through-hole headers. As a result, there will be a small gap between the single-row headers and the breakout board, which is normal.
9. Using diagonal cutters, trim all protruding pins so they're reasonably flush with the underside surface of the Teensy Breakout board. You can place your finger over the pin that you're trimming to prevent it from flying across the room when you snip it.

10. Secure the assembly in place with the underside of the Teensy Breakout facing up. You can use two pieces of tape, one placed over each end. Be careful to make sure the gaps remain even on both sides and the two boards remain parallel. Solder all the trimmed pins.
11. **Optional:** Position and solder the through-hole slide switch in the box marked VIN-VUSB on the top side of the Teensy Breakout board. **Alternatively**, you can solder a 3-pin piece of through-hole header facing up in the same holes and attach the included 2-pin jumper. This step is only necessary if you cut the VIN-VUSB trace on the Teensy (back in step 1).
12. Cut two 24-pin lengths of through-hole header. Place them along the two long edges on the underside of the Teensy Breakout board. These exposed header pins will allow the entire assembly to interface with a standard breadboard, which you should use now to ensure proper alignment. Solder the headers in place.
13. Apply light alternating pressure on opposite short ends to remove the entire assembly from the breadboard. Applying too much pressure on one side can causing the pins on the opposite side to bend and break off, so be very careful. Inspect the finished assembly thoroughly. Connect it to power and make sure it functions correctly.


Congratulations, you're finished!

If you enjoy using this board please consider leaving a positive review on Tindie!
If you have any concerns or problems please contact me at the email address above.

Teensy 3.2 Breakout

Basic Edition

Revision C

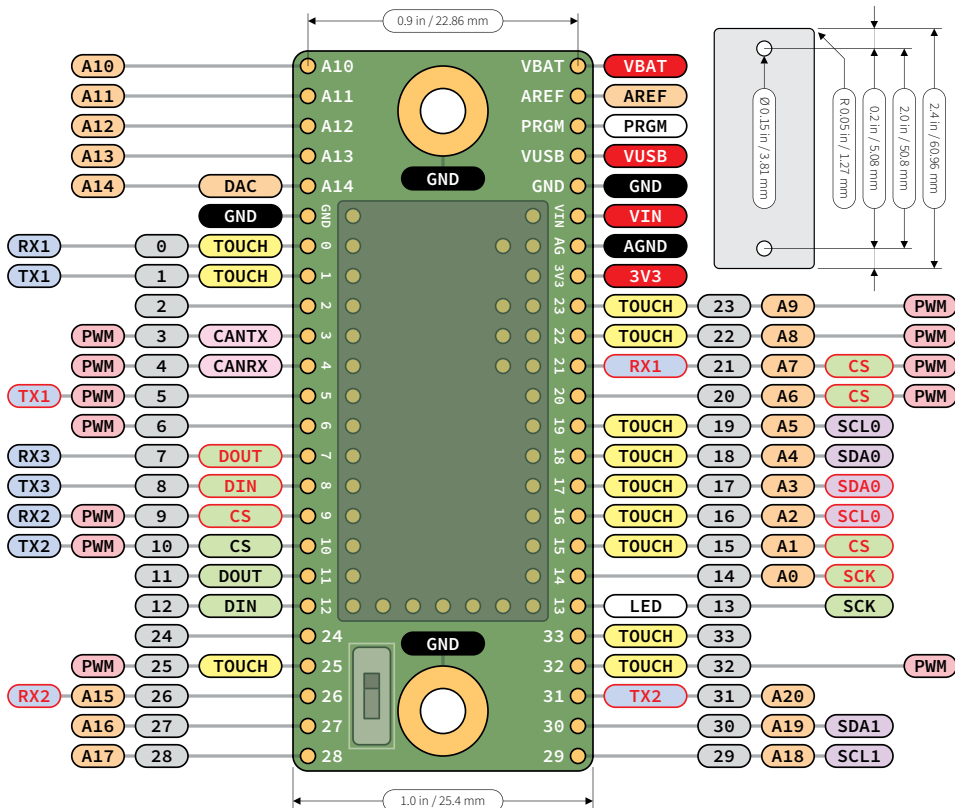

Legend

Voltage Pins

Ground Pins

Digital Pins 34

Analog Pins 21

PWM Pins 12

Touch Sense Pins 12

Serial Ports 3

I2C Ports 2

SPI Port 1

CAN Bus Port 1

Alternate Functions