# Closed-loop multi-sensor SLAM using factor graphs for fixed-wing UAV.

**Adam Radomski**

Master Thesis
Supervised by Timo Hinzmann, Thomas Schneider

# Motivation

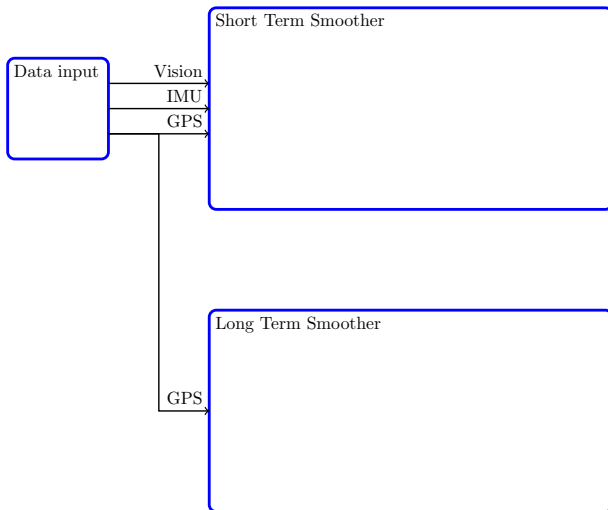Develop localization framework which can simultaneously:

- Estimate local navigation solution with minimal latency
- Find optimal solution given all the measurements



Factor Graph Localization Framework

Short Term Smoother (STS)

Long Term Smoother (LTS)

# Approach

# Work done so far

Backbone of the localization framework

- Short Term Smoother
  - **–** building a full factor graph given sensor data
  - **–** estimating position and passing data to LTS
- Long Term Smoother
  - **–** building a map with the input data
  - **–** "translating" the map to a factor graph
  - **–** optimizing the factor graph and updating data in the map

# Current challenges

- Reading landmarks from the map and translating them into a factor graph
- Inserting fixed landmarks into STS

# Future work

- 3-stage landmark initialization
  - **–** Stage 1: compute 3D landmark coordinate and initialize the feature as binary factor (state $x_k$ and $x_{k+1}$).
  - **–** Stage 2: formulate the feature re-projection factors connecting the 3D landmark state and pose.
  - **–** Stage 3: once uncertainty converges marginalize landmark state and switch back to binary factor formulation.
- Sliding-Window STS
  - **–** Reduce the STS problem to a sliding-window factor graph
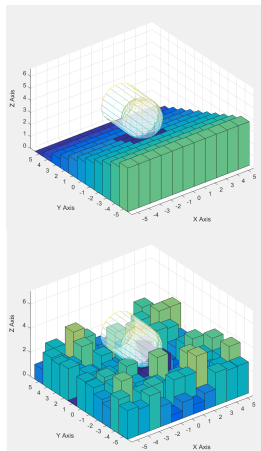
# Overview

**Adding a video**

    Example Slide

# Adding a video



LittleDog walking over rough terrain (S. Schaal, "The latest version of the LittleDog Robot," 2010. https://www.youtube.com/watch?v=nUQsRPJ1dYw)

# Adding a video - Example Slide

- Point 1
- Point 2
  - Point 1.1
  - Point 1.2



Caption