

USB-C INPUT, ESD AND POWER




RADAR SUPPLY FILTERS (one pi filter per domain)

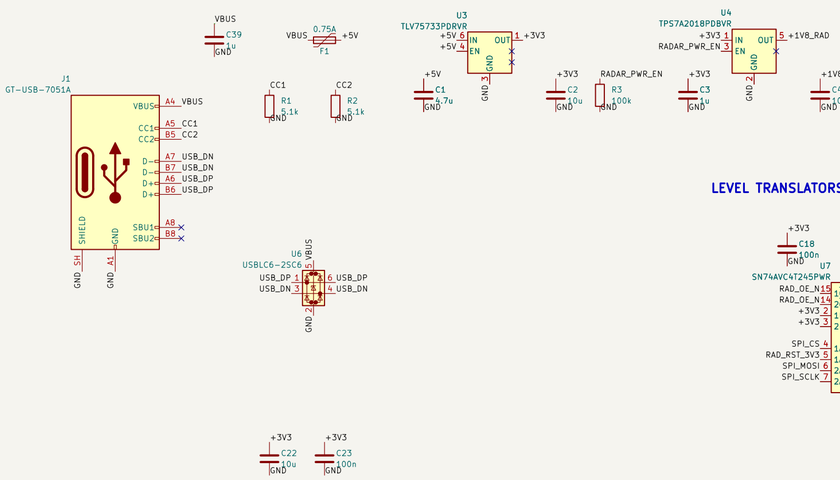


USB CONSOLE (CP2102N)

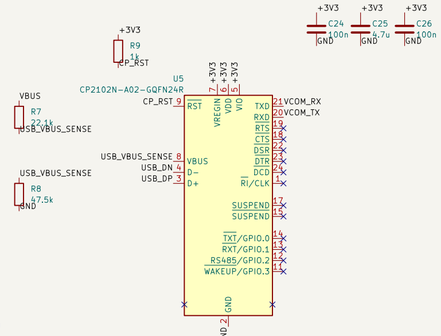


TEST POINTS




LEVEL TRANSLATORS 3.3 V <-> 1.8 V

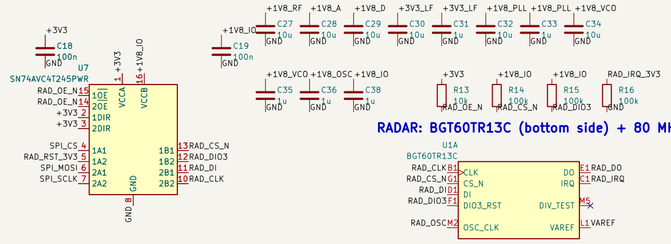


RADAR: BGT60TR13C (bottom side) + 80 MHz XO

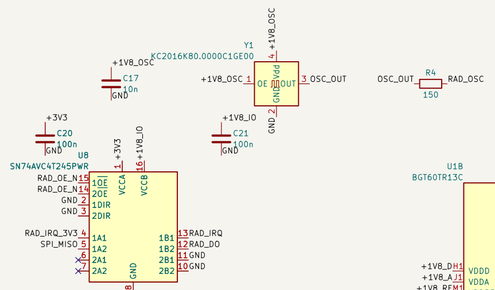


MCU: MGM260P (EFR32MG26, Matter / Thread)





STATUS LED AND BUTTONS





RADAR DECOUPLING (100n at each ball, then 1u)



POWER FLAGS (ERC)



DESIGN NOTES

Radar start-up (firmware): 1) RAD_OE_N=1 (R13 holds it in reset) 2) RADAR_PWR_EN=1 and wait >= 2 ms (TPS7A20 + XO settled)

3) SPI_CS=1 and RAD_RST_3V3=1, then RAD_OE_N=0 4) reset through DIO3 with CS_N=1 (R14/R15 hold CS_N and DIO3 high while OE is inactive)

Pi filter per domain (UG091722 sec. 3.3): +1V8_RAD -> FB1..FB3, FB5..FB8 (RF, A, D, PLL, VCO, OSC, IO); +3V3 -> FB4 (LF). Ferrites BLM18KG601SN1D (0.15 ohm, 1.3 A)

Not a medical device
CERN-OHL-S-2.0
github.com/techmiguel/stillpoint

Sheet: /
File: stillpoint.kicad_sch

Title: Stillpoint — 60 GHz presence and fall sensor

Size: A2	Date: 2026-10-08	Rev: A
KiCad E.D.A. 10.0.5		Id: 1/1