
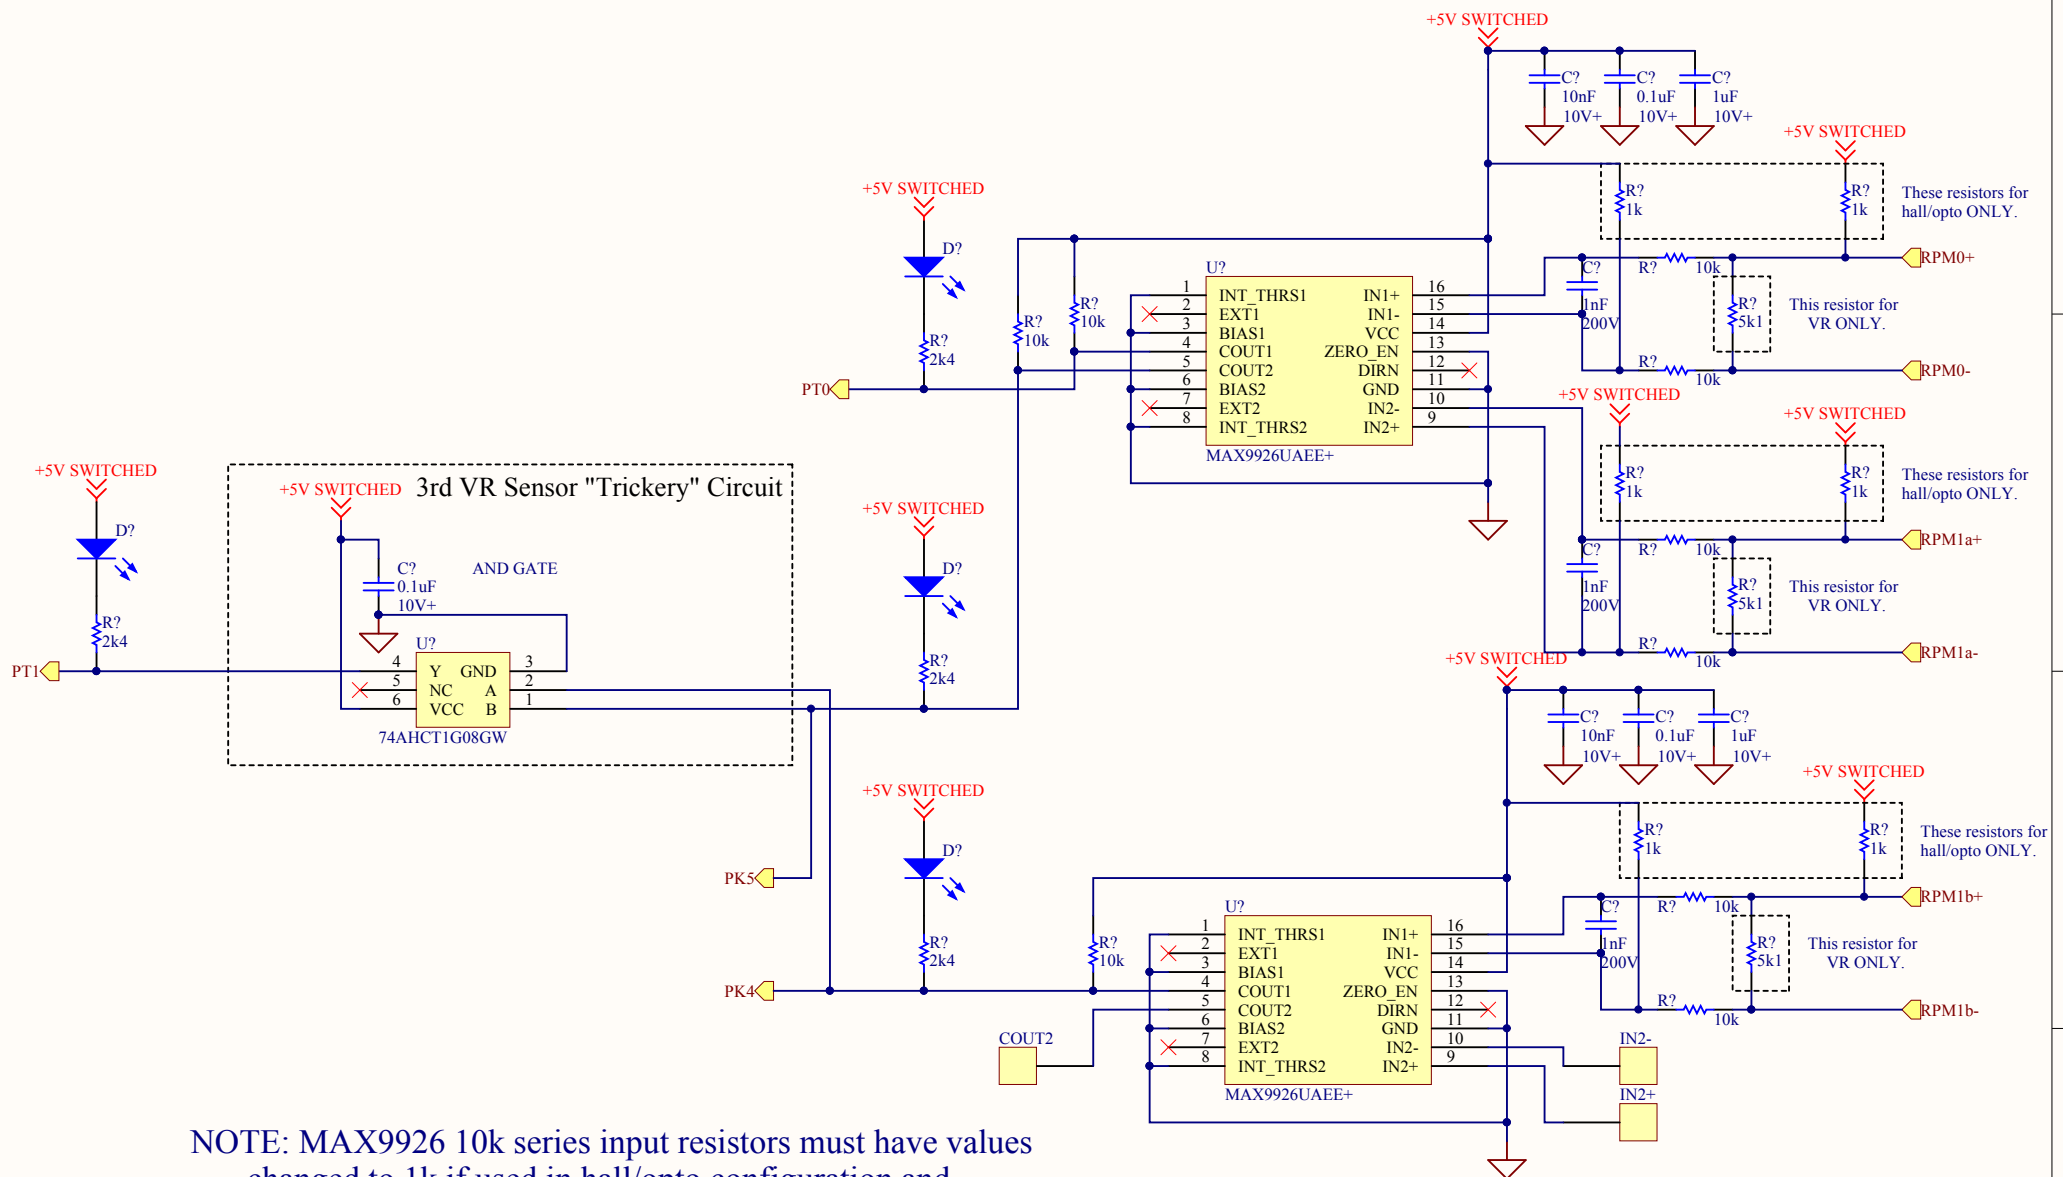
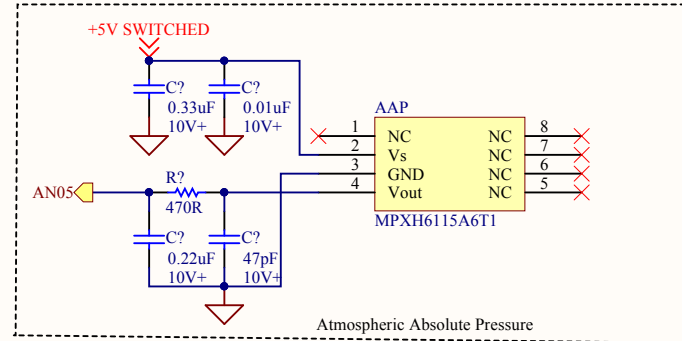
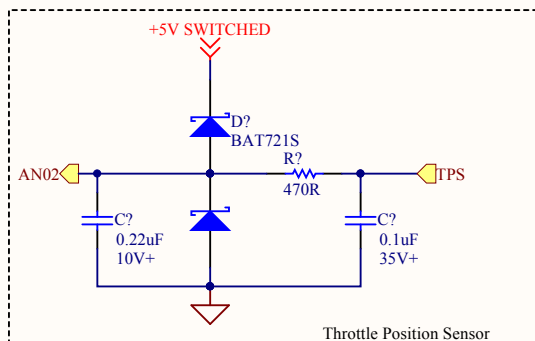
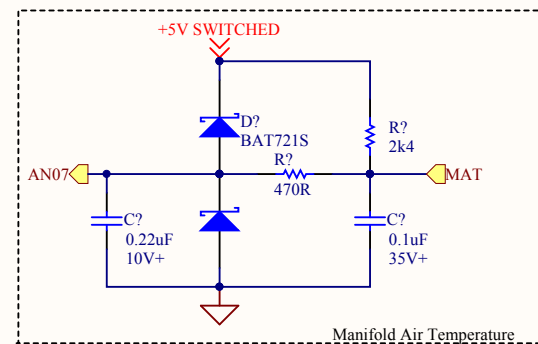
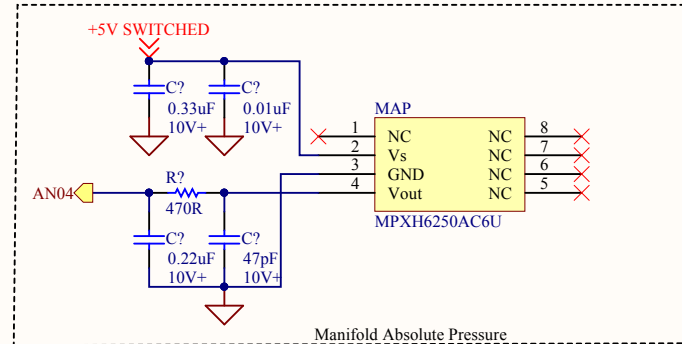
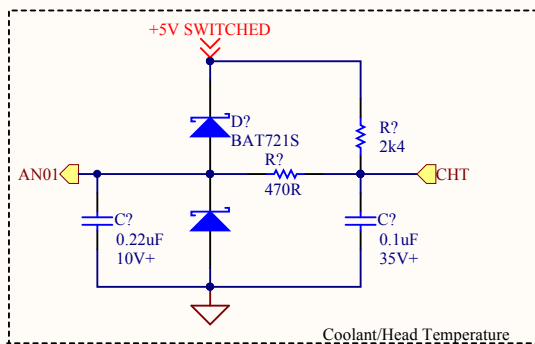
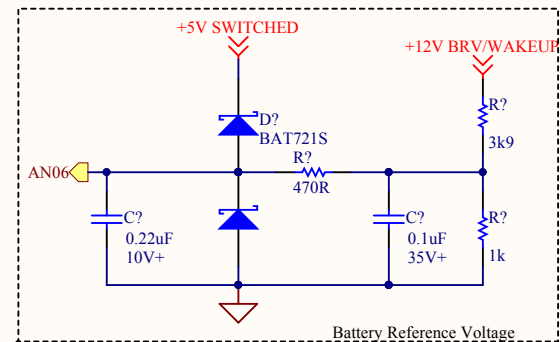
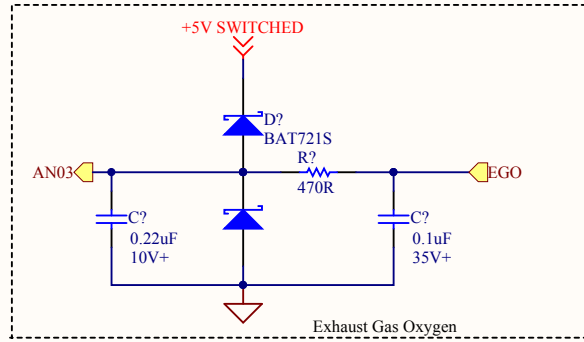
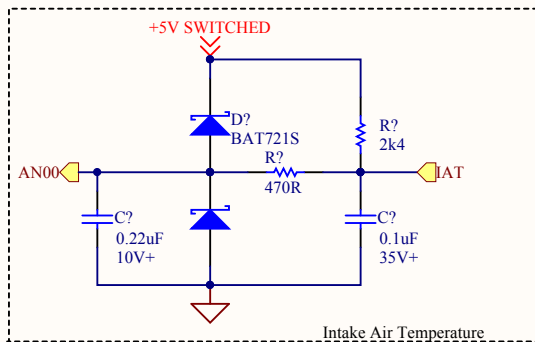


Title Ravage - RS232 Comms			Drawn By: <i>Dan Visser</i>	
Size: A4	Number: A	Revision: 0.2		
Date: 9/02/2013	Time: 9:58:32 AM	Sheet 4 of 16		



NOTE: MAX9926 10k series input resistors must have values changed to 1k if used in hall/opto configuration and the RPM0- inputs must also be externally grounded.

Title Ravage - VR Interfaces			Drawn By: Dan Visser	
Size: A4	Number: A	Revision: 0.2		
Date: 9/02/2013	Time: 9:58:32 AM	Sheet 5 of 16		



SENSOR GND

Title **Ravage - Core Analogue Inputs**

Size: **A4**

Number: **A**

Revision: **0.2**









Date: **9/02/2013**

Time: **9:58:32 AM**

Sheet **6** of **16**

Drawn By:
Dan Visser

Altium

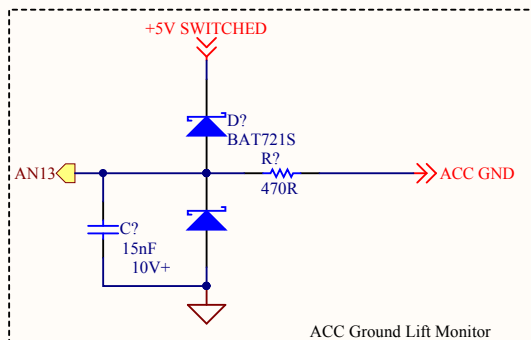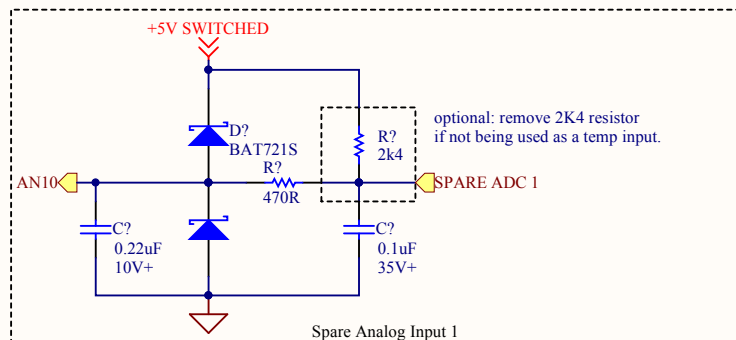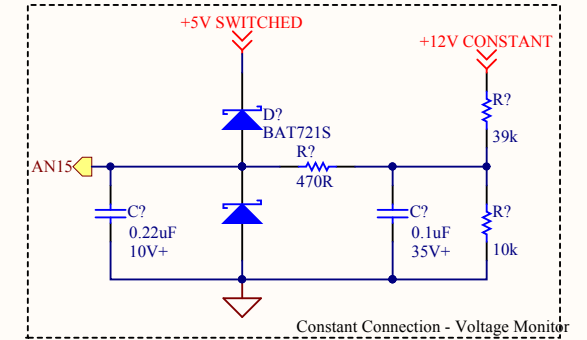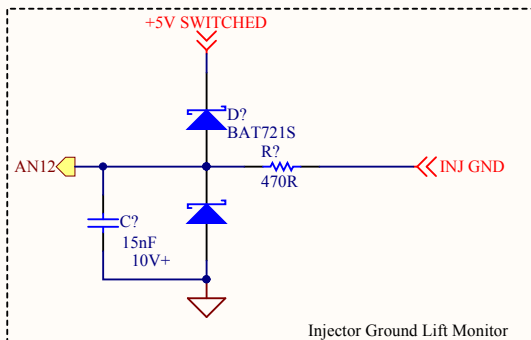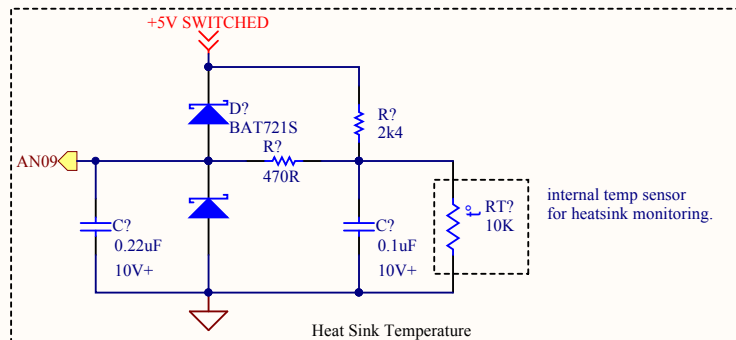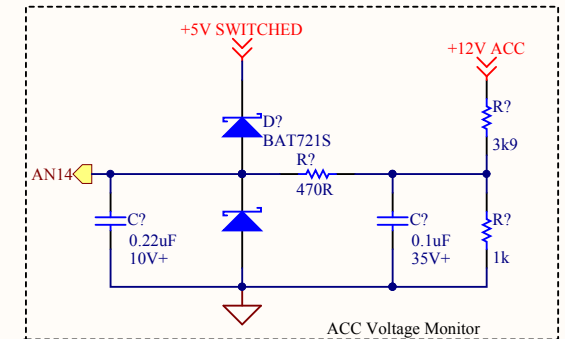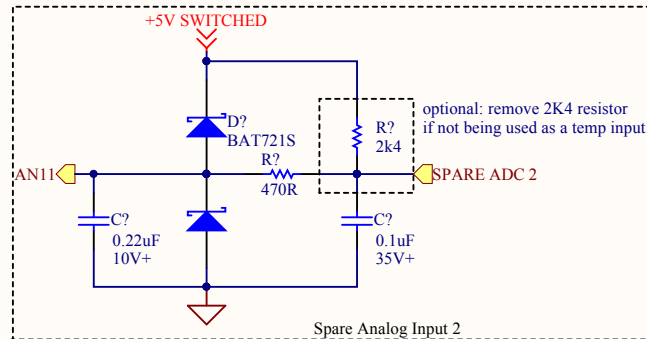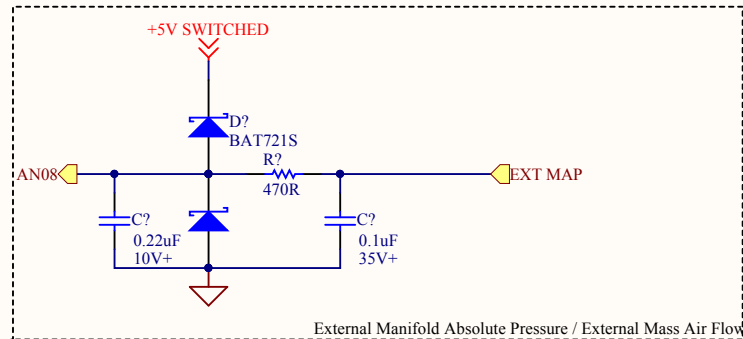

Title **Ravage - Extra Analogue Inputs**

Size: A4

Number: A

Revision: 0.2

Date: 9/02/2013


Time: 9:58:33 AM

Sheet 7 of 16

Drawn By:
Dan Visser

Altium

All inputs 12V capable.

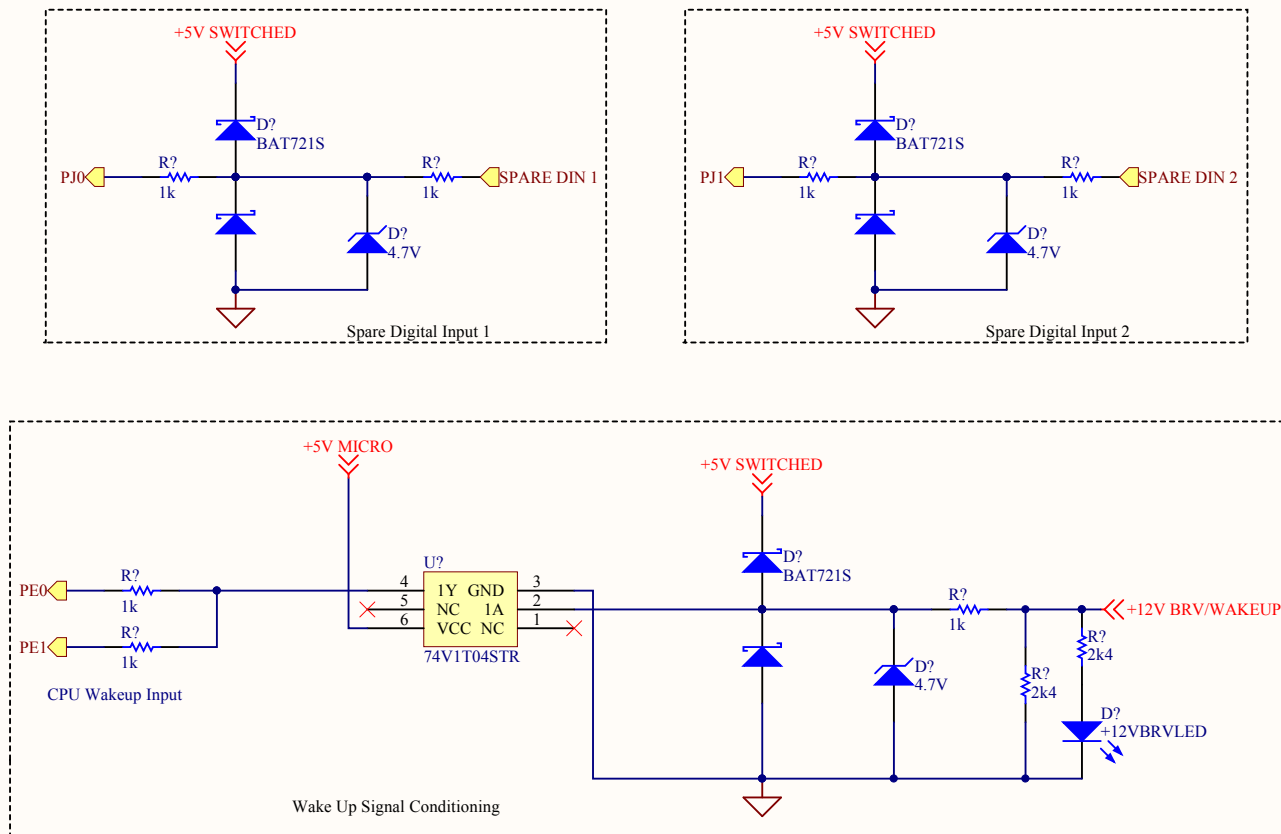

Title **Ravage - Digital Inputs**

Size: A4

Number: A

Revision: 0.2


Date: 9/02/2013


Time: 9:58:33 AM







Sheet 8 of 16






Drawn By:
Dan Visser


Altium

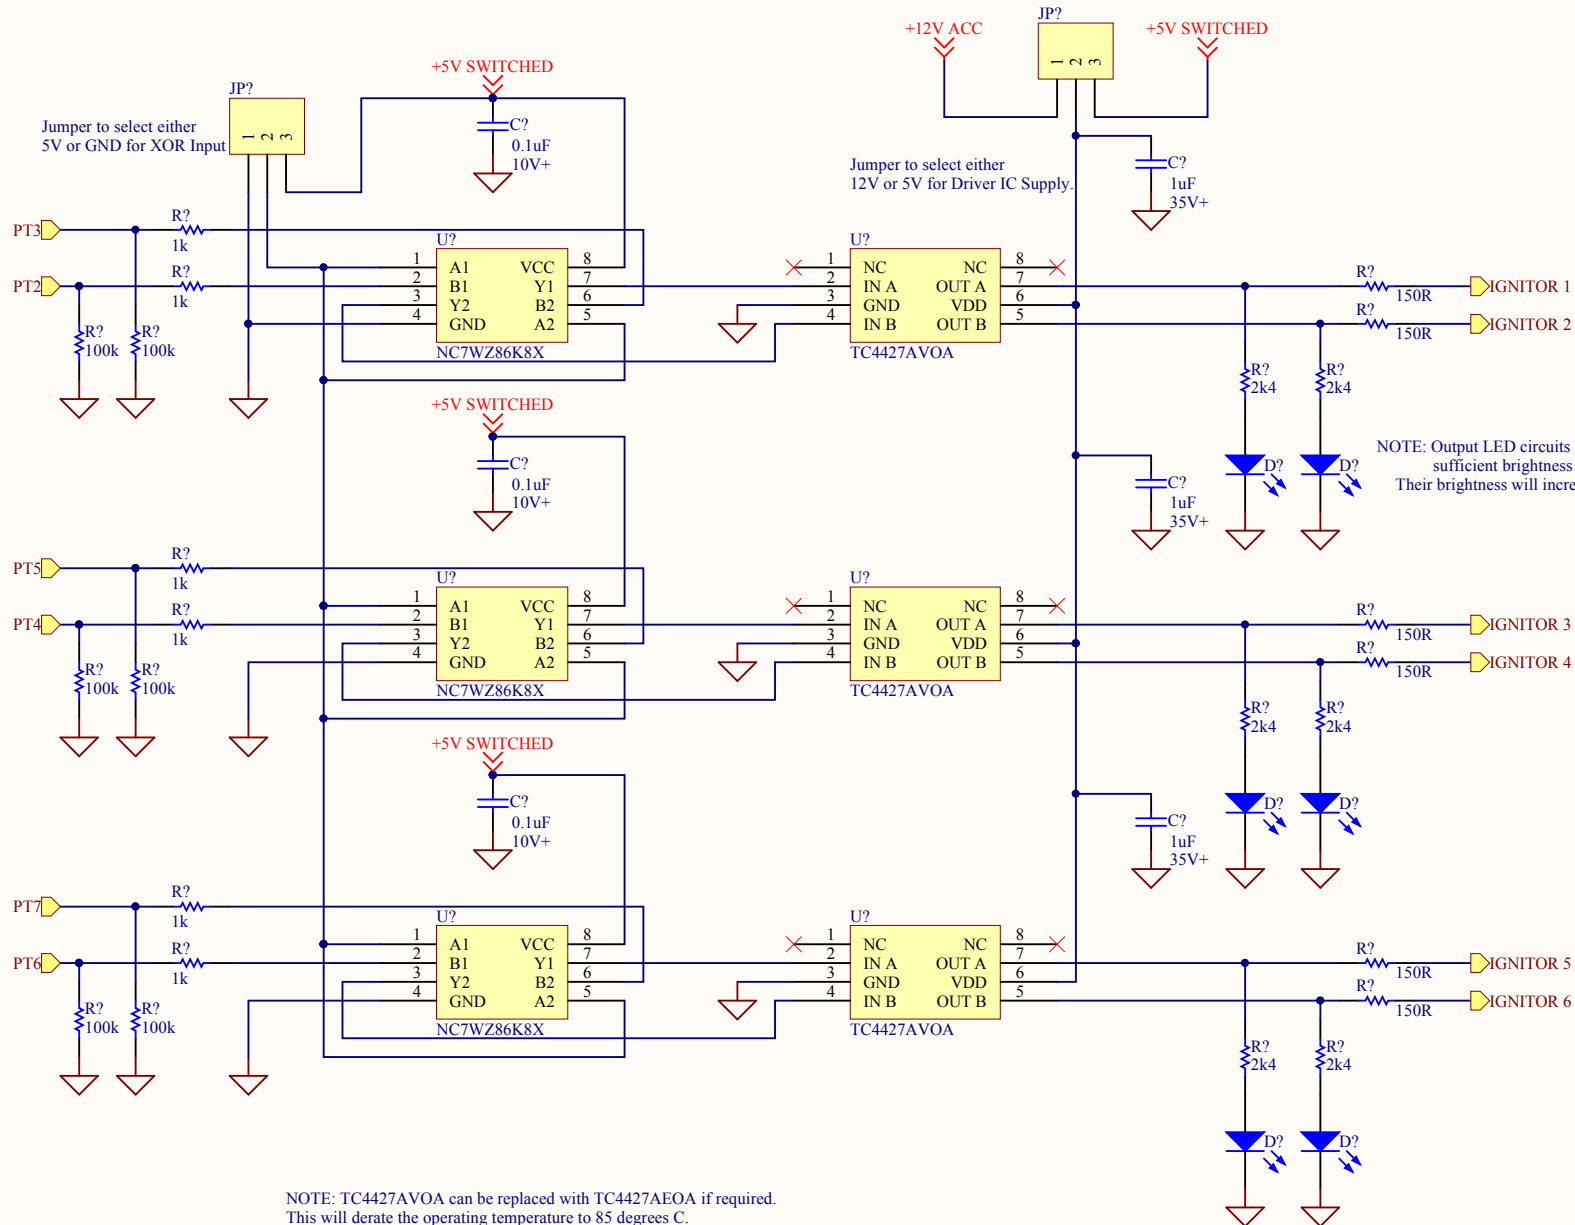


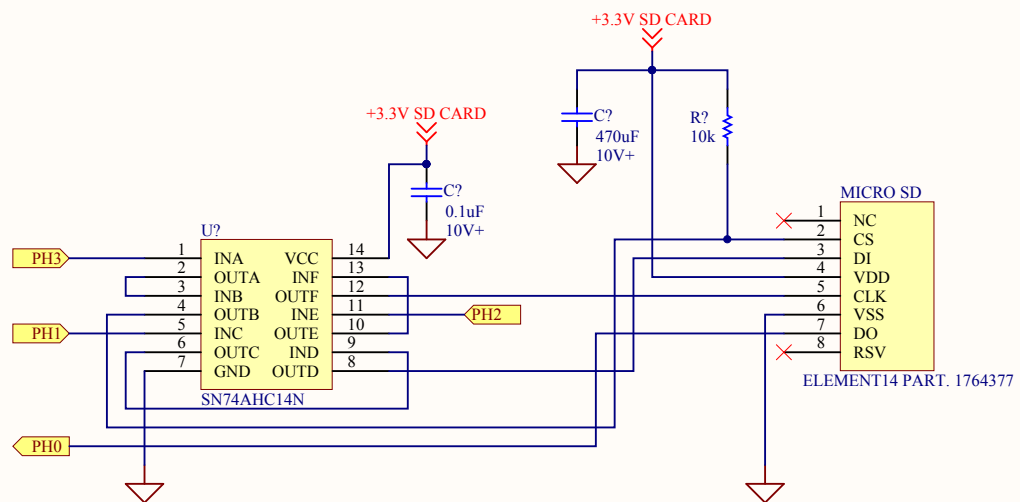
Title Ravage - Ignitor Outputs			Drawn By: Dan Visser	
Size: A4	Number: A	Revision: 0.2		
Date: 9/02/2013	Time: 9:58:33 AM	Sheet 10 of 16		

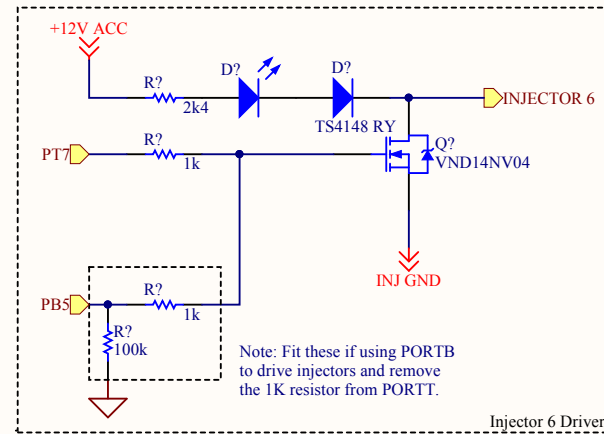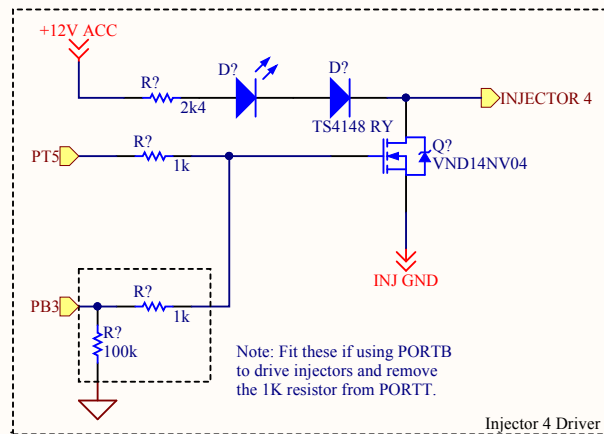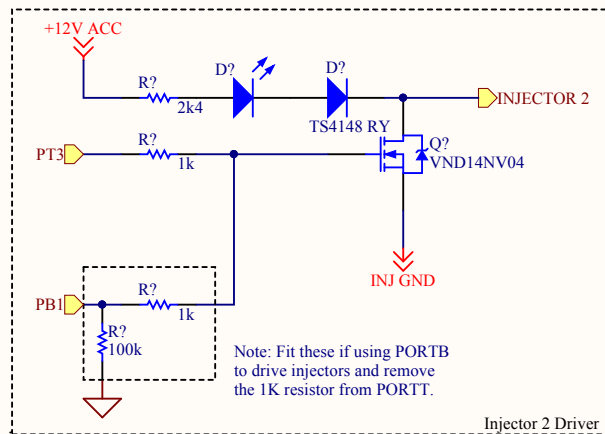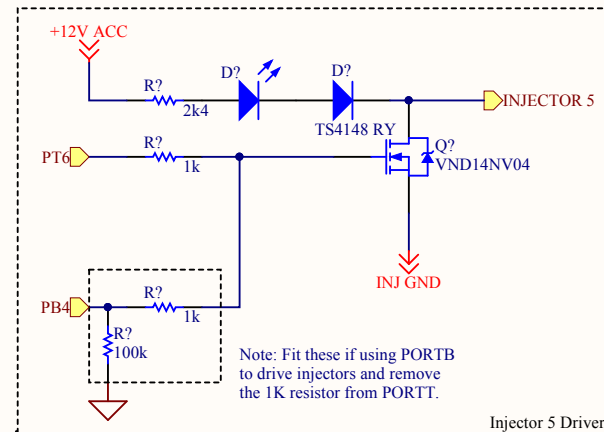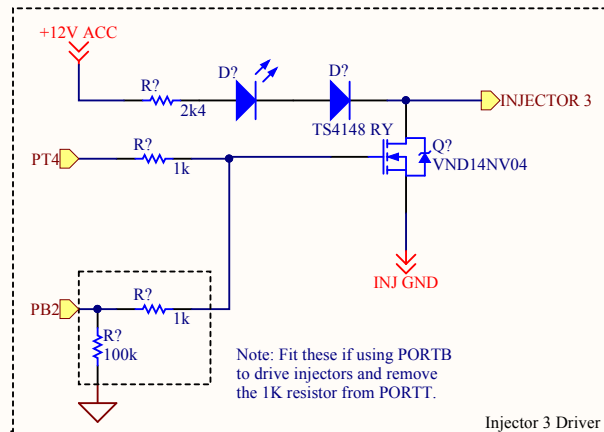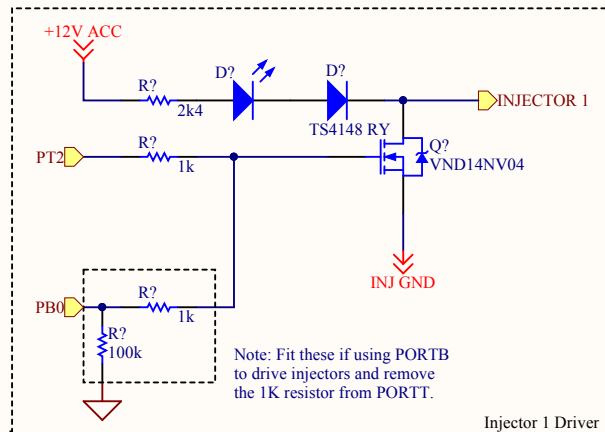

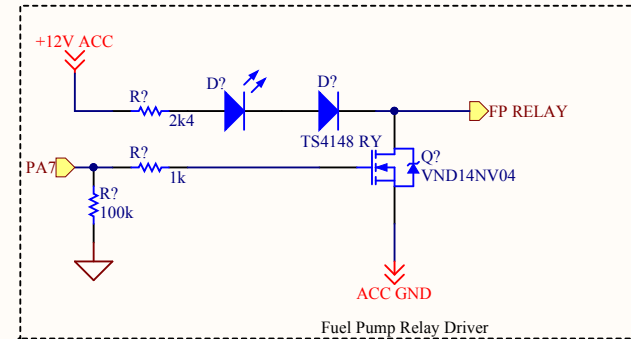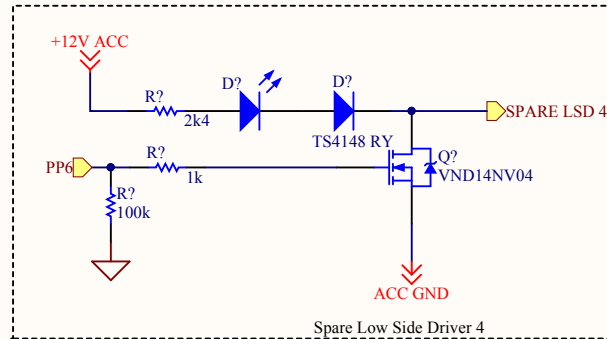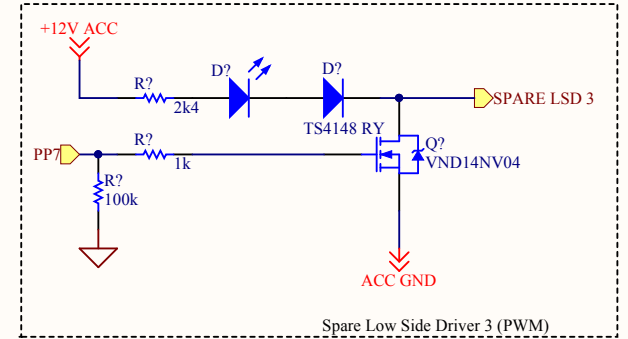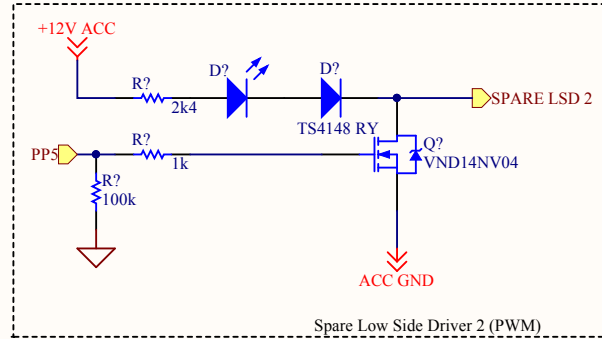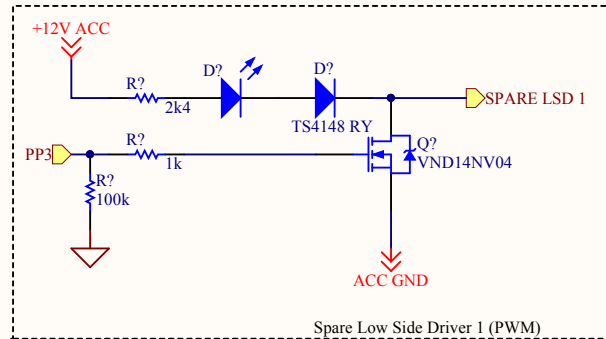


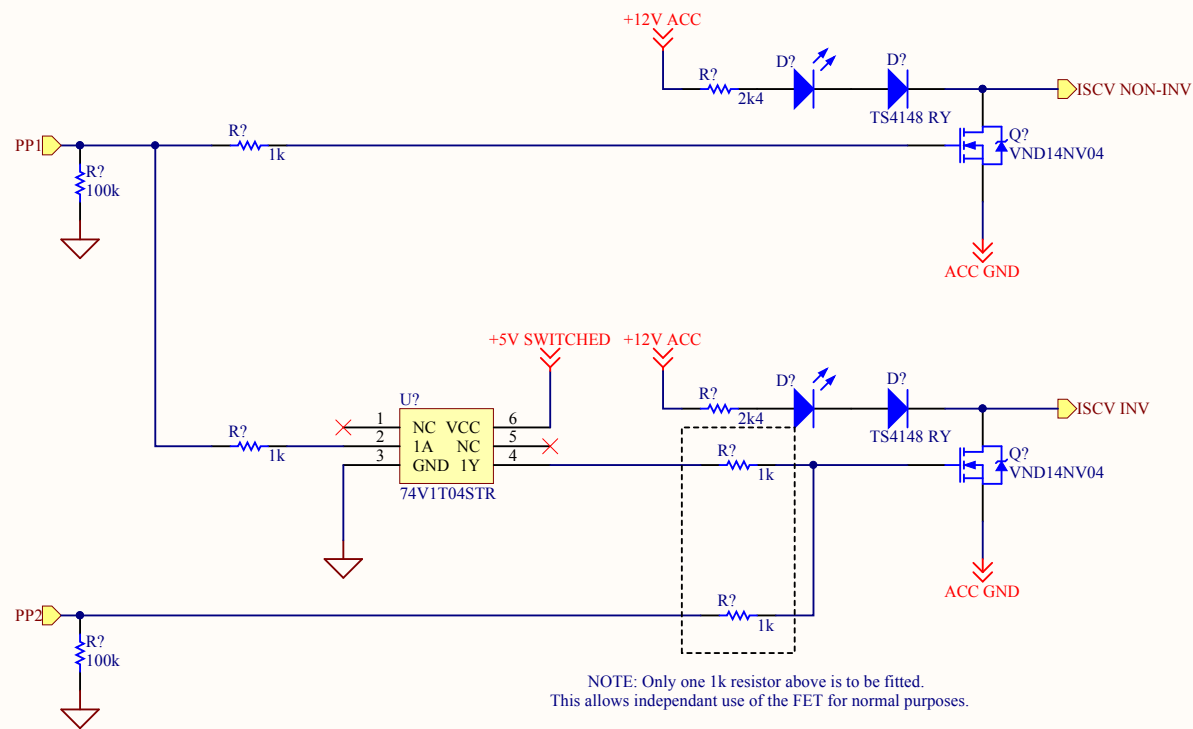

Title Ravage - 3-Wire ISCV Driver			Drawn By: <i>Dan Visser</i>	
Size: A4	Number: A	Revision: 0.2		
Date: 9/02/2013	Time: 9:58:34 AM	Sheet 13 of 16		



Title Ravage - SD Card Interface			Drawn By: Dan Visser	
Size: A4	Number: A	Revision: 0.2		
Date: 9/02/2013	Time: 9:58:34 AM	Sheet 14 of 16		

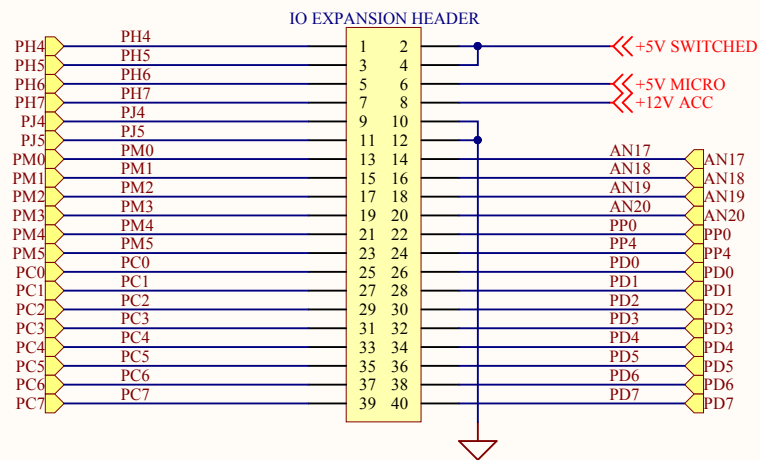

NOTE: L and M pins are rated at 12A max, with remaining pins rated at 6A max.

