

CYCLOPROP | CP-RB-001 | REV B | PROTOTYPE


NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Assem20_Design_RevB

MODEL SHA256: 24fbac52556632b0a794587b492d25e20c1d3071da5448a9377b8fa3d0b671e3

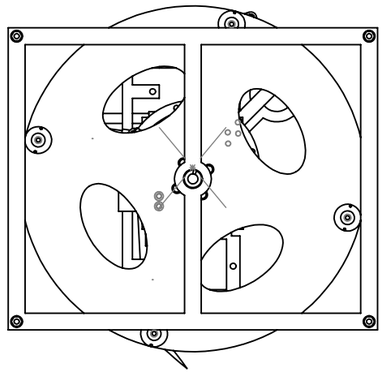

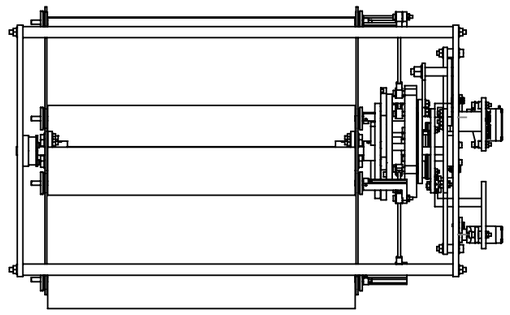

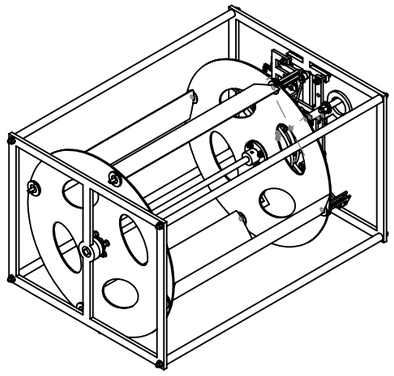

DIMENSION / INTERFACE DEFINITION PROTOTYPE BENCH ASSEMBLY; no fabrication/operating release. Four NACA0012-intent Part1 blades, span220, chord38, pivot9.5; rotor pitch radius95. Eight retained F693ZZ-envelope cartridges. Blade nominal endfloat0.40total, centred0.20each side. Two hub shims0.65 preserve blade/shaft stations. Four rod centre distances56.526653; carbon-tube cut length46.526653. Eight capped spherical joints and four arm crosspins installed. Physical Oldham ring timing, neutral phase-15.8253856deg relative blade radial stations; prototype pitch approximately-34.9897 to+34.9911deg nominal. RELEASE HOLD: coupling play exceeds nominal pitch margin; loaded35degree compliance and continuous moving clearances unverified. SERVO SCREEN FAILED: present Xservo inertia-only requirement0.280Nm exceeds published0.216Nm at6V. Replacement/redesign and approved loads required. MASS: native reference sum about1.11kg; blade, rails and bearing assumptions prevent a measured-hardware claim. See REVISED_NATIVE_MATERIAL_BOM.csv. Rotor/ring setup holds suppressed; axis and radial travel limits restored. Saved nominal pose preserved. Further free-motion verification remains a release hold. Assembly order, tolerance/fit register and physical verification plan are separate controlled review inputs. No aerodynamic/structural certification claimed.

DO NOT SCALE. Individual model-view scales may differ. Nominal dimensions in mm. Release holds apply: fits, loaded clearances, locking, fatigue and supplied material. Thread solids show major envelopes; DO NOT use as tap-drill sizes.

SOLIDWORKS Educational Product. For Instructional Use Only.