

CYCLOPROP | CP-RB-108 | REV B | PROTOTYPE


NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Ball_Socket_Threaded_Retaining_Cap_PROTOTYPE

MODEL SHA256: 77f4411f89bf14dae7984f4784ed59b36551ef5137c6f48bf65a634509aff28b

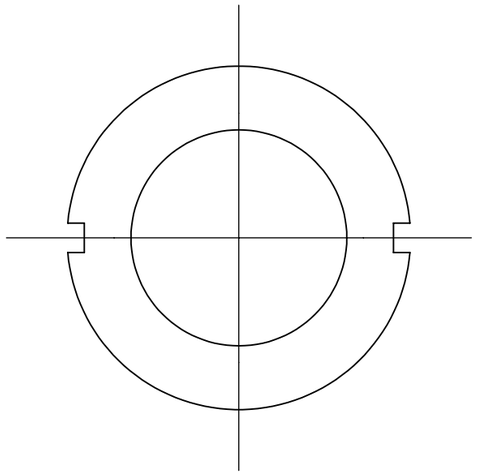



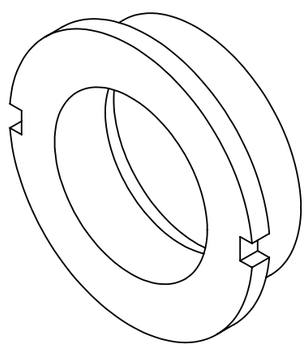

DO NOT SCALE. Individual model-view scales may differ. Nominal dimensions in mm.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

DIMENSION / INTERFACE DEFINITION

MATERIAL: machined7075-T6, proposed. Quantity8.
DATUM A: flange underside. DATUM B: thread axis. Ball centre lies2.20 belowA onB.
Flange OD7.00; thickness0.50 aboveA. Male thread major OD6.00; length1.40 belowA.
External thread M6x0.35. Thread class/runout and tool clearance require release; native model is a major envelope.
Spherical seat diameter5.05, concentric with the specified ball centre. Through mouth diameter4.40.
Two diametrically opposed tool notches: width0.60, radial depth0.35, through flange0.50. Notch centre plane throughB.
Match to D5.00 ball and mating female-thread socket body. Open cap to insert ball; seat flange on body top.
HOLD: qualify spherical fit/finish/lubrication, thin thread geometry, tightening torque and anti-loosening.
HOLD: pullout, wear and cyclic fatigue tests. No operating-speed release or physical results available.
Inspection: check free articulation after locking; verify ball cannot escape and rod centres remain56.526653 apart.

SOLIDWORKS Educational Product. For Instructional Use Only.