

CYCLOPROP | CP-RB-228 | REV B | PROTOTYPE

NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Endplate_Hub_Interface_RevA

MODEL SHA256: 2f9b5c7a55bd391f1272b3e97a744b38dfc3f204246c67c0f31973eb3c5577c6

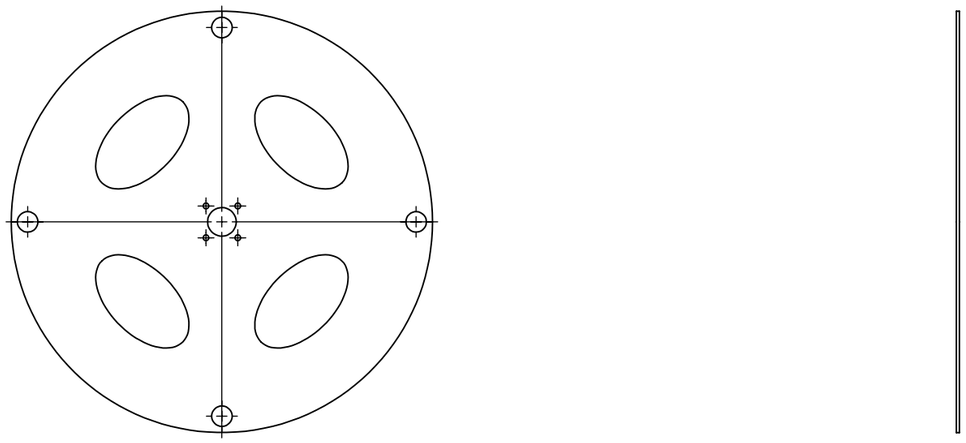



DO NOT SCALE. Individual model-view scales may differ. Nominal dimensions in mm.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

DIMENSION / INTERFACE DEFINITION

G10/FR4 sheet, nominal thickness1.50; OD206; centre bore14.00. Quantity2.
Four blade-cartridge holes D10.02 on PCD190, at90degree spacing. Hole axes parallel to rotor axis.
Four hub-bolt clearance holesD2.80 onPCD22, clocked45degrees from blade stations.
Four lightening cutouts: contour governed by referenced native model; manufacturing contour tolerances and edge finish need release.
Cartridge hole-to-outer-edge nominal ligament2.99mm. G10 clamp crushing, waterjet damage and fatigue require review.
Flatness, hole positional tolerance, perpendicularity and dynamic balance limits await release. No18g mass target override applies.

SOLIDWORKS Educational Product. For Instructional Use Only.