

CYCLOPROP | CP-RB-229 | REV B | PROTOTYPE


NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Blade_Pitch_Arm_Offset22p075_PROTOTYPE

MODEL SHA256: e0d89d44fe3d58e7391acbb8e027c670aaded872806eb85eb2ec74635d8f95bb



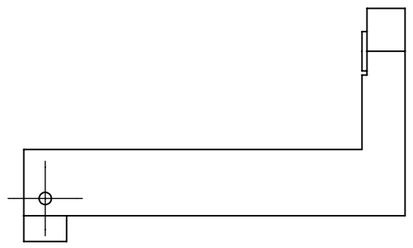

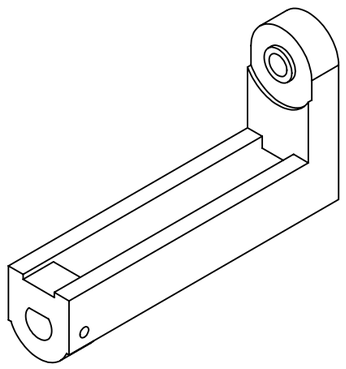

DIMENSION / INTERFACE DEFINITION

Machined7075-T6 proposed. Four identical offset arms.
Effective arm radius12.00; joint centre22.075 below arm datum.
Existing D3/D-flat trunnion interface retained.
Boss axial thickness3.50; positive pin crossholeD1 at boss axial midplane1.75, directed along arm localX.
Line-ream arm and METAL trunnion together to1.00..1.02; proposed ISO8750 standard-duty1x8 coiled pin. Actual press retention/fatigue approval required.
Joint recessOD8/ID3.2, depth0.40. Platform3.50, local recessed thickness3.10.
Twin-web, boss and fillet contours governed by referenced native model; combined stress/fatigue and finish/tolerance release pending.
Metal trunnion construction/bond to composite blade remains undefined. Do not drill unspecified CFRP as a steel journal.

DO NOT SCALE. Individual model-view scales may differ. Nominal dimensions in mm.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

SOLIDWORKS Educational Product. For Instructional Use Only.