

# CYCLOPROP | CP-RB-001 | REV B | PROTOTYPE


## NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Assem20_Design_RevB

MODEL SHA256: 8cfec4662ebbe2caa1c0a87ffbe5298dc36bcb8ab1ffc4c288106d8b1d0b9045

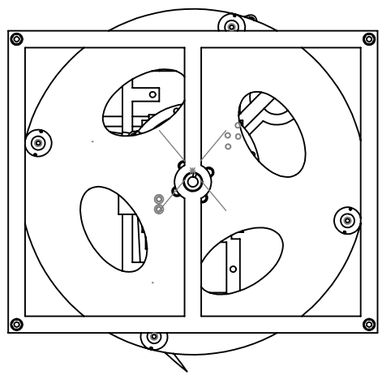

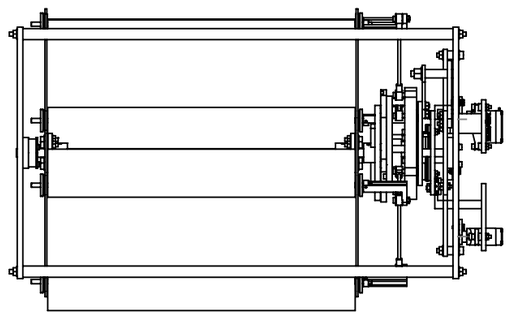

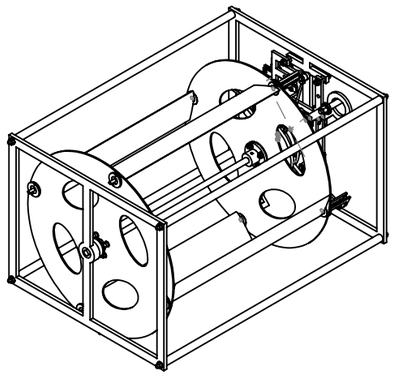

View scale 0.28:1. All dimensions nominal unless a limit is explicitly stated.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

DIMENSION / INTERFACE DEFINITION

PROTOTYPE BENCH ASSEMBLY; no fabrication/operating release.
Four NACA0012-intent Part1 blades, span220, chord38, pivot9.5; rotor pitch radius95.
Eight retained F693ZZ-envelope cartridges. Blade nominal endfloat0.40total, centred0.20each side. Two hub shims0.65 preserve blade/shaft stations.
Four rod centre distances56.526653; carbon-tube cut length46.526653.
Eight capped spherical joints and four arm crosspins installed.
Physical Oldham ring timing, neutral phase-15.8253856deg relative blade radial stations; prototype pitch approximately-34.9897 to+34.9911deg nominal.
RELEASE HOLD: coupling play exceeds nominal pitch margin; loaded35degree compliance and continuous moving clearances unverified.
SERVO SCREEN FAILED: present Xservo inertia-only requirement0.280Nm exceeds published0.216Nm at6V. Replacement/redesign and approved loads required.
MASS: native reference sum about1.11kg; blade, rails and bearing assumptions prevent a measured-hardware claim. See REVISED_NATIVE_MATERIAL_BOM.csv.
Current rotor setup angle remains a construction drive; XY setup distances retain saved pose. Usable travel/constraints require final consolidation.
Assembly order, tolerance/fit register and physical verification plan are separate controlled review inputs. No aerodynamic/structural certification claimed.

**SOLIDWORKS Educational Product. For Instructional Use Only.**