

CYCLOPROP | CP-RB-208 | REV B | PROTOTYPE


NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Lower_Bearing_Pedestal_R2_PROTOTYPE

MODEL SHA256: b7fadda78bfb949f1abc7ed0b473b0bb0874503c5696fde1c32c938425c72768



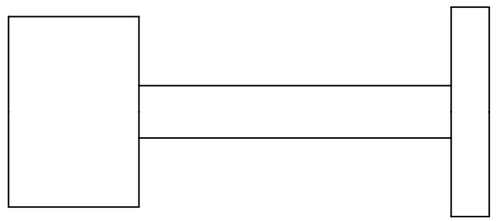

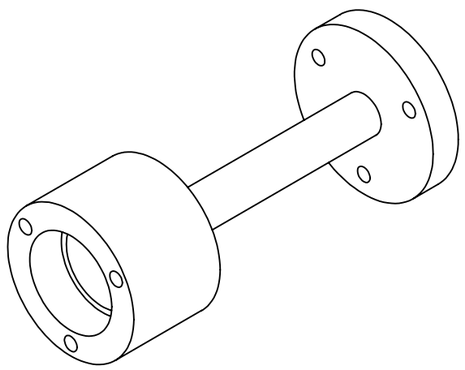

DIMENSION / INTERFACE DEFINITION

Quantity1. Assigned material: AISI 4340 Steel, normalized.
Turned4340 normalized reference: flangeOD22 Z-4..0, solidD5.5stem toZ32.8, OD20head, shaft/clip bore11.4 from35..41.5, bearingD13H7 seat41.5..46.5 with integral bottom shoulder.
D20.5 moving bores retain0.62mm nominal clearance at e6.88 before budgets.
Three M2x0.4 base blind threads full3.0/pilot3.6; top threads full4.0/pilot5.1.
CAD shows major diameter envelopes.
Root fillets, approved loads, fatigue, fit and heat-treatment certification remain holds.
RELEASE HOLD: supplied material, fits, finish, tolerances and approved loads/locking require review. Nominal thread envelopes are not tap-drill geometry.
Use model identified by SHA for referenced contour; this prototype inspection sheet does not release undimensioned manufacturing features.

View scale 1.584158415841584:1. All dimensions nominal unless a limit is explicitly stated.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

SOLIDWORKS Educational Product. For Instructional Use Only.