

CYCLOPROP | CP-RB-214 | REV B | PROTOTYPE


NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Oldham_Input_PROTOTYPE

MODEL SHA256: af9dae8ba203cda27d077effe4c6a3d284f7a604c0311ca75ebfaee0574e8c81

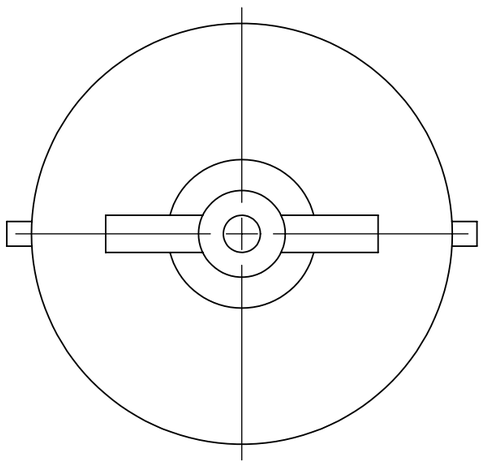





View scale 1.0526315789473684:1. All dimensions nominal unless a limit is explicitly stated.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

DIMENSION / INTERFACE DEFINITION

Quantity1. Assigned material: 7075-T6 (SN).
Input plateOD68 ID24 H4 atZ47.9; downward X tonguesW4 L10 H2.
Raised bridge, OD14 D6hub toZ60.0.
D2 crosspin atlocalZ8.6 (baseZ56.5) gives positive shaft torque and axial retention.
Pin clock angle is set in shaft drill feature; manufacture using assembly datum. 7075-T6 proposed; shaft crosshole fatigue, pin strength and assembly access require verification.
RELEASE HOLD: supplied material, fits, finish, tolerances and approved loads/locking require review. Nominal thread envelopes are not tap-drill geometry.
Use model identified by SHA for referenced contour; this prototype inspection sheet does not release undimensioned manufacturing features.

SOLIDWORKS Educational Product. For Instructional Use Only.