
# CYCLOPROP | CP-RB-215 | REV B | PROTOTYPE

## NOT RELEASED FOR FABRICATION - NOMINAL DIMENSIONS IN mm

MODEL: RB_Oldham_Output_Pilot_Standoff_L9

MODEL SHA256: 96ab51e470bd16aba78f958647a3159bd53ba4ab737cc6946a0357b888b36d09

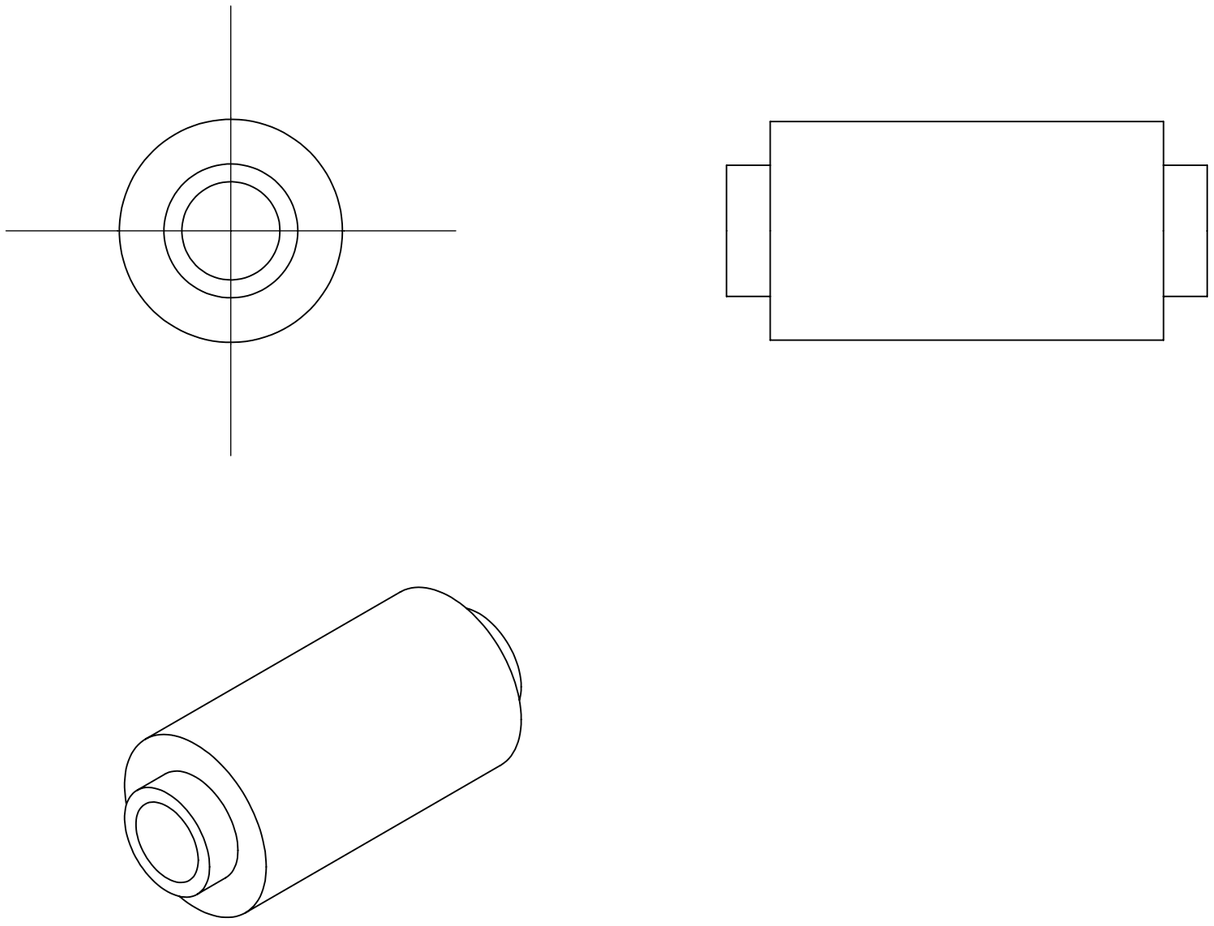

View scale 7.272727272727273:1. All dimensions nominal unless a limit is explicitly stated.
Release holds apply: fits, loaded clearances, locking, fatigue and supplied material.
Thread solids show major envelopes; DO NOT use as tap-drill sizes.

DIMENSION / INTERFACE DEFINITION

Quantity4. Assigned material: AISI 4340 Steel, normalized.
Four shouldered steel torque spacers: bodyOD5 ID2.2 L9 with OD3 x1 pilots both ends.
Ring/output pocketsD3.02 depth1.1 leave0.1 tip clearance, shoulders define9mm spacing.
Pilot fit/backlash and screw preload require release; normalized4340 proposed.
RELEASE HOLD: supplied material, fits, finish, tolerances and approved loads/locking require review. Nominal thread envelopes are not tap-drill geometry.
Use model identified by SHA for referenced contour; this prototype inspection sheet does not release undimensioned manufacturing features.

**SOLIDWORKS Educational Product. For Instructional Use Only.**