

Optimal Sensor Fusion using \mathcal{H}_∞ methods Synthesizing Complementary Filters for Active Seismic Noise Isolation Systems in KAGRA

Terrence T.L. Tsang on behalf of the KAGRA Collaboration

The Chinese University of Hong Kong. Email: ttltsang@link.cuhk.edu.hk

Introduction: Vibration Isolation Systems and Complementary Filters

Ground-based gravitational-wave detectors require vibration isolation systems (Fig. 1) to attenuate seismic noise induced displacement for the interferometer main optics. Vibration isolation systems utilize local displacement sensors for feedback control to achieve active isolation at lower frequencies. The control performance is limited by the sensors, so it's desirable for sensors to be as low-noise as possible. In this work, we will describe a sensor fusion architecture that combines two sensors with different noise characteristics to obtain a virtual "super sensor" that has overall better noise performance.

Complementary filters are applied on the sensors and the readout signals are then summed to become the readout of the super sensor. Complementary filter designs were proposed previously [2, 3, 4], but were arguably suboptimal. Also, besides heuristics, it was not clear how exactly the filter shapes were constrained according to the sensor noises in question. Therefore, we propose to formulate the complementary filter problem as an \mathcal{H}_∞ optimization problem and synthesize the filters, which optimally combine the sensors, using \mathcal{H}_∞ method.

Methodology: Complementary Filter Problem as an \mathcal{H}_∞ Problem

Fig. 2 shows a the block diagram typical two-sensor sensor fusion configuration using complementary filters. The two sensors are each filtered with filters $H_1(s)$ and $H_2(s)$ respectively. We required that the super sensor measuring the same signal that the two sensors are reading, so the filters must be complementary, i.e.

$$H_1(s) + H_2(s) = 1. \quad (1)$$

The super sensor noise then reads

$$N_{\text{super}}(s) = H_1(s)N_1(s) + H_2(s)N_2(s). \quad (2)$$

So, the goal is to design the complementary filters $H_1(s)$ and $H_2(s)$ such that $N_{\text{super}}(s)$ is minimized in some sense, or exhibit desirable noise characteristics.

\mathcal{H}_∞ method is used to synthesize regulator for feedback systems but is recently proposed for synthesizing complementary filters with frequency-dependent specifications [5]. And, it was shown that the method successfully reproduced one of the complementary filters at LIGO [6] using the same specifications. To use \mathcal{H}_∞ method, the input-output system is first represented in the generalized plant

representation as shown in Fig. 3. w are the inputs, z are the error signals to be minimized, u are the manipulated variables, v are the measurement signals, $\mathbf{P}(s)$ is the open loop plant, and $\mathbf{K}(s)$ is the closed-loop regulator. The close-loop response can be written as

$$z = \mathbf{G}(s)w, \quad (3)$$

where $\mathbf{G}(s)$ is the transfer function matrix from the inputs w to the errors z . \mathcal{H}_∞ synthesis will then generate a regulator, which minimizes the \mathcal{H}_∞ norm of the closed-loop transfer function $\mathbf{G}(s)$. For readers who are interested in the interpretation of the \mathcal{H}_∞ norm, please refer to external resources such as [5, 7].

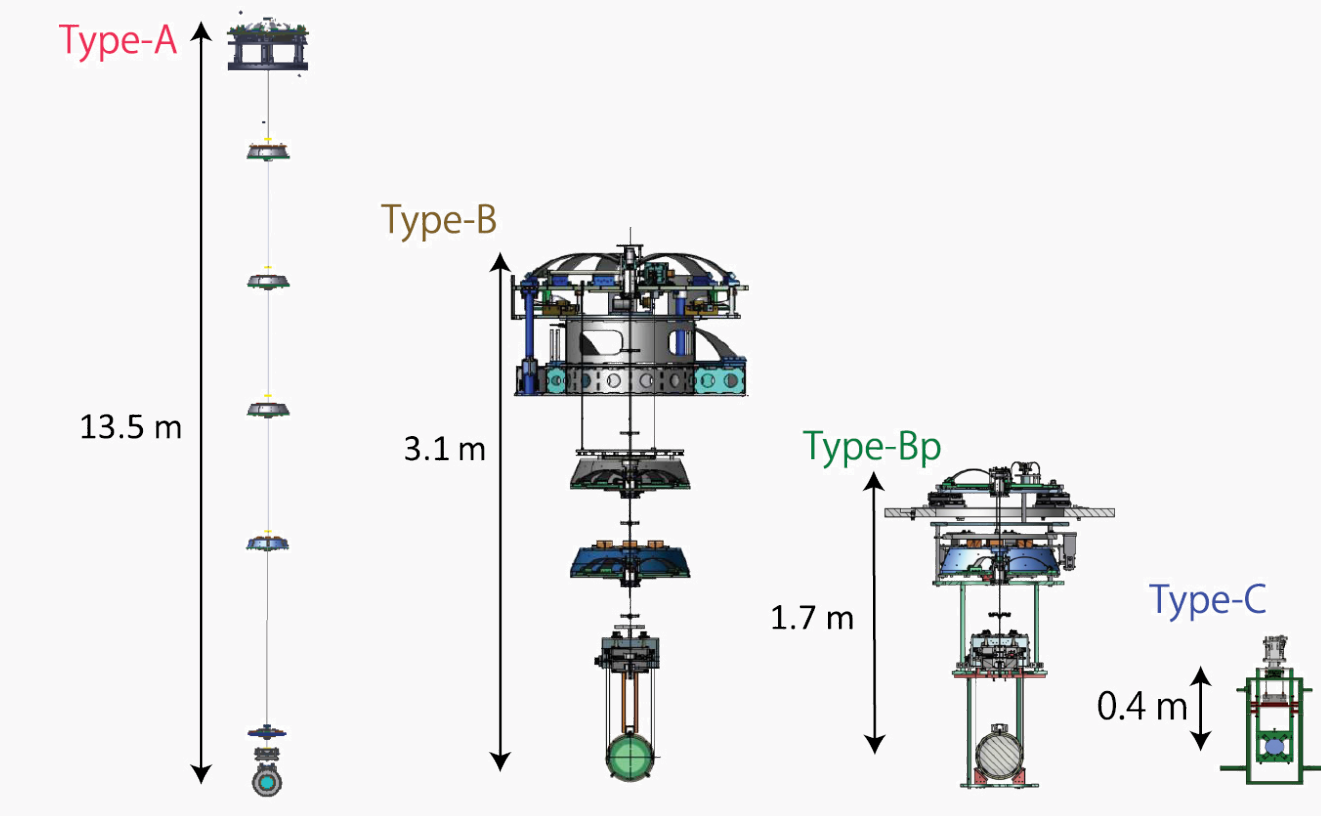


Figure 1: Type-A suspensions: input/end test masses, Type-B suspensions: beamsplitter and signal-recycling mirrors, Type-Bp suspensions: power-recycling mirrors, and Type-C suspensions: input/output mode cleaners [1].

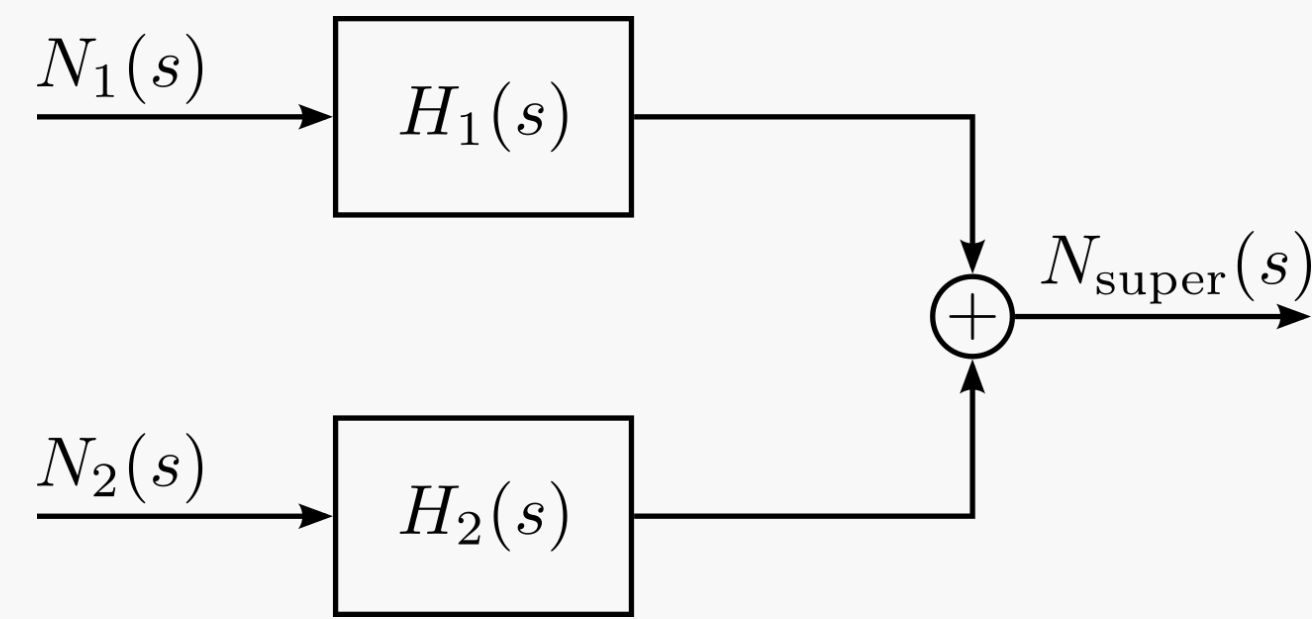


Figure 2: Two-sensor complementary filter configuration.

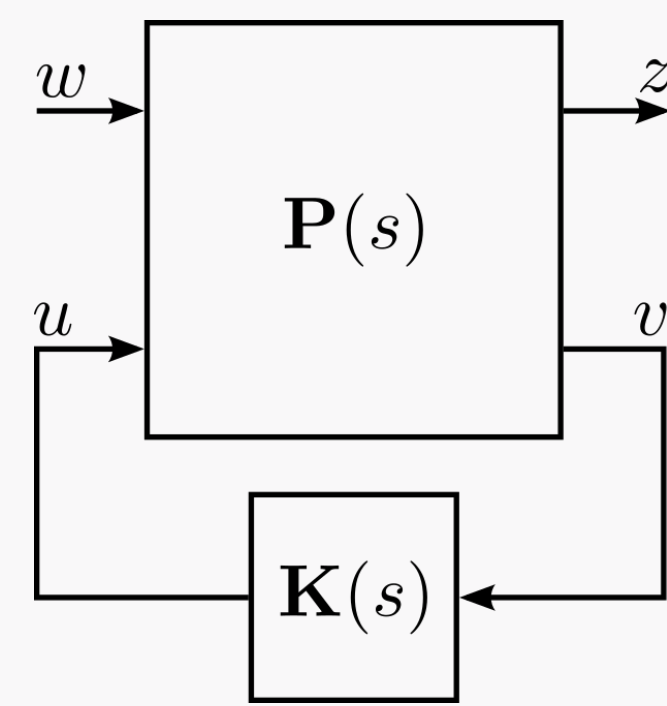


Figure 3: Generalized Plant Representation

Methodology: Complementary Filter Problem as an \mathcal{H}_∞ Problem (cont.)

Consider the generalized plant architecture as shown in Fig. 4, which is a slight modification from that of [5]. Here, Φ_1 and Φ_2 are some uncorrelated stochastic processes with unit magnitude. $\hat{N}_1(s)$ and $\hat{N}_2(s)$ are transfer function models of the noises N_1 and N_2 . $W_1(s)$ and $W_2(s)$ are some weighting functions, which can be used to specify the (inverse) frequency-dependent specification of the sensing noises N_1 and N_2 respectively.

Minimizing the \mathcal{H}_∞ norm of this plant will give optimal filters $H_1(s)$ and $H_2(s) \equiv 1 - H_1(s)$ that best filter the noises N_1 and N_2 according to the specifications. It follows that, by setting $W_1(s) = 1/\hat{N}_1(s)$ and $W_2(s) = 1/\hat{N}_2(s)$, the requirements of N_1 is set to N_2 when $N_1 \gg N_2$, and vice versa. These weights are reasonable specifications if there's no specific requirements for the sensing noises because over-suppressing one of the noises is not useful, i.e. there exists a lower bound defined by the either N_1 or N_2 , whichever is lower.

Results: Synthesizing Complementary Filters for SRM in KAGRA

The proposed method is exemplified with sensing noises taken from the preisolator of the signal-recycling mirror (SRM) in KAGRA. The complementary filters previously designed in [2, 3] is also compared with that synthesized by the proposed method.

The amplitude spectral densities (ASDs) of the sensing noises N_1 and N_2 and the transfer function models $\hat{N}_1(s)$ and $\hat{N}_2(s)$ are shown in Fig. 5. Here, N_1 denotes quadrature sum of the relative displacement sensor (LVDT) self-noise and the mean seismic noise at KAGRA taken from [8], whereas N_2 is the geophone self-noise.

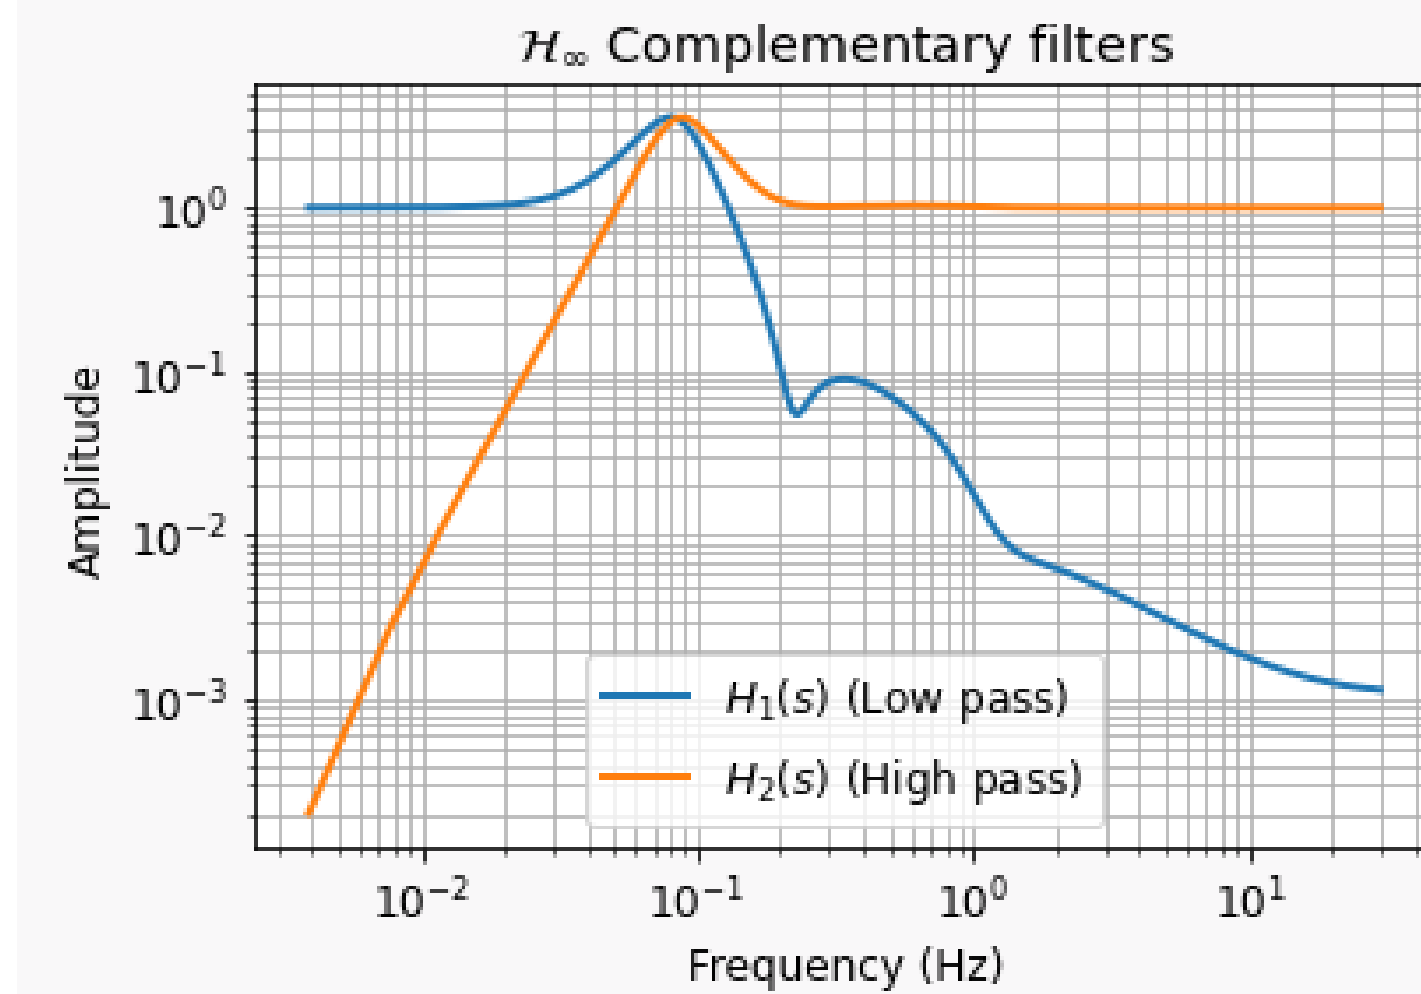


Figure 6: Filters synthesized using \mathcal{H}_∞ method.

With the noise models $\hat{N}_1(s)$ and $\hat{N}_2(s)$, complementary filters were synthesized using \mathcal{H}_∞ method with no information other than the sensing noises themselves. The resulting complementary filters are shown in Fig. 6.

Fig. 7 shows the predicted super sensor noise (in green) defined by

$$\left| \hat{N}_{\text{super}}(j\omega) \right| = \left[|H_1(j\omega)|^2 \left| \hat{N}_1(j\omega) \right|^2 + |H_2(j\omega)|^2 \left| \hat{N}_2(j\omega) \right|^2 \right]^{\frac{1}{2}}. \quad (4)$$

The super sensor noise here follows the shape of the lower bound of the sensing noises at all frequencies, which would indicate that the order of roll-off is critical at all frequencies.

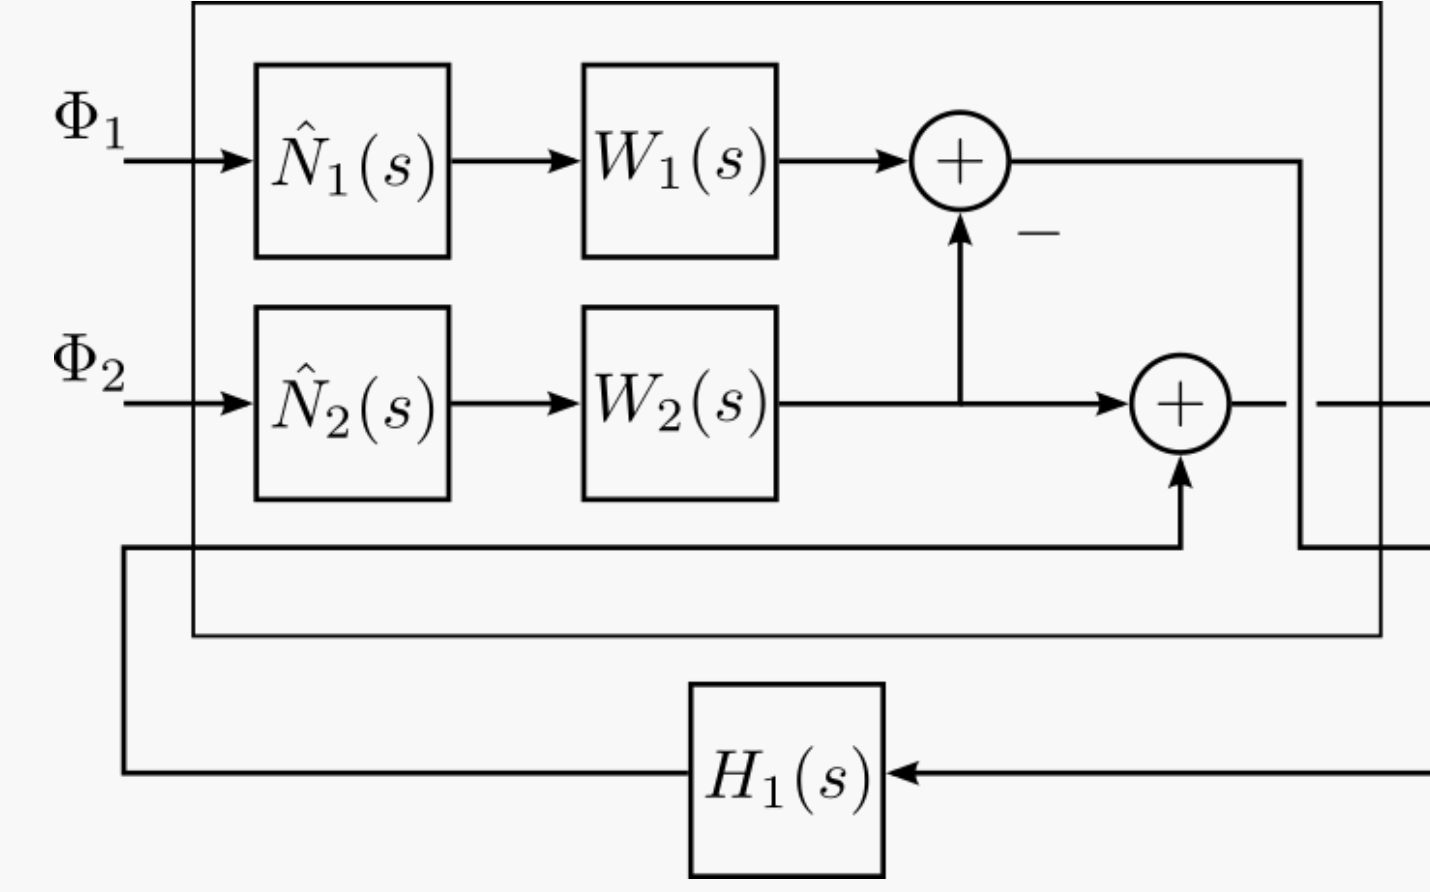


Figure 4: Generalized plant representation for complementary filter synthesis.

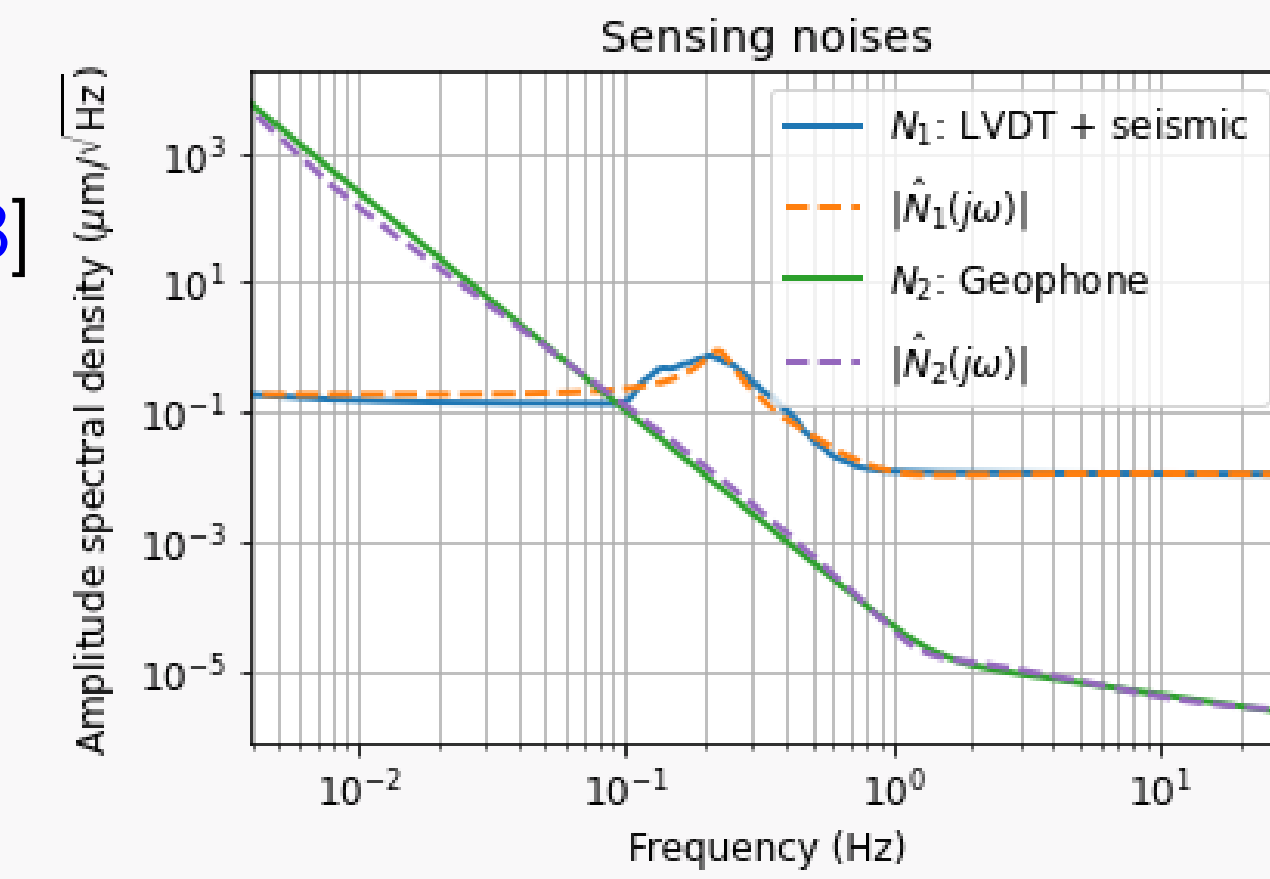


Figure 5: Sensing noises of the SRM preisolator sensors.

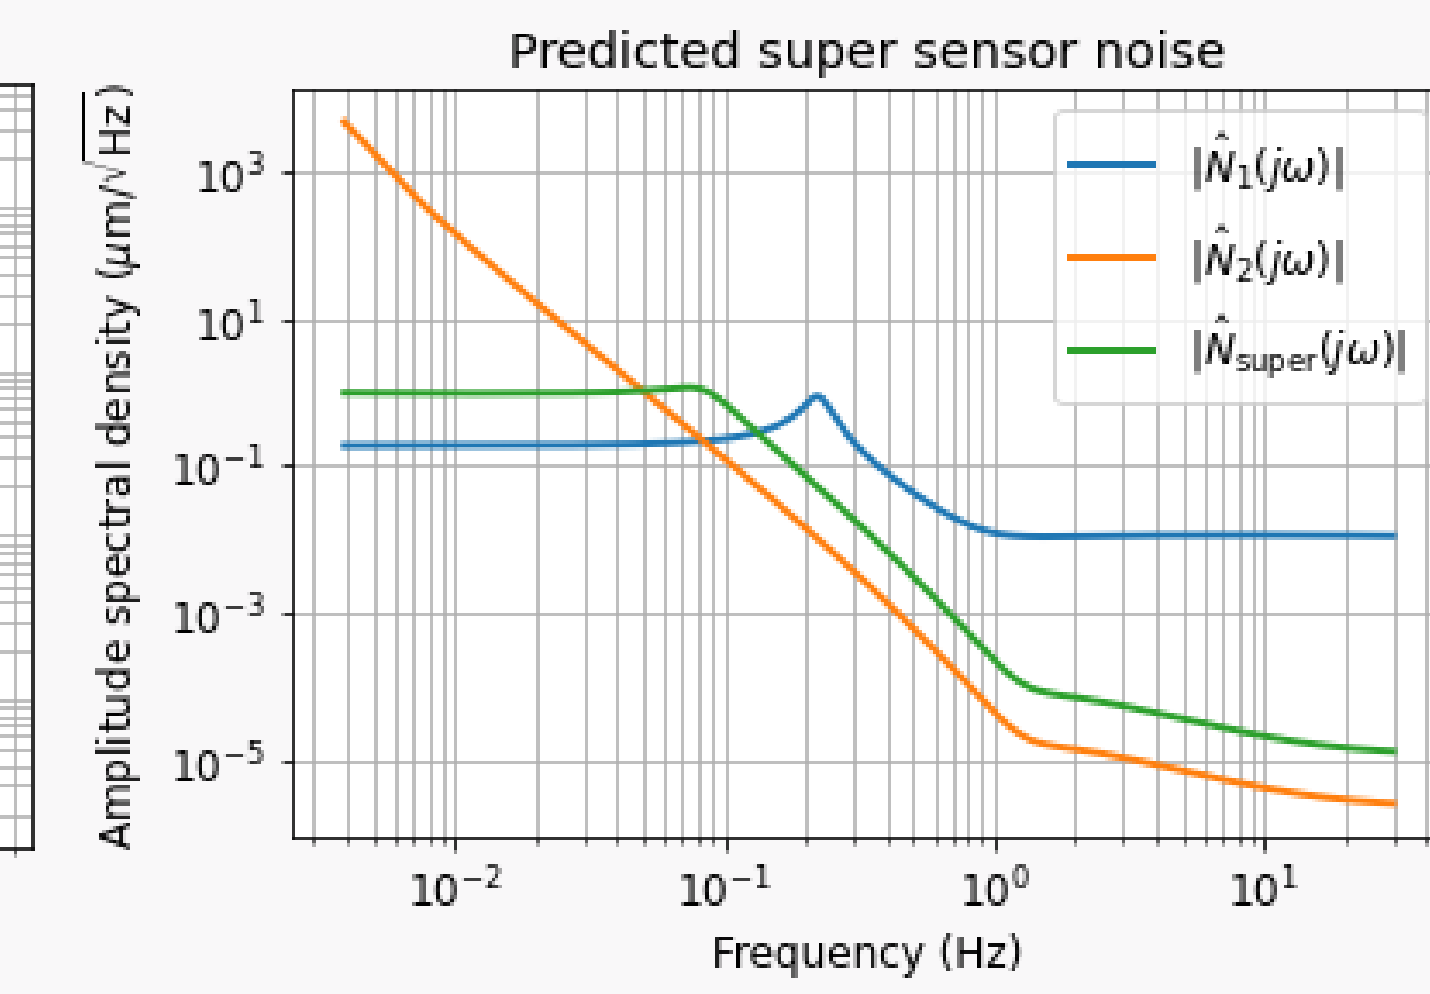


Figure 7: Predicted super sensor noise

Results: Synthesizing Complementary Filters for SRM in KAGRA (Cont.)

In Fig. 8, we compare noise performance of the complementary filters from [2], [3], and the proposed method, which are denoted $N_{\text{super}, 1}$, $N_{\text{super}, 2}$, and $N_{\text{super}, \mathcal{H}_\infty}$ respectively. The super sensor noises were calculated directly using the noises N_1 and N_2 , instead of the transfer function models, as shown in Fig. 5.

The cross-over frequency of the filters in [2, 3] were set to be the cross-over frequency of the sensing noises in Fig. 5, which is 0.0898 Hz in this case, as recommended in [2]. The amplitude spectral density of the super sensor noise from \mathcal{H}_∞ filters are on par, if not lower, compared to the other two below 0.4 Hz but is slightly higher at higher frequencies. The shape of $N_{\text{super}, \mathcal{H}_\infty}$ at higher frequencies still follows that of the lower bound, which again, indicating that the sensing noises are critically roll-offed.

Performance indices are compared in table. 1, including the super sensor noises' RMS (overall noise performance), the band-limited RMS around 0.1 to 0.5 Hz (seismic noise attenuation performance at microseism), and the ASD at 10 Hz (potential feedback control limit).

	RMS (μm)	RMS (0.1-0.5 Hz) (μm)	ASD (10Hz) ($\mu\text{m}/\sqrt{\text{Hz}}$)
$N_{\text{super}, 1}$	0.5895	0.2400	4.443e-6
$N_{\text{super}, 2}$	0.4726	0.1650	4.443e-6
$N_{\text{super}, \mathcal{H}_\infty}$	0.3631	0.1041	2.087e-5
Lower bound	0.0462	0.01422	4.443e-6

Table 1: RMS, band-limited RMS, and ASD values at 10 Hz of the super sensor noises predicted using filter design from [2, 3] and the proposed method (**lower the better**).

The \mathcal{H}_∞ complementary filters performs better than the other two complementary filters in terms of RMS value especially at the microseism band, which makes it a better candidate for active seismic noise isolation. While it performs worse at 10 Hz, there's still a 3 orders of magnitude reduction compared to that of the LVDT self-noise ($\approx 10^{-2} \mu\text{m}/\sqrt{\text{Hz}}$).

Conclusion

- The complementary filter problem was formulated as an \mathcal{H}_∞ optimization problem.
- Complementary filters can be synthesized using \mathcal{H}_∞ method with no other information other than the sensing noises themselves.
- The method was exemplified using SRM preisolator sensors and is able to generate filters that better reduce the RMS of the super sensor noise especially around the microseism band.
- While the \mathcal{H}_∞ filters perform worse at 10 Hz, 3 orders of magnitude reduction in super sensor noise ASD (compared to LVDT) can still be achieved.

References

- [1] T. Akutsu et al. Vibration isolation systems for the beam splitter and signal recycling mirrors of the KAGRA gravitational wave detector. *Class. Quant. Grav.*, 38(6):065011, 2021.
- [2] T. Sekiguchi. *Study of Low Frequency Vibration Isolation System for Large Scale Gravitational Wave Detectors*. PhD thesis, Tokyo U., 2016.
- [3] Joris Vincent van Heijningen. *Turn up the bass! Low-frequency performance improvement of seismic attenuation systems and vibration sensors for next generation gravitational wave detectors*. PhD thesis, Vrije U., Amsterdam, 2018.
- [4] Lucia Trozzo. *Low Frequency Optimization and Performance of Advanced Virgo Seismic Isolation System*. PhD thesis, Università degli Studi di Siena, 2018.
- [5] Thomas Dehaeze, Verma Mohit, and Christophe Collette. Complementary filters shaping using \mathcal{H}_∞ synthesis. pages 459–464, 11 2019.
- [6] Fabrice Matichard et al. Seismic isolation of Advanced LIGO: Review of strategy, instrumentation and performance. *Classical and Quantum Gravity*, 32, 02 2015.
- [7] Sigurd Skogestad and I Postlethwaite. *Multivariable Feedback Control: Analysis and Design*, volume 2. 01 2005.
- [8] Kouseki Miyo. Seismic noise of kagra mine. KAGRA internal document JGW-T1910436.