





## MAIN PROGRAM

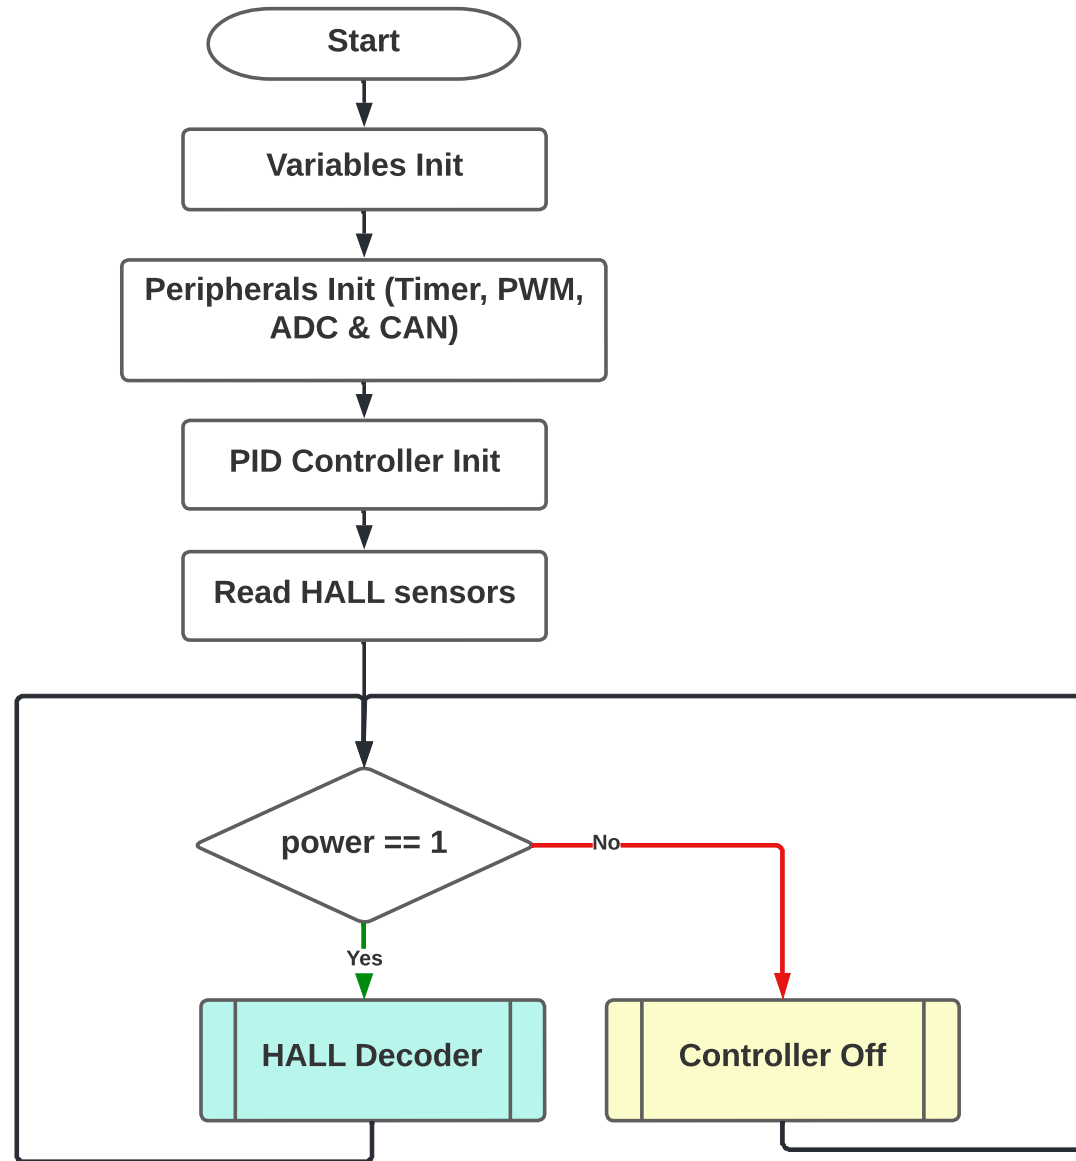

## HALL Decoder Subroutine

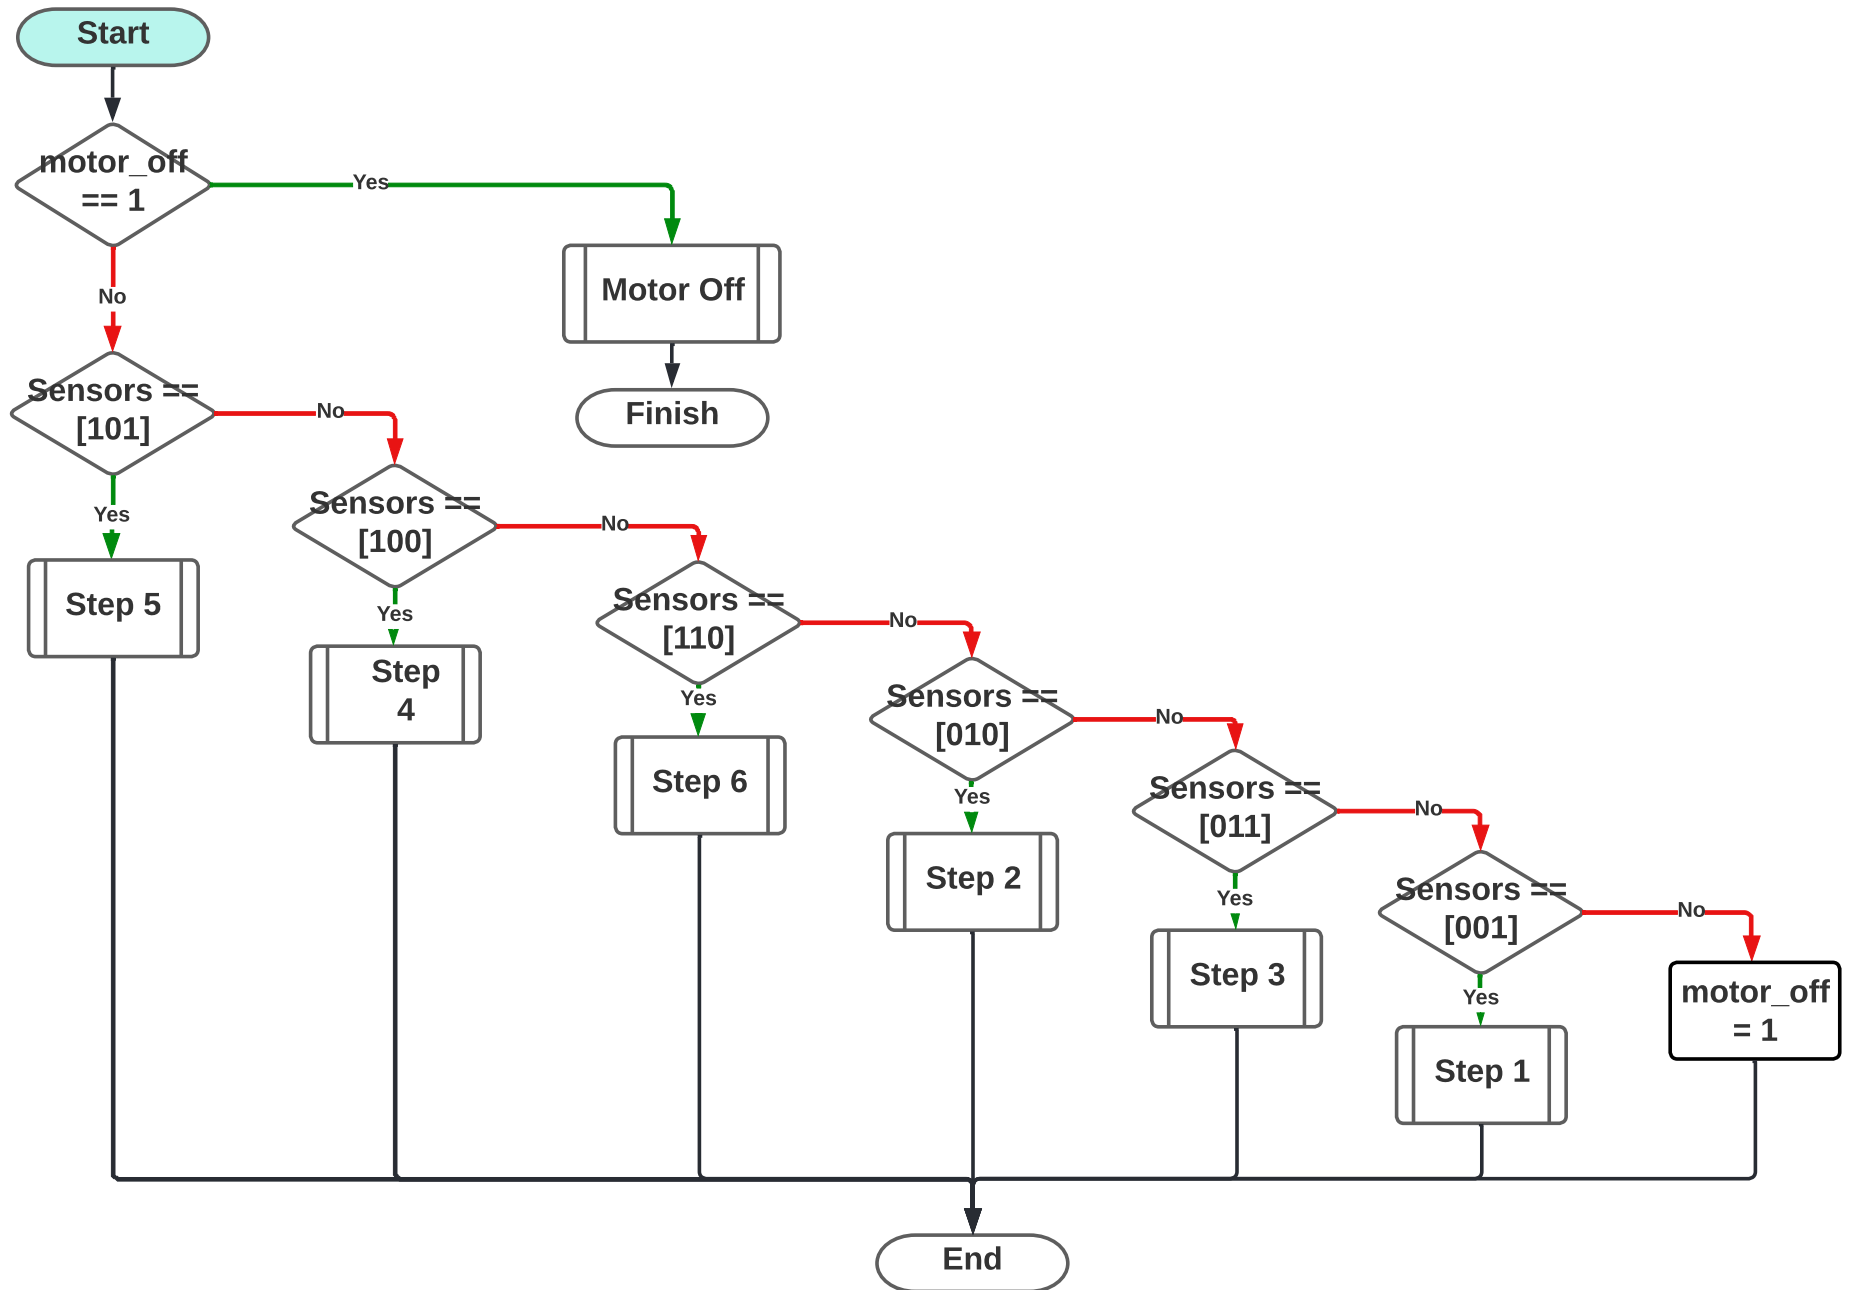

## *Interrupt routines*

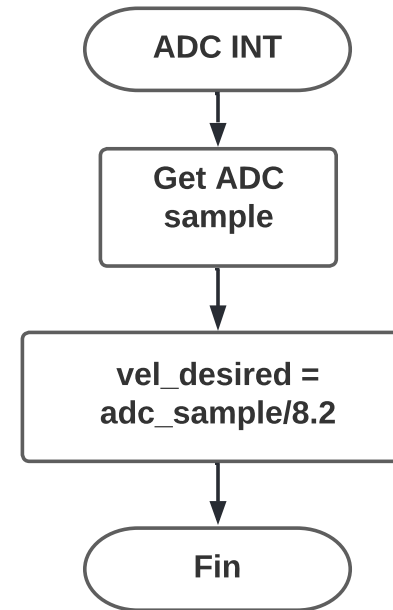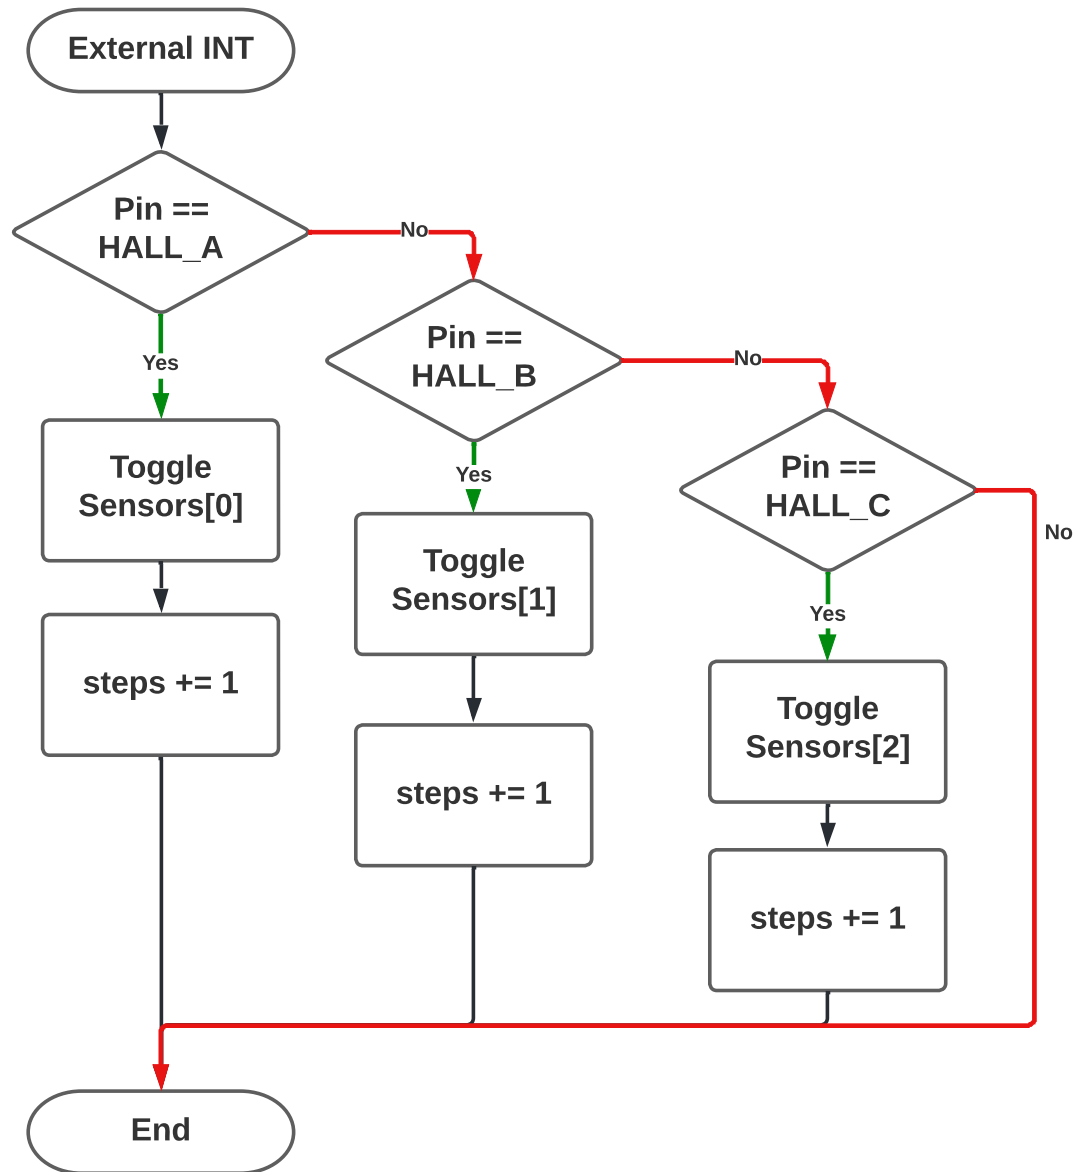

\* 8.2 is the factor to convert 12 bits adc to 0-500 rpm

