


外形尺寸(CAD)DIMENSIONS

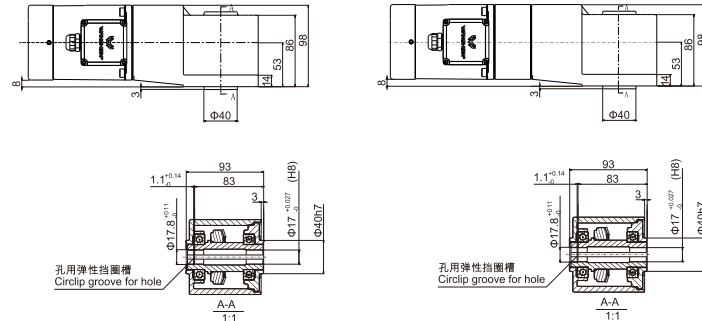

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL	最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE 1200r/min 90r/min	运行电容 RUNNING CAPACITOR
齿轮轴 GEAR SHAFT 90YS90GV11 90YR90GV11 90YT90GV11 90YB90GV11 90YF90GV11	90	Single phase 单相 110	50Hz	1.70	90-1300	525	710 200	20μf/250V
圆轴 ROUND SHAFT 90YS90DV11 90YR90DV11 90YT90DV11 90YB90DV11 90YF90DV11	90		60Hz	1.50	90-1600	420	710 200	
齿轮轴 GEAR SHAFT 90YS90GV22 90YR90GV22 90YT90GV22 90YB90GV22 90YF90GV22	90	Single phase 单相 220	50Hz	0.95	90-1300	525	710 200	5μf/450V
圆轴 ROUND SHAFT 90YS90DV22 90YR90DV22 90YT90DV22 90YB90DV22 90YF90DV22	90		60Hz	0.86	90-1600	420	710 200	
齿轮轴 GEAR SHAFT 90YS90GY22 90YB90GY22	90	Three phase 三相 220	50Hz	0.69	90-1300	910	700	
圆轴 ROUND SHAFT 90YS90DY22 90YB90DY22	90		60Hz	0.63	90-1600	730	560	
齿轮轴 GEAR SHAFT 90YS90GY38 90YB90GY38	90	Three phase 三相 380	50Hz	0.41	90-1300	910	700	
圆轴 ROUND SHAFT 90YS90DY38 90YB90DY38	90		60Hz	0.38	90-1600	730	560	

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL	最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE 1200r/min 90r/min	运行电容 RUNNING CAPACITOR
齿轮轴 GEAR SHAFT 90YS120GV11 90YR120GV11 90YT120GV11 90YB120GV11 90YF120GV11	120	Single phase 单相 110	50Hz	2.04	90-1300	720	840 300	24μf/250V
圆轴 ROUND SHAFT 90YS120DV11 90YR120DV11 90YT120DV11 90YB120DV11 90YF120DV11	120		60Hz	1.84	90-1600	600	840 300	
齿轮轴 GEAR SHAFT 90YS120GV22 90YR120GV22 90YT120GV22 90YB120GV22 90YF120GV22	120	Single phase 单相 220	50Hz	1.02	90-1300	720	840 300	6μf/450V
圆轴 ROUND SHAFT 90YS120DV22 90YR120DV22 90YT120DV22 90YB120DV22 90YF120DV22	120		60Hz	0.92	90-1600	600	840 300	
齿轮轴 GEAR SHAFT 90YS120GY22 90YB120GY22	120	Three phase 三相 220	50Hz	0.89	90-1300	1195	924	
圆轴 ROUND SHAFT 90YS120DY22 90YB120DY22	120		60Hz	0.81	90-1600	1014	750	
齿轮轴 GEAR SHAFT 90YS120GY38 90YB120GY38	120	Three phase 三相 380	50Hz	0.51	90-1300	1195	924	
圆轴 ROUND SHAFT 90YS120GY38 90YB120GY38	120		60Hz	0.45	90-1600	1014	750	

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

減速箱減速比性能對照表 REDUCTION RATIO PERFORMANCE CHART

減速比 REDUCTION RATIO		3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
90W 50Hz	最高轉速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
	額定轉矩N·m Rated torque	1.79	2.14	2.98	3.57	4.46	5.29	6.61	7.93	9.52	10.58	12.07	14.48
60Hz	最高轉速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
	額定轉矩N·m Rated torque	1.49	1.79	2.48	2.98	3.72	4.41	5.51	6.61	7.93	8.82	10.06	12.07
120W 50Hz	最高轉速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
	額定轉矩N·m Rated torque	2.25	2.70	3.75	4.50	5.62	6.88	8.60	10.31	12.38	13.75	15.43	18.51
60Hz	最高轉速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
	額定轉矩N·m Rated torque	1.87	2.25	3.12	3.75	4.68	5.73	7.16	8.60	10.31	11.46	12.86	15.43
減速比 REDUCTION RATIO		36	40	50	60	75	90	100	120	150	180	200	
90W 50Hz	最高轉速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
	額定轉矩N·m Rated torque	17.38	19.31	20	20	20	20	20	20	20	20	20	
60Hz	最高轉速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
	額定轉矩N·m Rated torque	14.48	16.09	20	20	20	20	20	20	20	20	20	
120W 50Hz	最高轉速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
	額定轉矩N·m Rated torque	20	20	20	20	20	20	20	20	20	20	20	
60Hz	最高轉速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
	額定轉矩N·m Rated torque	18.51	20	20	20	20	20	20	20	20	20	20	

- 表中轉速是以電機的平均轉速(50Hz:1300r/min, 60Hz:1600r/min)為基數除以減速比而算出的數值。
- 實際轉速將隨負載大小而少量變化, 變化範圍為±8%左右。
- The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.
- The actual speed changes according to the load (±8%).



減速箱型號中的□為減速比的數值


速比: 1:3~200; 中間減速箱: (1:10)

□ in gearbox model indicates the reduction ratio (1:3~200); MIDDLE GEARBOX: (1:10)

外形尺寸 (CAD) DIMENSIONS

90/120YS/YR/YT/YB/YF01


圓軸電箱 重量:3kg
Round-axis motor, weight:3kg

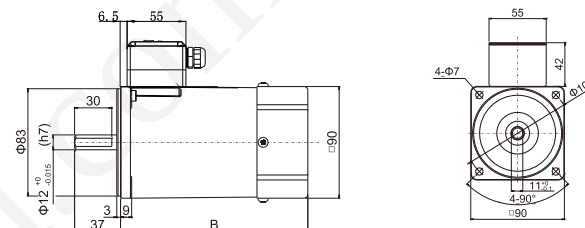

序號 No.	電機類型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

90/120YS/YR/YT/YB/YF02


組合:電機+標準減速機(減速比:1:3~200) 重量:4.2kg
Combination: motor+standard gearbox (reduction ratio:1:3~200), weight:4.2kg

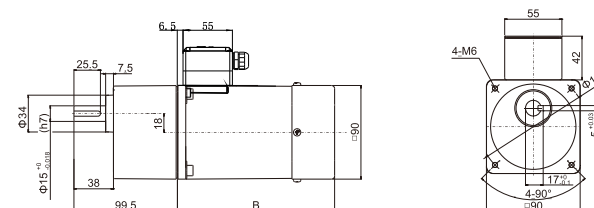

序號 No.	電機類型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

90/120YS/YR/YT/YB/YF03

組合:電機+中間減速箱+標準減速機(減速比:1:200~1800) 重量:5.1kg
Combination: motor+intermediate gearbox+standard gearbox (reduction ratio:1:200~1800), weight:5.1kg

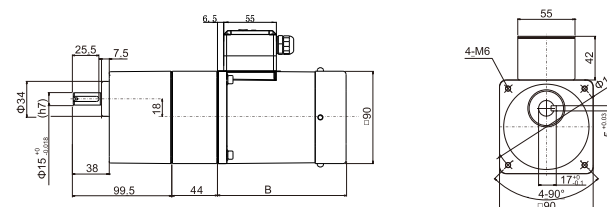


序號 No.	電機類型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

外形尺寸 (CAD) DIMENSIONS

90/120YS/YR/YT/YB/YF04


组合:电机+带耳减速箱(减速比:1:3~200) 重量:4.2kg
Combination: motor+eared gear (reduction ratio: 1:3~200), weight: 4.2kg

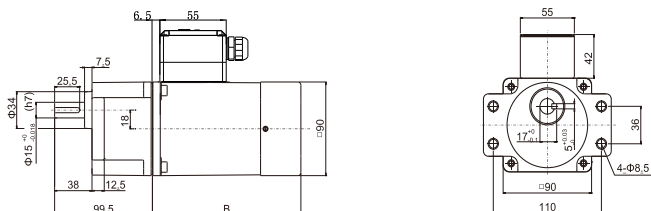

序号 No.	电机类型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

90/120YS/YR/YT/YB/YF05


组合:电机+中间减速箱+带耳减速箱(减速比:1:200~1800) 重量:5.1kg
Combination: motor+intermediate gearbox+eared gear (reduction ratio:1:200~1800), weight:5.1kg

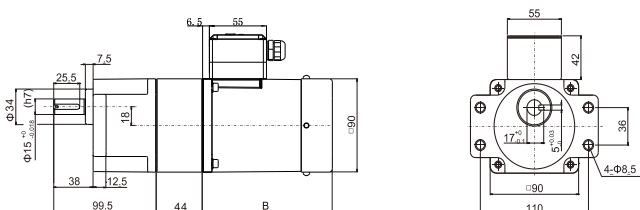

序号 No.	电机类型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187


90/120YS/YR/YT/YB/YF06

组合:电机+直角中实减速箱(减速比:1:3~200)
重量:6.2kg
Combination:motor+right angle solid gearbox(reduction ratio:
1:3~200),weight:6.2kg

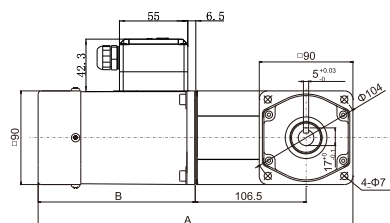


90/120YS/YR/YT/YB/YF07

组合:电机+中间减速箱+直角中实减速箱
(减速比:1:200~1800)重量:7.1kg
Combination: motor+intermediate gearbox+right angle solid
gearbox(reduction ratio:1:200~1800).weight:7.1kg


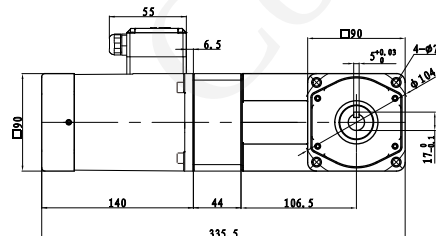


外形尺寸 (CAD) DIMENSIONS

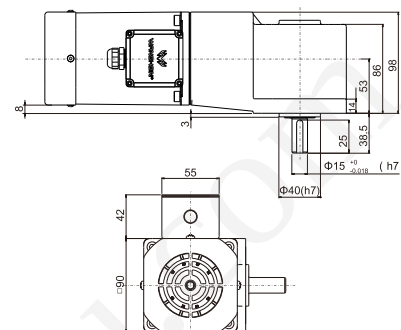

90/120YS/YR/YT/YB/YF08

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:6kg
Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200),
weight:6kg

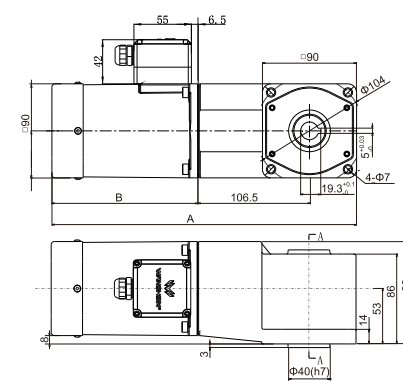

序号 No.	电机类型 Motor type	A	B	C
1	YS/YR	291.5	140	335.5
2	YT	302.5	151	346.5
3	YB	326.5	175	370.5
4	YF	338.5	187	382.5

90/120YS/YR/YT/YB/YF09

组合:电机+中间减速箱+直角中空减速箱
(减速比:1:200~1800) 重量:6.9kg
Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio: 1:200~1800), weight: 6.9kg

