

3D 矩阵灯

3D Matrix Light

3D矩阵灯是一款极具特色的装饰性艺术表达类产，采用箱体集中控制，箱体内置Art-Net控制器，可根据不同需求轻松调整灯光效果，操作便捷。在安装方面，箱体优势明显，安装方便简洁，大大提高了安装效率。采用LED芯片，亮度高，寿命长，节省了维修成本；广泛应用于商业场所、办公场所、酒店、展览馆等场所。

3D matrix light is a very distinctive decorative product. It adopts centralized control of the cabinet, and the cabinet has a built-in Art-Net controller, which can easily adjust the lighting effect according to different needs and is easy to operate. In terms of installation, the cabinet has obvious advantages, and the installation is convenient and simple, which greatly improves the installation efficiency. It adopts LED chips, which have high brightness and long life, saving maintenance costs; it is widely used in commercial places, office places, hotels, exhibition halls and other places.

P83 3D Matrix Light

工作电压 (Working voltage) AC110~220V

箱体矩阵像素 (Box Matrix Pixel) X:6 Y:36 Z:6

控制模式 (Control mode) Art-Net4/SD Card/sACN

产品重量 (Product Weight) 9KG

适配软件 (Supporting software) MAD-SHOW/MADRIX/TouchDesigner

箱体矩阵功率 (Box Matrix power) 150W


点间距 (Pixel Spacing) 83.3MM

通道顺序 (Channel) RGB

级联合数 (Cascade number) 254PCS

箱体拼接

Cabinet Connection

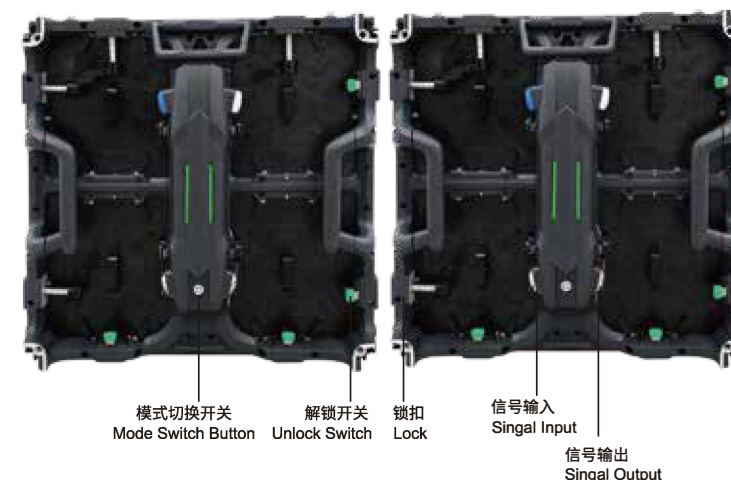

P62 3D Matrix Light

工作电压 (Working voltage) AC110~220V

箱体矩阵像素 (Box Matrix Pixel) X:8 Y:48 Z:8

控制模式 (Control mode) Art-Net4/SD Card/sACN

产品重量 (Product Weight) 11.7KG


适配软件 (Supporting software) MADRIX/TouchDesigner

箱体矩阵功率 (Box Matrix power) 370W

点间距 (Pixel Spacing) 62.5MM

通道顺序 (Channel) RGB


级联合数 (Cascade number) 254PCS

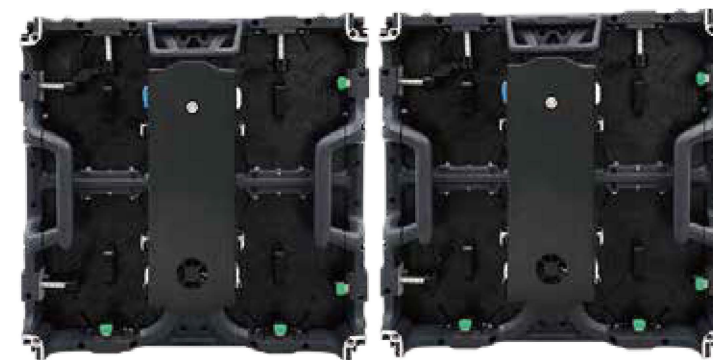

P41 3D Matrix Light

工作电压 (Working voltage)	AC110~220V	箱体矩阵功率 (Box Matrix power)	800W
箱体矩阵像素 (Box Matrix Pixel)	X:12 Y:72 Z:6	点间距 (Pixel Spacing)	41.5MM
控制模式 (Control mode)	Art-Net4/SD Card/sACN	通道顺序 (Channel)	RGB
产品重量 (Product Weight)	15KG	级联台数 (Cascade number)	254PCS
适配软件 (Supporting software)	MAD-SHOW/MADRIX/TouchDesigner		

每个箱体可连接72条灯串, 灯串采用错位布局, 可有效增加视觉点间距;
Each cabinet can connect 72pcs led light strings, and the light strings are staggered, which can effectively increase the visual point spacing;

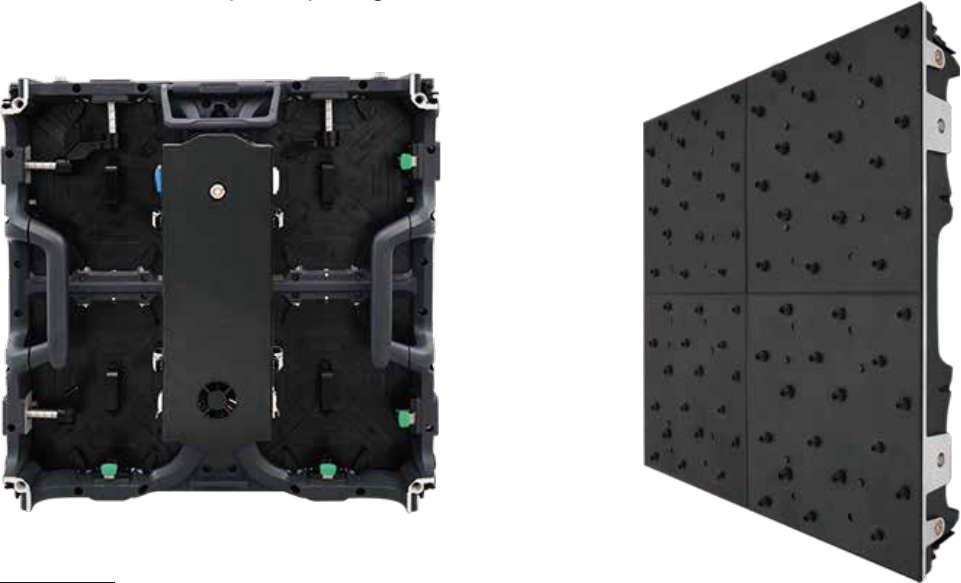

航空箱分层包装, 每个箱体独立包装;
Layered packaging of aviation boxes, with each box individually packaged;



箱体接线
Cabinet wiring



电源线级联: 上一台箱体的输出端连接下一台输入端完成电源级联 (电源线最多可级联12个箱体)
Power cable cascade: connect the output of the previous cabinet with the input of the next cabinet to complete the power cascade (The maximum of cabinet power cable can cascade is 12 cabinets)



信号线级联: 上一台箱体的信号输出端连接下一台信号输入端完成信号级联;
Network cable cascade: The signal output of the previous cabinet is connected to the signal input of the next cabinet to complete the signal cascade;



注意: 箱体左侧为信号输入端口, 右侧为信号输出端口, 不可接错;
Note: The left side of the cabinet is the signal input port, and the right side is the signal output port. Please connect them correctly.

连接3D矩阵灯
Connecting 3D matrix lights

Art-net模式连接矩阵灯
Art-net mode connection matrix light



箱体内置控制器, 网线连接箱体信号输入端口即可;
The cabinet has a built-in controller; Connect the network cable with the cabinet signal input port;


SD卡模式连接矩阵灯



通过信号转换板连接控台与箱体
Connect the control panel to the box through a signal conversion board

3D矩阵灯底座
3D Matrix Light Base

串灯底部安装固定底座, 用以固定串灯;
Disassembly, Tilt the string up and pull it out Install, Push out the base buckle and plug in the light string

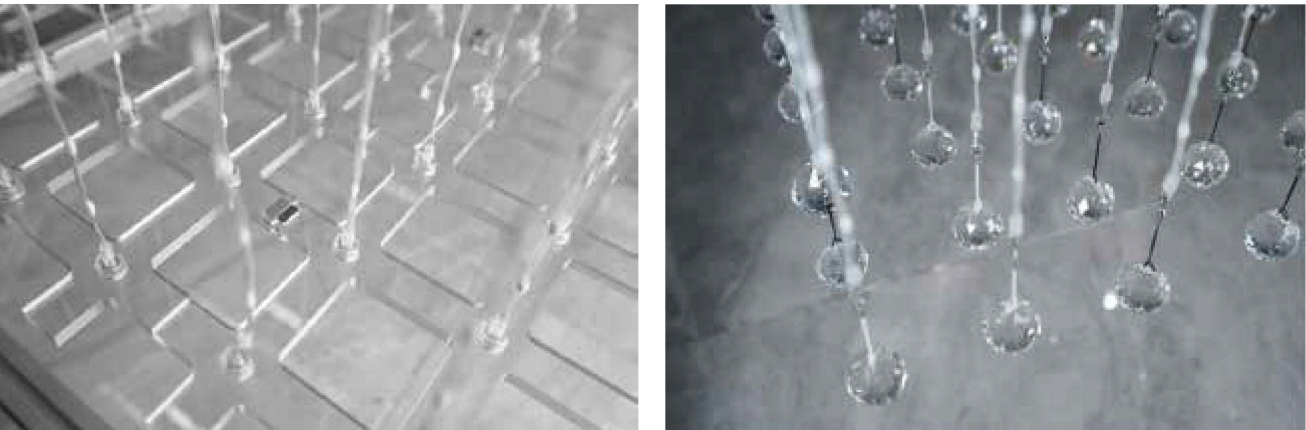

可根据需求将底板更换水晶球;
The bottom plate can be replaced with a crystal ball according to the customer's needs

悬挂安装
Suspension installation



按钮操作说明
Button Operation Instructions

模式切换
Mode switch

长按按钮3S-8S (按钮闪烁后松开, 完成模式切换, 当前有Art-Net和SD卡两种模式)
Long press the button for 3S-8S (release the button after it flashes to complete the mode switch. Currently, there are two modes: Art-Net and SD card.

SD卡模式
SD Card Mode

SD卡模式下, 点击按钮切换控制器内置效果
In SD card mode, click the button to switch the built-in effects of the controller.

自动写码
Automatic coding

双击按钮完成自动写码
Double click the button to complete automatic code writing

升级模式
Upgrade mode

按住按钮后上电, 按钮灯点亮后松开按钮, 绿色信号灯闪烁时, 开始升级, 闪烁停止升级完成;
Press and hold the button to power on. Release the button after the button light comes on. When the green signal light flashes, the upgrade starts. When the flashing stops, the upgrade is complete

恢复出厂
Factory restore

长按按钮10S (按钮灯熄灭后松开按钮完成恢复出厂设置)
Long press the button for 10S (release the button after the button light goes out to complete the factory reset)