DP Electronics (Deutsche Power)

High Voltage System

LiFePO4 Battery +Control Module

HV Battery System 96V~240V

Common Models	96VDC		192VDC		240VDC			N Series
	CLFP96-50-H	CLFP96-100-H	CLFP192-50-H	CLFP192-100-H	CLFP240-20-H	CLFP240-50-H	CLFP240-100-H	CLFPXXX-YY-H
Nominal Voltage	96		192		240			96~240*N
Capacity AH	50AH	100AH	50AH	100AH	20AH	50AH	100AH	50AH~100*N
Energy	4.8	9.6	9.6	19.2	4.8	12	24	4.8AH~24AH*N
Cluster	1	2	1	2	1	1	2	1~2*N
Adjustable Voltage Range	96-106		192-220		240-260			96~260*N
Cycle Life	5000 times @ 25C 1C/1C 80% DOD							
Charge Voltage	106		213		260			106~260*N
Standard charging Current	50A	100A	50A	100A	20A	50A	100A	20~100*N
Max Charging Current	100A	200A	100A	200A	40A	100A	200A	40~200*N
Discharge Current	100A	200A	100A	200A	40A	100A	200A	40~200*N
Max Discharge Current	200A	400A	200A	400A	80A	200A	400A	80~400*N
Dimension	6U	6U	6U	6U	6U	6U	8U	6U~12U
Nominal C/C	1C/2C/4C/8C							
Discharge Temp	-20~55C							
Charge Temp	0~55C							
Storage Temp	-10~55C							
Communication	RS232/RS485/CAN							
Display	LCD							
Terminal	Anderson/Connector							
Warranty	5 Years							
Designs Life	10 Years							
Water Proof	IP 54							
Certificate	UL/CE/ROHS UN38.3							

HV Battery System 384V~480V

Common Models	348VDC			480VDC			N Series
Models	CLFP380-20-H	CLFP380-50-H	CLFP380-100-H	CLFP480-20-H	CLFP480-50-H	CLFP480-100-H	CLFPXXX-YY-H
Nominal Voltage	384VDC			480VDC			384~480*N
Capacity AH	20 AH	50 AH	100 AH	20 AH	50 AH	100 AH	20AH~100*N
Energy	7.6KWH	19 KWH	38.4 KWH	9.6 KWH	24 KWH	48KWH	7.6KWH~100KWH*N
Cluster	1	2	3	1	2	3	1~3*N
Adjustable Voltage Range	380-448 V			480~560 V			380~560V
Cycle Life	5000 times @ 25C 1C/1C 80% DOD						
Charge Voltage	384-560			480~590			384~590
Standard charging Current	20 A	50A	100 A	20A	50A	100A	20~100
Max Charging Current	40A	100A	200A	40A	100A	200A	40~200
Discharge Current	40A	100A	200A	40A	100A	200A	40~200
Max Discharge Current	80A	200 A	400 A	80A	200A	400A	80~400
Dimension	4U	6U	6U	6U	8U	12U	6U~32U*N
Nominal C/C	1C/2C/4C/8C						
Discharge Temp	-20~55C						
Charge Temp	-0~55C						
Storage Temp	-10~45C						
Communication	RS485/CAN						
Display	LCD						
Terminal	Anderson/connector						
Warranty	5 Years						
Design Life	10 Years						
Water Proof	IP 54						
Certificate	UL/CE/ROHS UN38.3						

HV Battery System 500V~800V

Common Models	CLFP537-100-4	CLFP537-200-4	CLFP537-300-4	CLFP537-100-4*N-H
Nominal Voltage	537.6V			
Cluster	1	2	3	N
Adjustable Rate Voltage	500~800V			
Nominal Capacity	100Ah	200Ah	300Ah	100Ah~300Ah*N
Energy	53.76Kwh	107.52Kwh	161.28Kwh	53.76~161.28Kwh*N
Cycle Life	5000 times@25C 1C/1C 80%DOD			
Charge Voltage	596V			
Adjustable Charge Voltage	500V~900V			
Standard Charging Current	50A	100A	150A	50~150A*N
Max. Charge Current	100A	200A	300A	100~300A*N
Discharge Cut-off Voltage	420V			
Adjustable Discharge Cutt-off Voltage	400V~800V			
Discharge Current	50A	100A	150A	50~150A*N
Max.Discharge Current	100A	200A	300A	100~300A*N
Discharge Temp.	-20~55C			
Charge Temp.	0~55C			
Storage Temp.	-10~45C			
Commutation	RS485/CAN			
Display	LCD			
Terminal	ANDERSON/CONNECTOR			
Weight	490kg	980kg	1470kg	490kg~1470kg*N
Dimension	32U*1P	32U*2P	32U*3P	32U*1P~3P*N
Warranty	5years			
Design Life	10years			
IP Level	IP54			
Certificate	CE UL RoHS UN38.3			

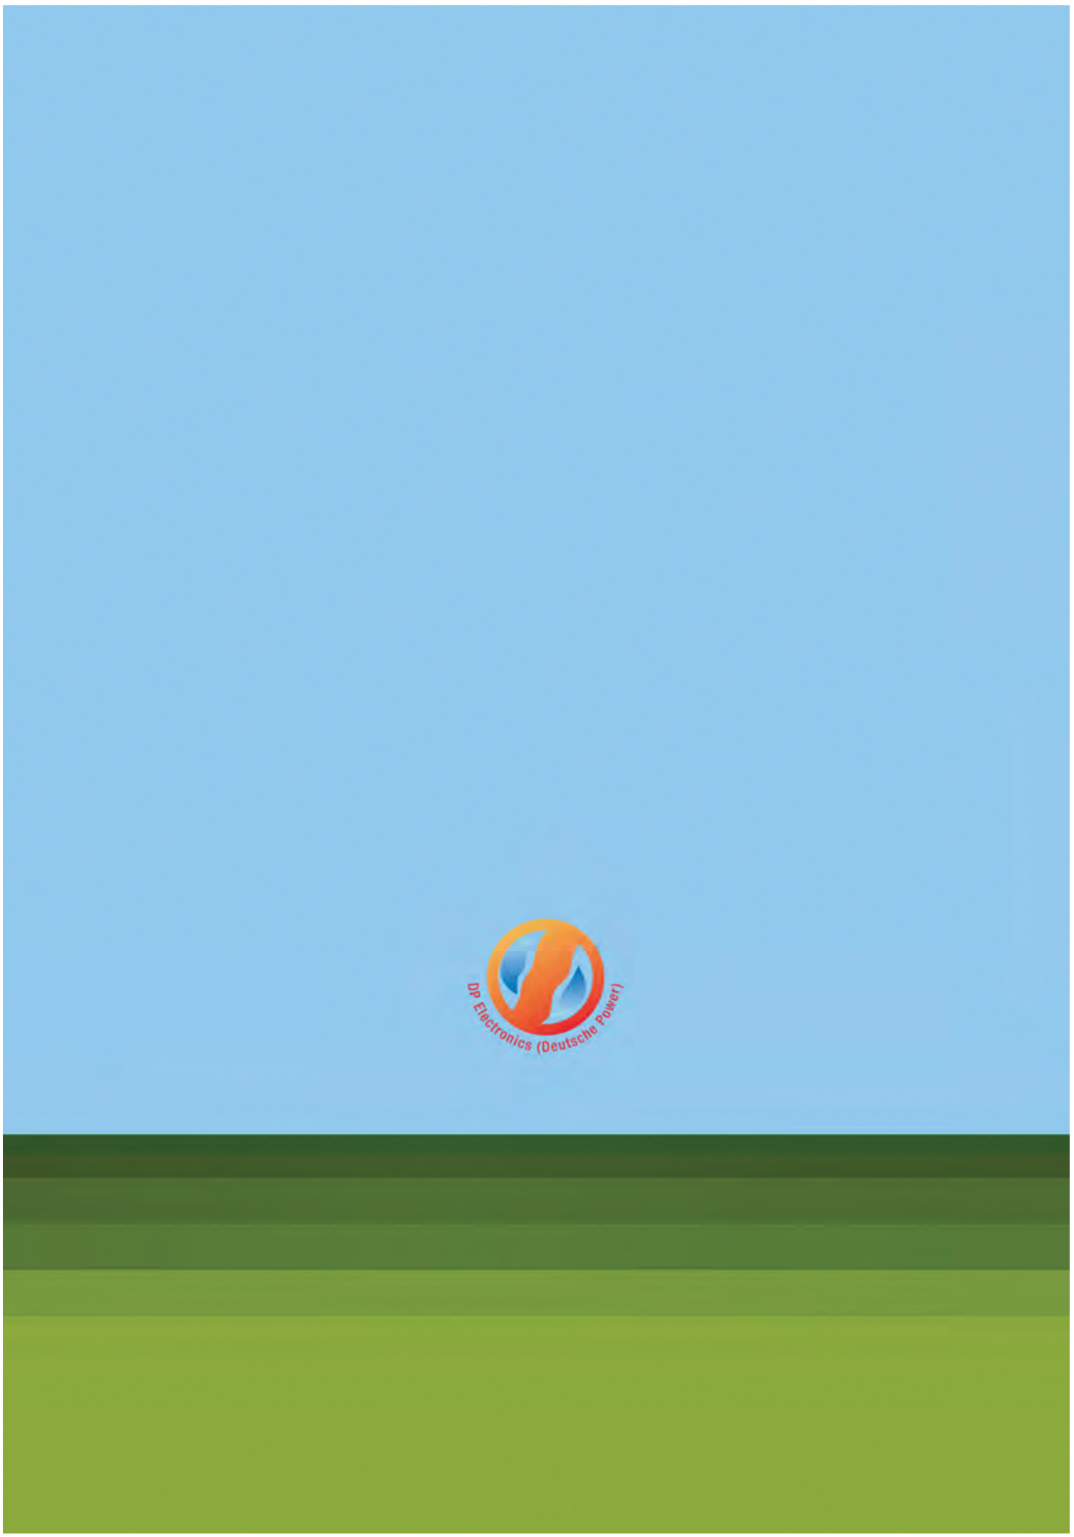
DP Electronics (Deutsche Power)