DP Electronics (Deutsche Power)

Complete Lithium Solution

12V I 24V I 48V I 51.2

Rack Mount I Wall Mount I Stacked I Block

Battery System 12V LiFePo4

Characteristics

- Lead-acid plastic shell package;
- Weight lighter but higher energy density than s same capacity of lead-acid battery;
- Built-in battery charge/discharge protection;
- Intelligent battery balance management with BMS;
- 100%DOD， 2500 - 3000 Cycles;
- Widely used in photovoltaic, street lighting, telecommunications and etc.

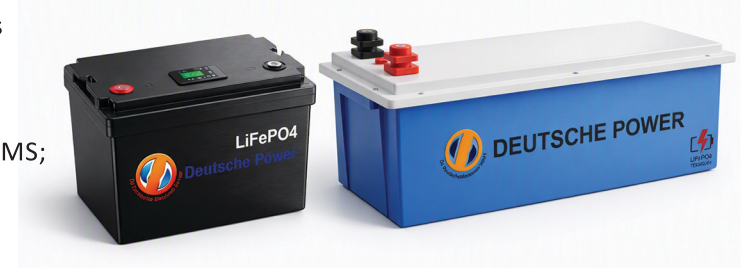

Specification

Models	Ratings	Dimensions(mm)			Weight(Kg)	Max. Charge Current(A)	Max. Discharge Current(A)
		L ±1	W ±1	H1 ±2			
CPLI-1220AH	12V20AH	186	76	168	3.2	10	20
CPLI-1225AH	12V25AH	186	76	168	3.4	12.5	25
CPLI-1240AH	12V40AH	195	165	170	6.2	20	40
CPLI-1250AH	12V50AH	195	165	170	6.6	25	50
CPLI-1260AH	12V60AH	229	138	208	9.3	30	60
CPLI-1275AH	12V75AH	229	138	208	9.8	37.5	75
CPLI-1280AH	12V80AH	329	172	215	13	40	80
CPLI-12100AH	12V100AH	329	172	215	15.5	50	100
CPLI-12120AH	12V120AH	483	170	241	17.4	60	120
CPLI-12150AH	12V150AH	483	170	241	19.7	75	150
CPLI-12160AH	12V160AH	522	240	218	25	75	150
CPLI-12200AH	12V200AH	522	240	218	26.3	75	150
CPLI-12250AH	12V250AH	522	240	218	32	75	150

Battery System 24V LiFePo4

Characteristics

- Lead-acid plastic shell package
- Weight lighter but higher energy density than same capacity of lead-acid battery.
- Built-in battery charge/discharge protection
- Intelligent battery balance management with BMS
- 100%DOD, 2500 - 3000 Cycles

Specification

Models	Ratings	Dimensions(mm)			Weight(Kg)	Max. Charge Current(A)	Max. Discharge Current(A)
		L ±1	W ±1	H1 ±2			
CPLI-2410AH	24V10AH	186	76	168	3.2	5	10
CPLI-2412AH	24V12.5AH	186	76	168	3.4	6	12.5
CPLI-2420AH	24V20AH	195	165	170	6.2	10	20
CPLI-2425AH	24V25AH	195	165	170	6.6	12.5	25
CPLI-2440AH	24V40AH	329	172	215	13	20	40
CPLI-2450AH	24V50AH	329	172	215	13.5	25	50
CPLI-2460AH	24V60AH	483	170	241	15.4	30	60
CPLI-2475AH	24V75AH	483	170	241	16	37.5	75
CPLI-2480AH	24V80AH	522	240	218	25	40	80
CPLI-24100AH	24V100AH	522	240	218	26.3	50	100
CPLI-24125AH	24V125AH	522	240	218	32	62.5	125

48V~51.2V With Parallel Option

Battery System 48V LiFePo4

Application

EV / PHEV
Electric wheelchairs,
Electric motorcycle
Energy storage power station
Solar Energy Storage
Scenery energy storage system
Telecommunication
Marine Shipment
Power pack/Power wall
Power tools
Portable mobile products
UPS

Lithium Iron Phosphate Batteries Module

Smart Battery balanced management;
Smart charging and discharging management the FCC capacity automatic learning;
High-precision voltage detection (25mV/cell);
High-precision current detection (1A @ <30A range);
5-channel battery temperature detection channel;
Hardware and software over-voltage, low-voltage, under-voltage, over-current, high and low temperature and short circuit protection;
EEPROM can be stored in the production and use of history;
Compatible the the SMBUS V2.0 and conditions involving SBData V1.1;
LED and buzzer: capacity display and fault alarm;
RS232 interface: SOC and SOH information can be used to read;
Cascade battery modules RS485 communication;
Module size to meet the requirements of standard rack, easy to install;

Specification

Models	Ratings	Dimensions(mm)			Remark	Weight(Kg)	Max. Charge Current(A)	Max. Discharge Current(A)
		Length	Depth	Height				
CPLI-4805AH	48V05AH	220	83	97	Plastic Pack	2.7	2.5	5
CPLI-4810AH	48V10AH	220	91	135	Plastic Pack	5	5	10
CPLI-4820AH	48V20AH	470	432	89	2U Cabinet	18.4	10	20
CPLI-4825AH	48V25AH	470	432	89	2U Cabinet	19.2	12.5	25
CPLI-4840AH	48V40AH	400	432	133	3U Cabinet	30.1	20	40
CPLI-4850AH	48V50AH	400	432	133	3U Cabinet	32.2	25	50
CPLI-4860AH	48V60AH	480	432	178	4U Cabinet	43.8	30	60
CPLI-4875AH	48V75AH	480	432	178	4U Cabinet	45.4	37.5	75
CPLI-4880AH	48V80AH	470	432	522	5U Cabinet	54.3	40	80
CPLI-48100AH	48V100AH	470	432	522	5U Cabinet	56.2	50	100
CPLI-48120AH	48V120AH	700	432	522	5U Cabinet	78.7	60	120
CPLI-48150AH	48V150AH	700	432	522	5U Cabinet	82.3	75	150

Battery System 48V ~51.2 LiFePo4

Application

EV / PHEV
Electric wheelchairs,
Electric motorcycle
Energy storage power station
Solar Energy Storage
Scenery energy storage system
Telecommunication
Marine Shipment
Power pack/Power wall
Power tools
Portable mobile products
UPS

Lithium Iron Phosphate Batteries Module

Smart Battery balanced management;
Smart charging and discharging management the FCC capacity automatic learning;
High-precision voltage detection (25mV/cell);
High-precision current detection (1A @ <30A range);
5-channel battery temperature detection channel;
Hardware and software over-voltage, low-voltage, under-voltage, over-current, high and low temperature and short circuit protection;
EEPROM can be stored in the production and use of history;
Compatible the the SMBUS V2.0 and conditions involving SBData V1.1;
LED and buzzer: capacity display and fault alarm;
RS232 interface: SOC and SOH information can be used to read;
Cascade battery modules RS485 communication;
Module size to meet the requirements of standard rack, easy to install;

Specification

Common Models	CLFP-51.2-50-R	CLFP-51.2-100-R	CLFP-51.2-200-R
Energy	2.56KWh	51.2KWh	10.24KWh
Nominal Voltage	51.2V	51.2V	51.2V
Nominal Capacity	50Ah	100Ah	200Ah
Factory Voltage	52.0V-54.40V		
Charge Method	CC-CV 58.4V 0.05C cut-off		
Max. Continuous Charge Current	50A≥ 10°C	100A≥ 10°C	100A≥ 10°C
End of Discharge Voltage	40V		
Max. Continuous Discharge Current	50A≥ 10°C	100A≥ 10°C	100A≥ 10°C
Cycle Life	≥5000times 80% SOC 1C/1C 25. C	≥6000times 80% SOC 1C/1C 25. C	≥6000times 80% SOC 1C/1C 25. C
ACIR	≤20mΩ		
Max Series Parallel	Max. 16P/no support series		
Charge Temperature	0°C~45°C		
Discharge Temperature	-10°C~55°C		
Storage Temperature	Less than 8 Months: -10°C~35°C 60 ± 25%R.H Less than 3 Months: -10°C~45°C 60 ± 25%R.H Less than 8 Months: -10°C~65°C 60 ± 25%R.H		
Installation Method	Standard 19 inch Cabinet		
Communication	RS485 RS232 CAN		
IP Level	IP 21		
Weight	27.5kg	47kg	87kg
Size(W*D*H)	483*370*117mm	483*550*117mm	483*600*266mm
Certification	ICE62619 UN38.3 CE RoHS		

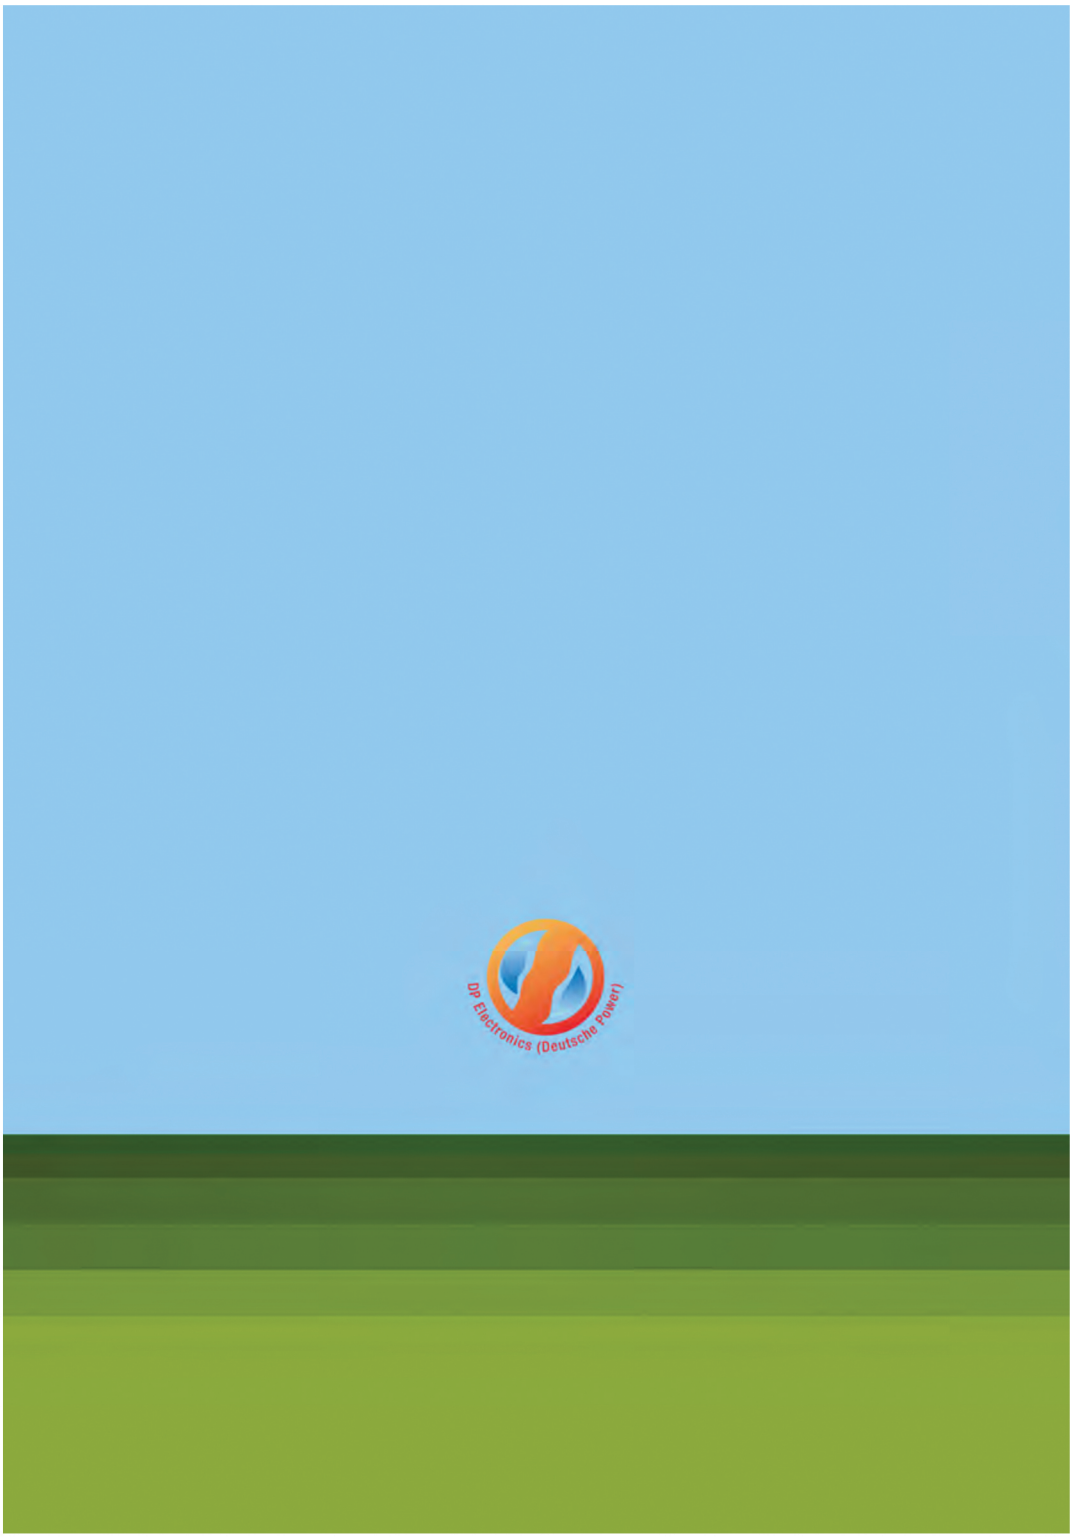
DP Electronics (Deutsche Power)