Station: operator sign-in and shift start

This is an informational translation. The matching Russian revision is authoritative. Step-by-step guide for Markiro Autonom line operators: signing in at the station with a badge or a personnel number and PIN, choosing a shift of the line, creating a new shift and starting work.

Document code	MKR-INS-01
Revision	2026.10/02
Effective from	30 October 2026
Revision verification	https://markiro.app/d/MKR-INS-01/2026.10/02/30.10.2026
Language	EN
Operator	Богатырев Владислав Сергеевич
Contacts	https://markiro.app · hello@v-b.tech · +7 934 355-14-90

1. Purpose

This instruction covers the operator's daily sign-in at a Markiro Autonom station and the shift start: from the badge to a work screen that is ready to scan. The station works with the site's main computer — the host — over the local network: it gets reference data, shifts and SSCC numbers from the host and sends the results of its work back to it. The instruction is intended for line operators; pairing the station with the host and setting up hardware are covered in MKR-INS-04, the scanning cycle in MKR-INS-02.

Note: The station interface is in Russian only. Screen labels are quoted in Russian, with an English translation in brackets. The screenshots use demo data: product names, shift numbers, lines and names on your station will differ.

2. Before you start


- The station is on and shows “Вход оператора” (Operator sign-in). The header shows the station's name, its line and the organization, and “Никто не вошёл” (Nobody signed in) in place of an operator.
- The header indicators are green: “Связь есть” (Connected) — the station reaches the host; “Сканер готов” (Scanner ready) — the scanner is connected.
- You have your personal operator badge, or a personnel number and a PIN. Operators, badges and PINs are set up by an administrator in the office, under “Операторы” (Operators).

Important: If instead of the sign-in the station shows “Служба хоста не отвечает” (The host service is not responding), “Подключение к хосту в сети” (Connecting to the host on the network), “Выбор линии” (Line selection) or “Хост не принимает это устройство” (The host does not accept this device), do not continue — call a technician or an administrator: the station has to be paired with the host (MKR-INS-04).

3. Signing in

Step 1. Hold your badge up to the scanner

On the “Вход оператора” (Operator sign-in) screen, hold your personal badge up to the scanner — a badge can be scanned at any moment without pressing anything. The station recognizes the code itself and opens the line's shifts at once. A new badge starts working after the station syncs with the host.

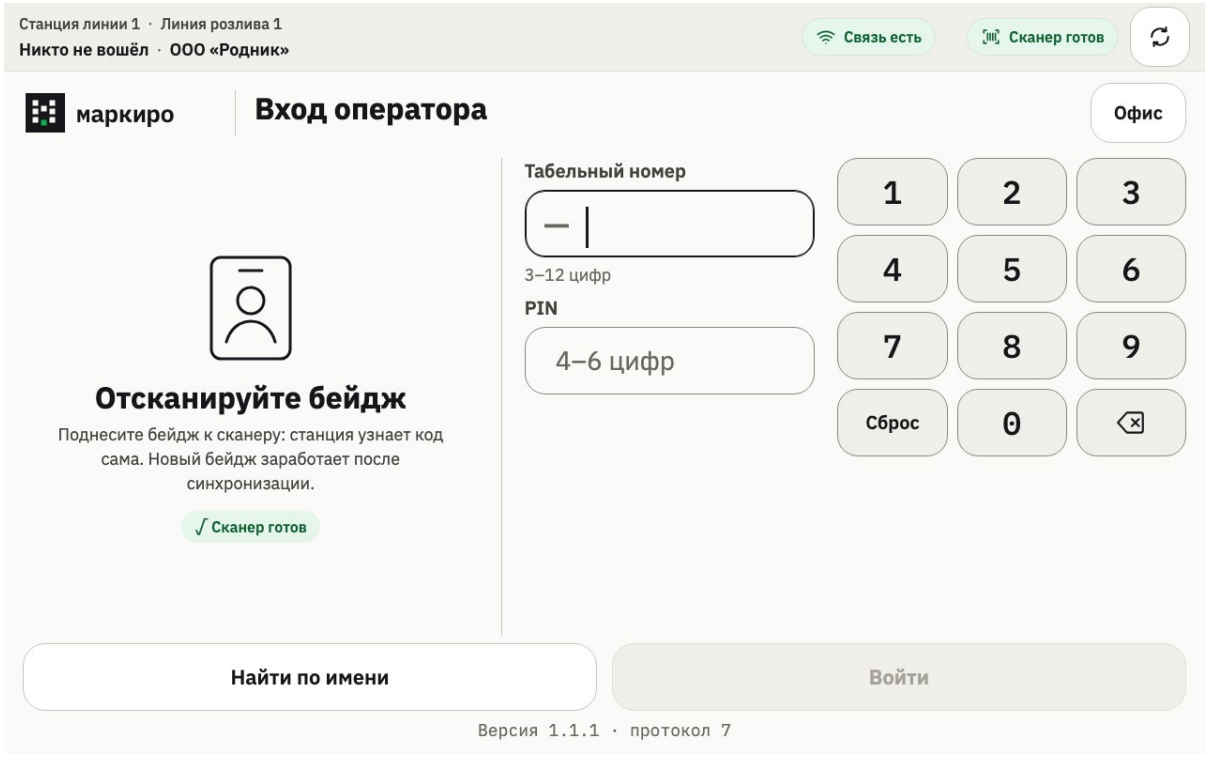


The “Вход оператора” (Operator sign-in) screen: the station waits for a badge

Expected result: The “Смены линии” (Line shifts) screen opened, with your name in the header.

Step 2. Or sign in with your personnel number and PIN

On the keypad on the right, type your personnel number — 3 to 12 digits. Tap the “PIN” field and type your PIN — 4 to 6 digits, then tap “Войти” (Sign in). “Сброс” (Reset) clears the field; the arrow key erases the last digit.

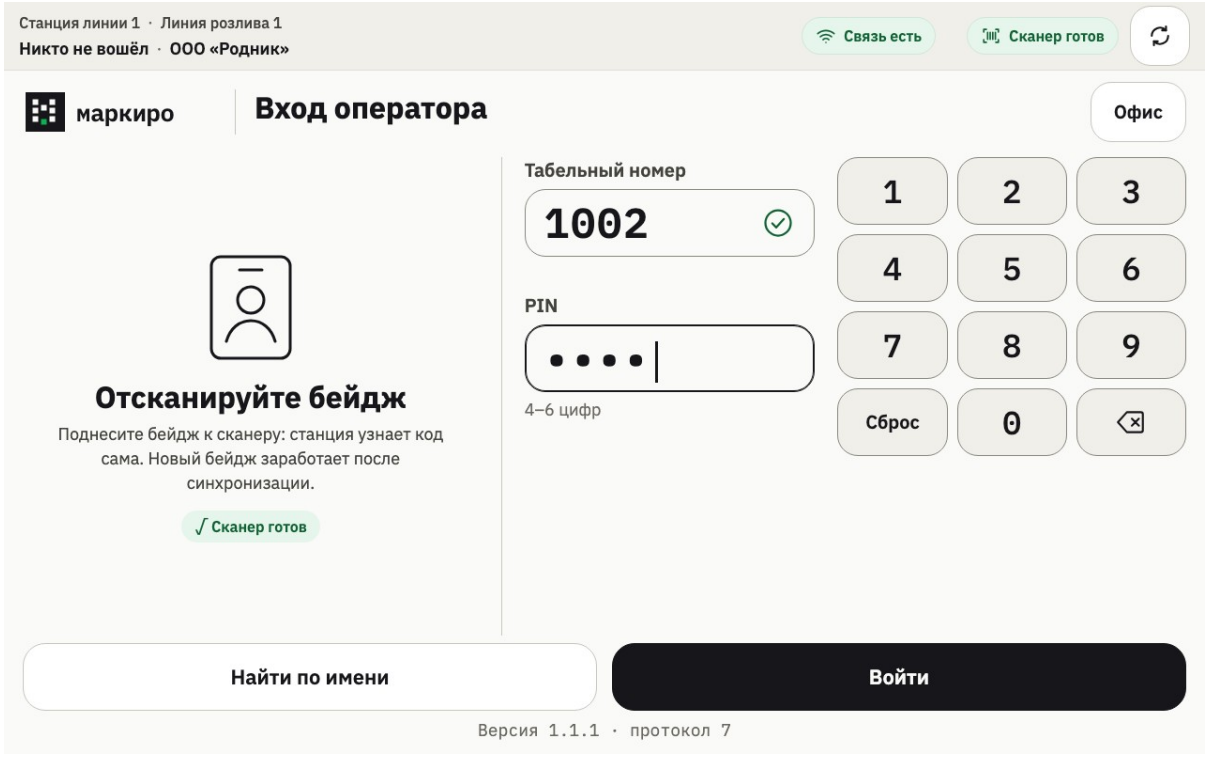


Personnel number and PIN typed, “Войти” (Sign in) is available

Expected result: The “Смены линии” (Line shifts) screen opened.

Step 3. If you do not remember your personnel number, find yourself by name


Tap “Найти по имени” (Find by name) and type the first 2–3 letters of your name on the on-screen keyboard. Pick yourself in the list: the station fills in your personnel number. Then enter your PIN and tap “Войти” (Sign in). While you type a name, badges are not scanned; “Назад” (Back) returns to the sign-in.

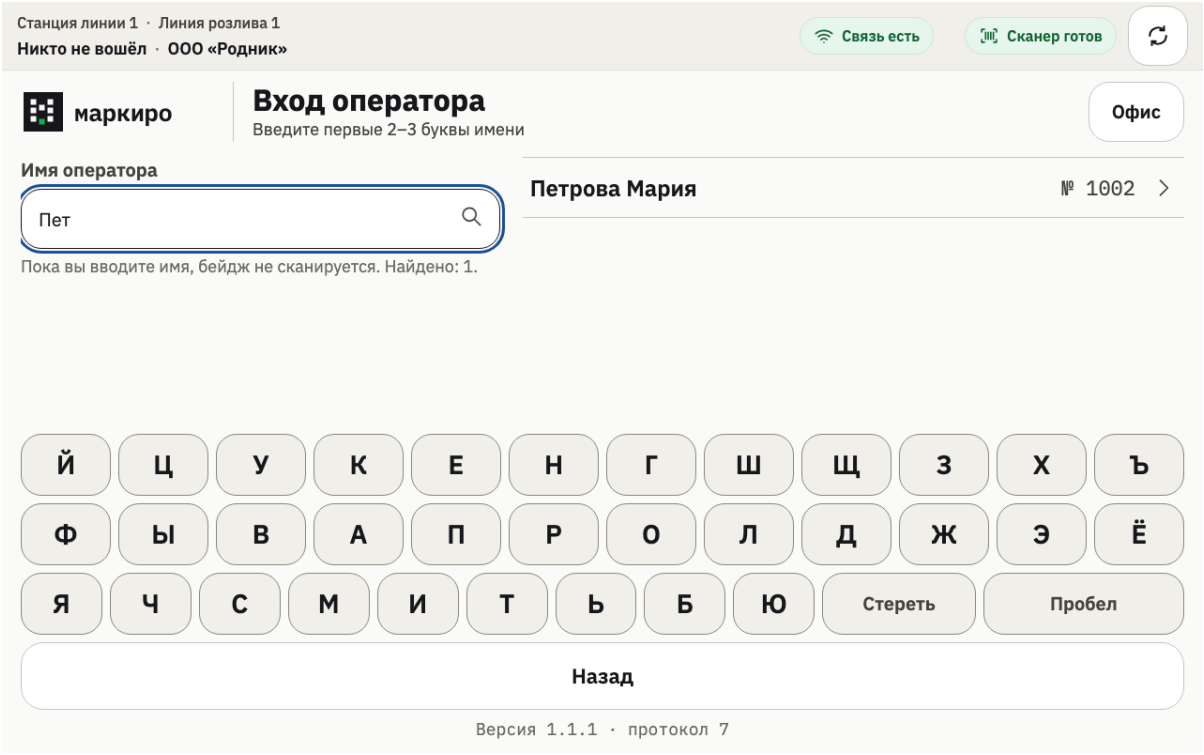

Finding an operator by name

Step 4. If the PIN is not accepted

The station shows “Неверный табельный номер или PIN” (Wrong personnel number or PIN) and clears the PIN field. Check the number and type the PIN again. After five wrong PINs in a row, signing in with a PIN for that personnel number is paused for 5 minutes — signing in with a badge still works. When the station collects ten failed sign-in attempts less than 10 minutes apart, signing in on it is paused for a minute for everyone; the screen shows a countdown.

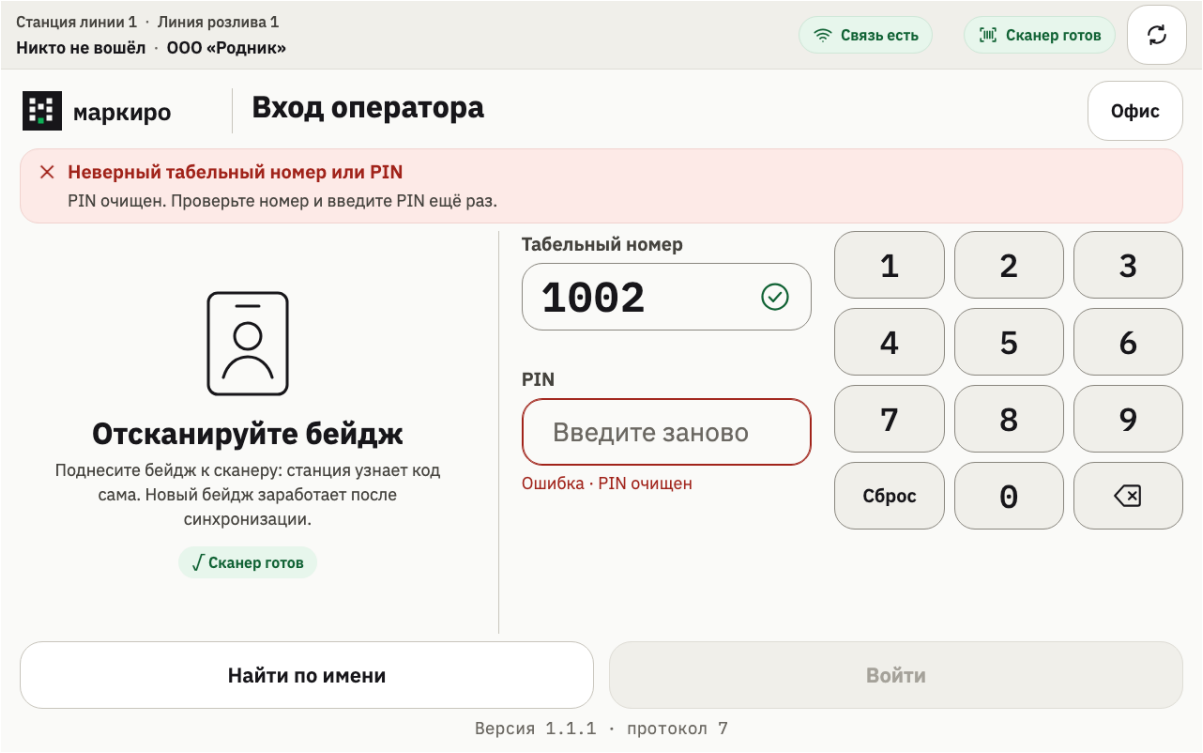


Wrong PIN: the PIN field is cleared

4. Choosing a shift

The “Смены линии” (Line shifts) screen shows the shifts of this station's line that are not closed: those planned in the office and those created on stations. Shifts of other lines are not shown. A card shows the status (“Не начата” — Not started, “В работе” — In progress, “Закрывается” — Closing, “Закрыта в офисе” — Closed in the office), the shift number, the product, the production date, the shift date, the plan and how much has been accepted, the mode (“Агрегация” — Aggregation, or “Проверка” — Validation) and a “Паллеты” (Pallets) tag when the shift builds pallets.

Step 1. Open the shift

Tap the button on the card of the shift you need. “Открыть” (Open) — the shift has not been started; this needs a connection to the host. “Продолжить” (Continue) — this station already runs the shift; it can be continued without a connection. “Присоединиться” (Join) — another station runs the shift and the line allows several; this needs a connection to the host. “Завершить” (Finish) — the shift was closed in the office: finish the box and the label on the station and close the shift. If the card says “Занята другой станцией” (Taken by another station), the shift cannot be opened from this station.

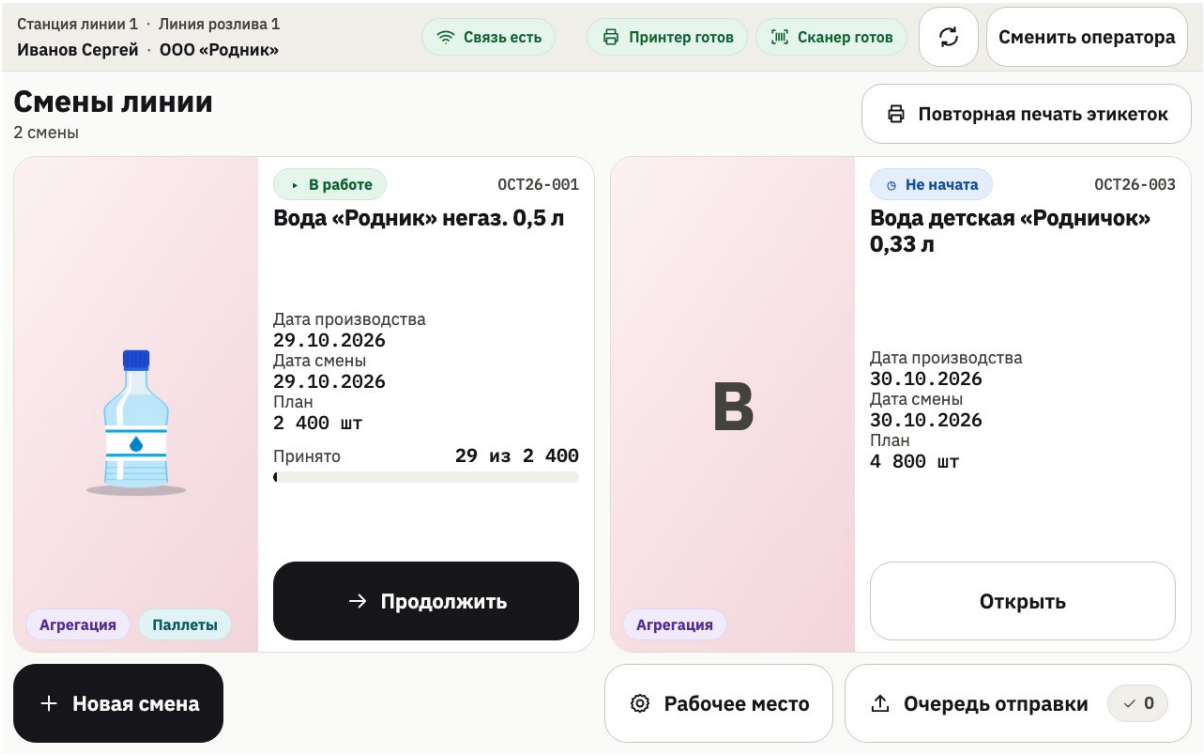

Line shifts: a shift in progress and a shift not yet started

Expected result: The shift's work screen opened.


The buttons at the bottom of the screen: “Новая смена” (New shift, section 5), “Рабочее место” (Workstation, the station's setup, MKR-INS-04) and “Очередь отправки” (Send queue: records not yet delivered to the host, MKR-INS-02). The “Повторная печать этикеток” (Label reprint) button at the top is covered in MKR-INS-03.

5. Creating a new shift

If the shift you need is not in the list, it can be created on the station. The host gives the shift its number, so a shift can only be created while the station reaches the host: without a connection the button reads “Нужна связь с хостом” (A connection to the host is needed).

Step 1. Choose the product

Tap “Новая смена” (New shift). Scan the product barcode or a marking code from the packaging — or type at least two letters into “Название товара” (Product name) and pick the product in the list. The station offers only products the office has put into use; if the product is missing, it has to be added in the office (MKR-INS-10).

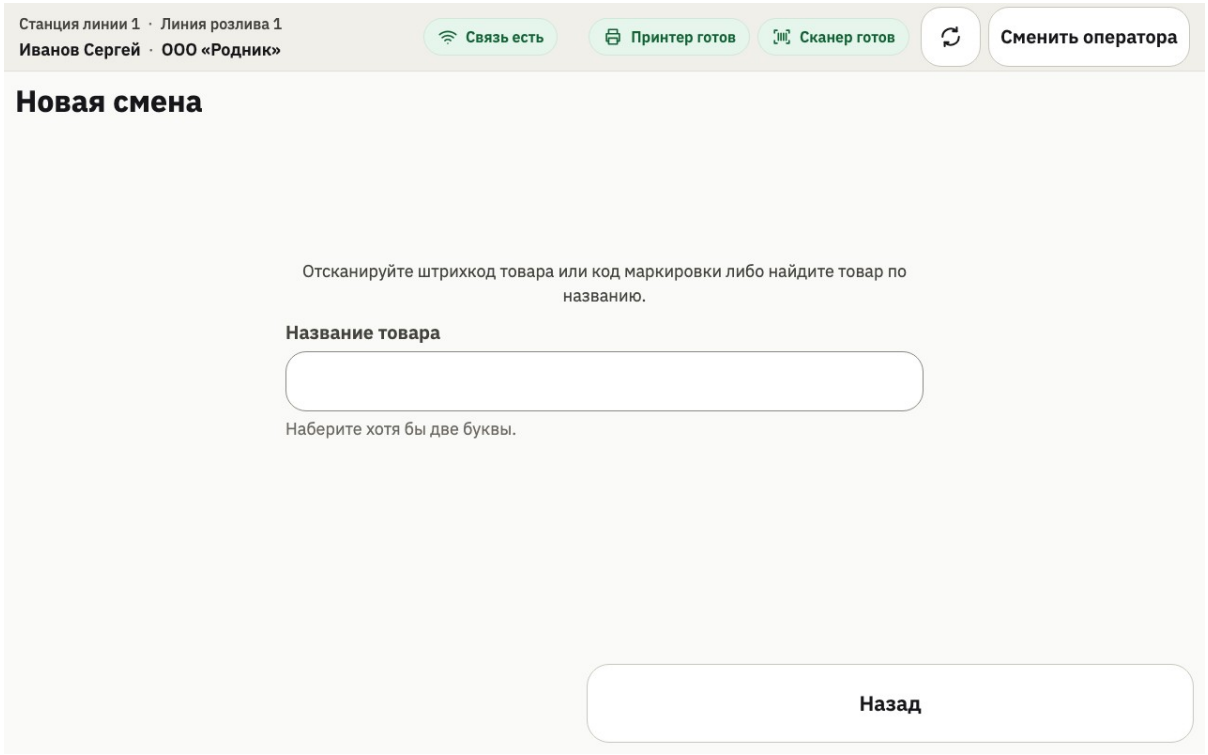


New shift: the station waits for a product

Expected result: The shift form opened with the product's photo, name and GTIN.

Step 2. Choose the mode, pallets, plan and dates


“Режим работы” (Mode): “Агрегация” (Aggregation) — products are packed into boxes and box labels are printed; “Проверка” (Validation) — codes are checked as they are scanned and no box labels are printed. In “Агрегация” (Aggregation) the “С паллетами” (With pallets) card is on when the product card says how many boxes go on a pallet — the number shows below it as “Коробов на паллете” (Boxes per pallet). Turn it off if pallets are not needed. “В коробе, шт.” (Per box, pcs) comes from the product; “План, шт.” (Plan, pcs) is optional — a shift may have no plan. Type numbers on the keypad on the right after tapping the field. “Дата производства” (Production date) and “Дата смены” (Shift date) default to today; check the production date against the product. In “Агрегация” (Aggregation) mode tap “Далее” (Next). In “Проверка” (Validation) mode without duplicate printing tap “Создать и открыть” (Create and open). With “Печатать дубликат Data Matrix” (Print a Data Matrix duplicate) enabled, tap “Далее” (Next), choose “Шаблон этикетки продукции” (Product label template), and set “Обязательная проверка этикетки” (Mandatory label verification) before creating the shift.

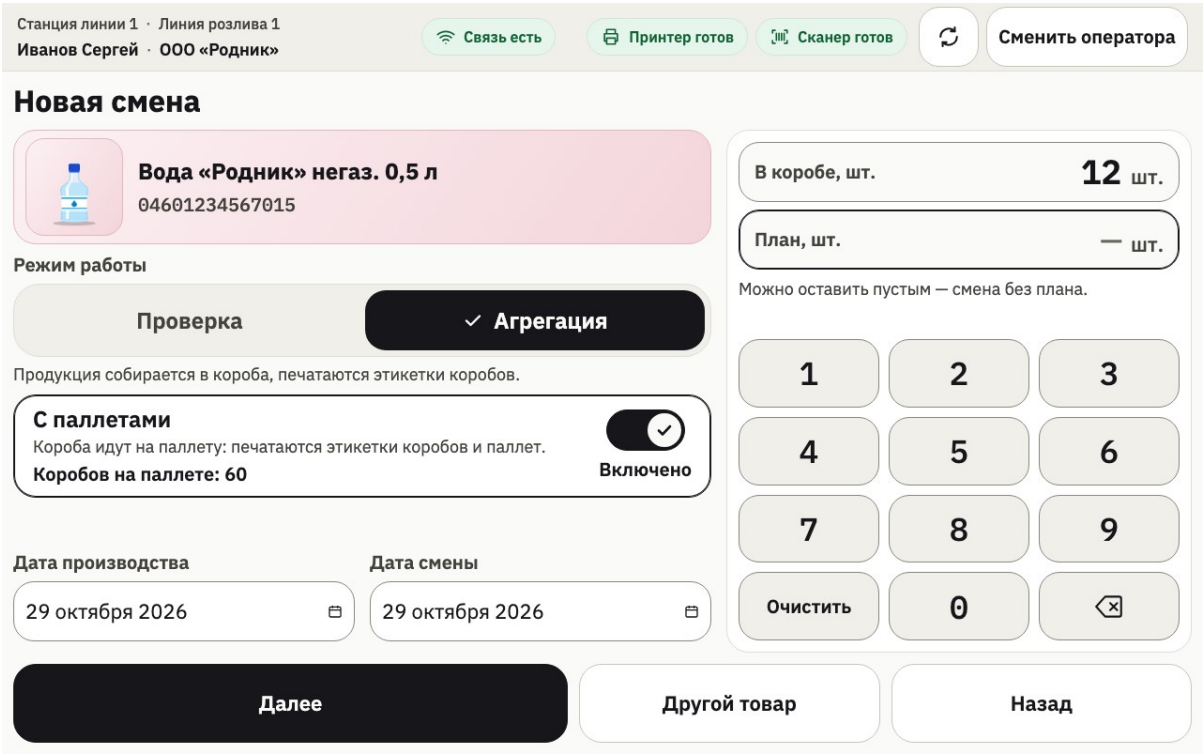

A new shift in “Агрегация” (Aggregation) mode with pallet assembly

Step 3. In Aggregation mode, check the box label template

At the “Шаблон этикетки короба” (Box label template) step the station has already chosen a fitting template: it is named in the line above the list, with a preview of the label on the right. Pick another one if needed. Tap “Далее” (Next), or “Создать и открыть” (Create and open) on a shift without pallets.

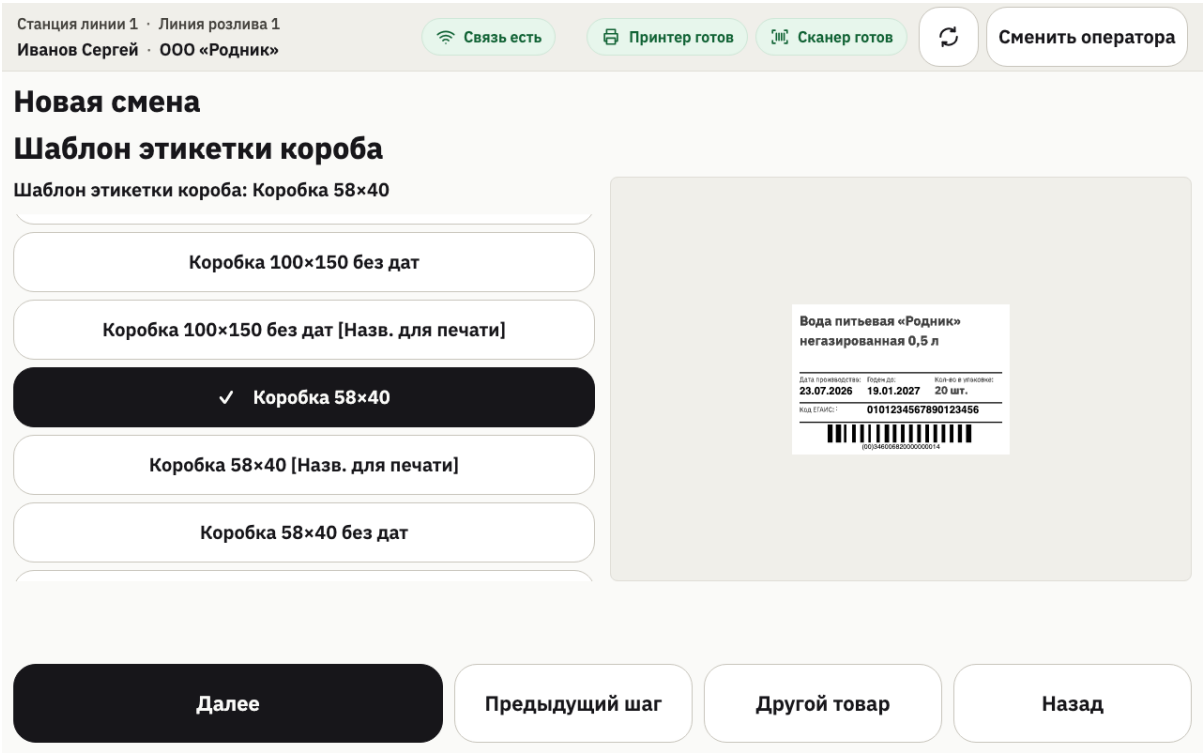


Choosing the box label template with a preview

Step 4. For a shift with pallets, the pallet label template

Check the “Шаблон этикетки паллеты” (Pallet label template) the same way and tap “Создать и открыть” (Create and open). If the pallet printer uses A4 sheets, choose “Лист А4 паллеты” (Pallet A4

sheet) instead: “По умолчанию товара” (Product default) or a specific enabled sheet. “Предыдущий шаг” (Previous step) returns to the previous step, “Другой товар” (Another product) to the choice of product.

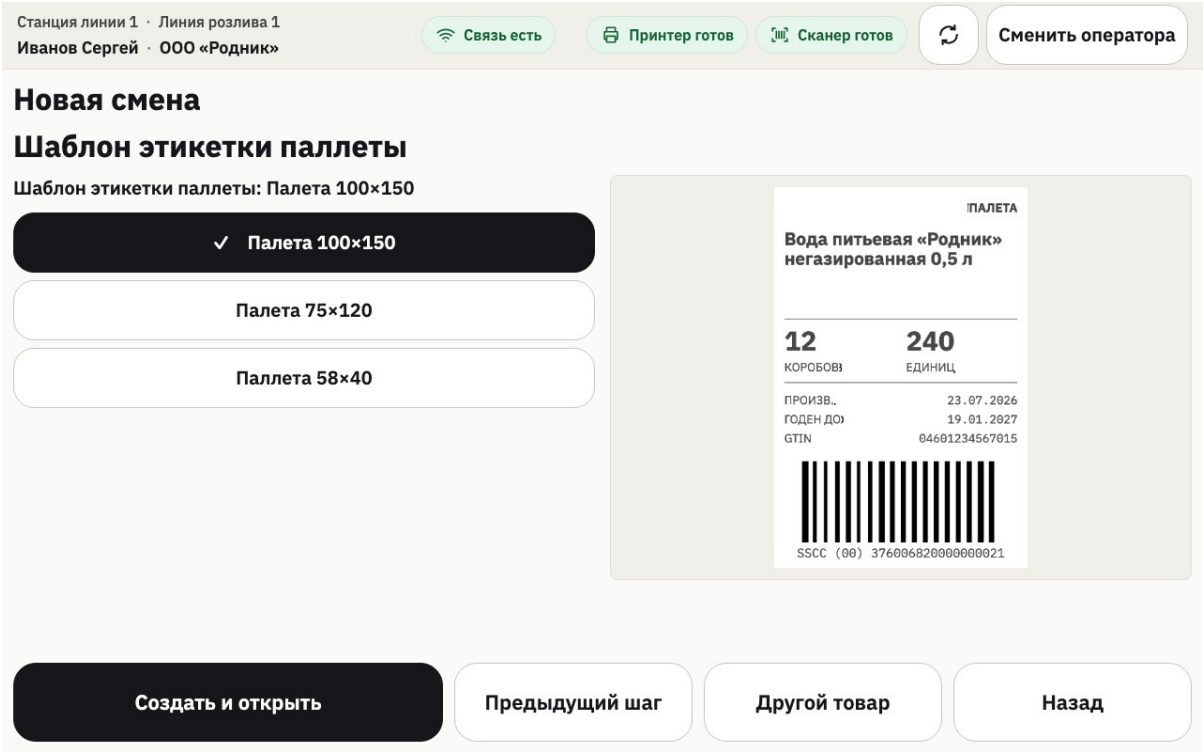

The pallet label template and “Создать и открыть” (Create and open)


Expected result: The host numbered the shift and the station opened its work screen.

Important: Check the product and the production date before creating the shift: they are printed on box and pallet labels. If you made a mistake, tell your supervisor or an office administrator.

6. Starting work

Step 1. Check the work screen

Before the first scan make sure: the header shows your name and the shift number; the shift band shows the right product, its GTIN and the mode; “Принято в смене” (Accepted in shift) is zero or matches the work already done in the shift. The open box reads “Короб откроется с первым кодом” (The box opens with the first code), and “Последний скан” (Last scan) reads “Ожидание” (Waiting). On the work screen the connection, printer, scanner and queue indicators are collapsed into icons; a problem expands its icon into a caption.

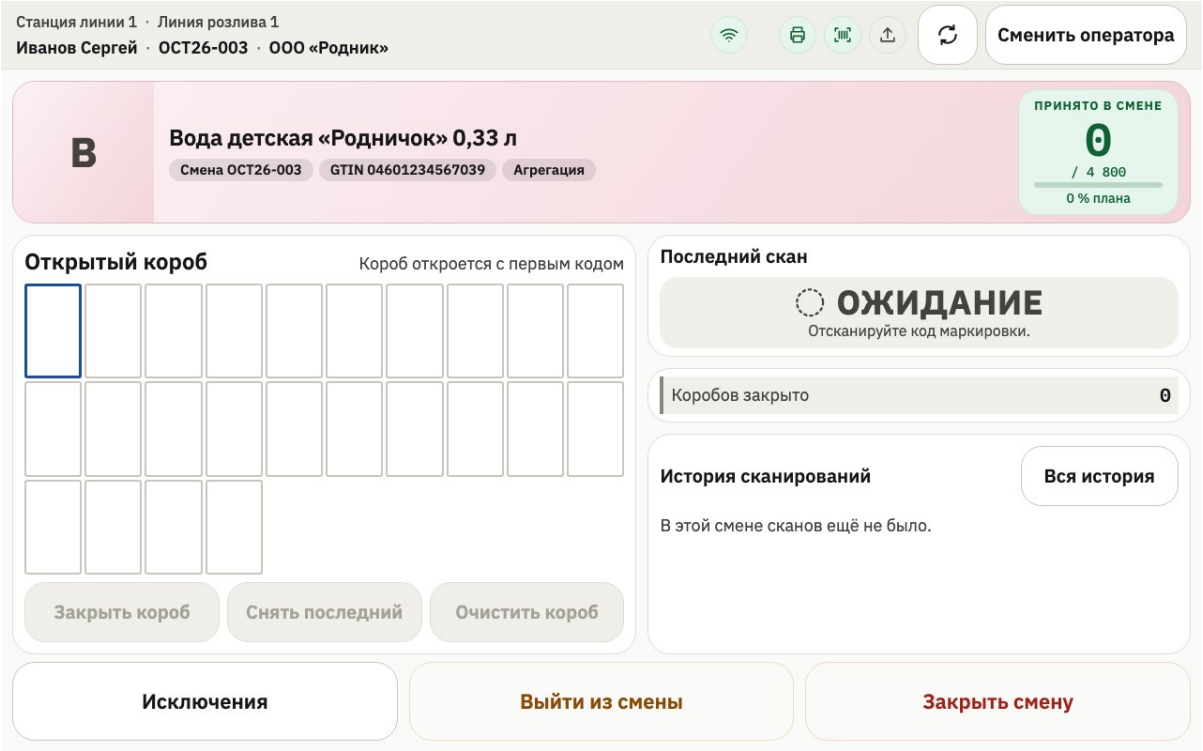

Work screen: the shift is open, the station waits for the first code

Expected result: The station is ready: scan the first marking code — the result appears under “Последний скан” (Last scan).

If another operator takes over, tap “Сменить оператора” (Change operator): the shift stays open and every recorded operation stays on the station. The new operator signs in as in section 3.

7. Common problems

The badge is not found — The station says “Бейдж не найден” (Badge not found). If the badge is new, wait for the station to sync with the host or contact an administrator. Meanwhile you can sign in with your personnel number and PIN.

The scanner read something other than a badge — The station says “Это код товара, а не бейдж” (This is a product code, not a badge) or “Это не похоже на бейдж” (This does not look like a badge). Hold the badge itself up to the scanner.

The scanner types in the Russian layout — The station says “Сканер набирает в русской раскладке”. Switch the station's keyboard layout to English and scan the badge again.

Signing in with a PIN is paused — Wait for the countdown to end or sign in with your badge. If the PIN is forgotten, an administrator changes it in the office.

Reference data is not yet loaded from the host — The station says “Справочники ещё не загружены с хоста”: it has not yet received the lists of operators, products and shifts. Check the connection indicator; if there is no connection, call a technician.

The shift you need is not in the list — The list shows only the shifts of this station's line. Create the shift (section 5) or ask your supervisor which line it is planned on.

The shift form has no “С паллетами” (With pallets) card — The product card does not say how many boxes go on a pallet, or the product has no fitting pallet label template. Ask an administrator to fix this in the office (MKR-INS-10), then create the shift again.

New shifts do not open — The station explains why: the trial period has ended, the site's license has expired, or the organization's INN does not match the license. Tell an administrator. A shift the station already runs can be continued.

If your problem is not listed above, contact your organization's administrator or Markiro support: hello@v-b.tech.