TITAN

Premium series

THREE PHASE

AUTOMATIC VOLTAGE REGULATOR

Ultra-Narrow Design To Save Space


Smart LED Display

INPUT VOLTAGE:266V-494V OUTPUT VOLTAGE:380+3%





Main PCBs shielding cover,
switch safety protection cover

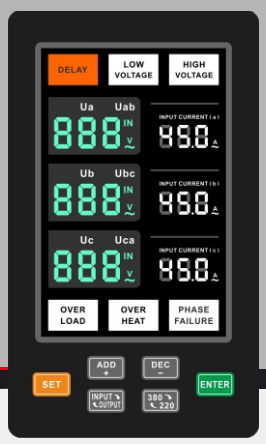

DIGITAL DISPLAY

PROTECTION

- With low/over protection
- Over load protection
- Over heat protection
- N-deficient protection
- Over current protection
- Phase sequence protection

Parameter

Type	TNS-10KVA	TNS-15KVA	TNS-20KVA	TNS-30KVA	TNS-40KVA	TNS-50KVA	TNS-60KVA	TNS-75KVA	TNS-100KVA
Rated power	8KW	12KW	16KW	24KW	32KW	40KW	48KW	60KW	80KW
System	Three-phase								
Input voltage range	266-494V								
Rated input current	12.1A	18.1A	24.2A	36.3A	48.4A	60.6A	72.7A	90.9A	121.2A
Output voltage	380V								
Efficiency	>96 %								
Compensation Duration	Continuous								
Adjustment speed	50 ms/V								
Dimensions WxDxH	415*260*757MM	560*285*827MM	620*320*877MM		700*400*1195MM			820*430*1305MM	
Weight	47KG	80KG	96.5KG	110.5KG	145KG	155KG	165KG	222KG	228KG

Standard features

Frequency	50Hz ±5% or 60Hz ±5%
Output voltage accuracy	±3%
Admitted load variation	Up to 80%
Cooling	Fan
Ambient temperature	-25/+45°C
Storage temperature	-25/+60°C
Max relative humidity	<95% (non condensing)
Admitted overload	110% 10min.
Color	2310
low voltage protection	when output lower than 326V±6V will start
Over voltage protection	when output more than 426V±6V will start
Over current protection	when current meet 100% capacity will start
Protection degree	IP 21
Instrumentation	LED
Installation	Indoor