Deutsche Power

XL-PLUS SERIES

LINE INTERACTIVE UPS

650VA ~ 3000VA (1/1)

SOHO &
I.T Grade UPS

LINE INTERACTIVE UPS

DP Electronics (Deutsche Power Co., Limited)

XL-PLUS Series (650VA~3000VA)

XL-PLUS Series, a Line-Interactive UPS is designed for user's required short back up with high reliability, durability and economical solution. Ideally for SOHO applications and many other applications of similar types.

Technology

XL-PLUS uses line interactive technology to produce a basic level of protection. This topology includes a transformer in series between the utility power source and the load, enabling the UPS to "interact" with the mains.

LCD

XL-PLUS has LCD in its front panel for easily viewing of different features directly from the UPS LCD. This LCD displays input / output voltages, input/output frequency, battery capacity , faults and many others features can be viewed.

Remote Management

XL-PLUS status information can be accessed securely from any computer on your IP-Based network. UPS history log, input /output voltages,
input/output frequency, battery capacity , faults and many others feature can be view remotely.

Compact Design

XL-PLUS compact design makes this UPS different from other similar Products.Its reduced dimensions is easily integrated into offices environment and low space areas.

Off Mode Charging

XL-PLUS has the ability to do off mode charging which means UPS can be insert for charging while powering off the on/off button. This feature provide the leverage to charge the UPS in non working hours while keeping the load off.

Cold Start

XL-PLUS is empowered with cold start function which enable the UPS to start directly on its batteries without providing the mains supply.



Wide Input Voltage Range AVR with Buck & Boost


XL-PLUS wide input range 140~300VAC for 650/1000VA and 162~290VAC for 2000VA make it suitable to use in the areas were voltages fluctuation is serious problem. The UPS automatically Buck & Boost as per input feedback.

Standards

Security:	CH0054132-2000,
Conductive Disturbance:	GB9254 1998/EN55022 CLASS B
Video Frequency Disturbance:	GB9254 1998/ EN55022 CLASS A

Application

Work Stations
Computer Peripherals
Point of Sale Equipment
Hubs, Routers

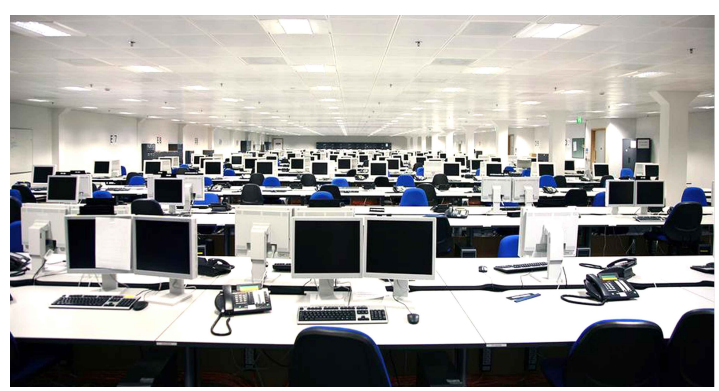

LINE INTERACTIVE UPS

TECHNICAL SPECIFICATION FOR XL-PLUS SERIES

MODEL							
Rating	XL-650	XL-800	XL-1000	XL-1200	XL-1500	XL-2000	XL-3000
VA	650	800	1000	1200	1500	2000	3000
INPUT							
Phase	110/120 VAC or 220/230/240 VAC						
Voltage Range (Buck & Boost AVR)	81-145 VAC / 162-290 VAC						
Frequency Range	60/50 Hz (Auto sensing)						
OUTPUT							
Output Voltage	110/120 VAC or 220/230/240 VAC						
Power Factor	0.6 (standard), 0.7 & 0.8 Available on request						
AC voltage Regulation	± 10%						
Frequency Range	60 Hz or 50 Hz ± 0.5 Hz						
Transfer Time	Typicle 2-6 ms						
Waveform (Batt. Mode)	Simulated Semi Sinewave						Pure Sinewave
BATTERY							
Battery Type & Number	12V/7Ah-9Ahx1		12V/7Ah-9Ahx2		12V/9Ahx2		12V/7Ahx6
Typical Recharge Time	2-3 hours recover to 90% capacity						
PROTECTION							
Full Protection	Surge, overload, discharge and overcharge protection						
INDICATORS							
LED / LCD Display LCD Display (optional)	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage Overload, Fault, and Low Battery						
PHYSICAL							
Dimension	287x100x142		397 x 146 x 205			495 x 150 x 250	
Net Weight (kgs)	4.25	4.75	11.1			11.5	24.8
ENVIRONMENT							
Humidity	0-90% RH @ 0-40 C (Non-condensing)						
Noise Level	Less then 40db						
MANAGEMENT							
Ports & Output Socket	USB/RS-232 Port (optional) 4xIEC(650/800VA) 6xIEC (1 KVA, 1.5 KVA &2KVA)						

DP Electronics (Deutsche Power Co. Limited) has a policy of continuous product development and improvement and therefore reserve the right to vary any information without prior notes.

DP Electronics (Deutsche Power Co., Limited)

DP ELECTRONICS (DEUTSCHE POWER CO., LIMITED)

Germany Head Office

DP electronics (Deutsche Power Co., Limited) Klon, Germany.
Phone: +49-221-26016266
Fax: +49-221-26016267
Email: enquiries@deutschepower.de

Hong Kong Office

RM 1701(057), 17/F, HeNan Building No90, Wan Chai, Hong Kong.
Phone: +86-755-82610239
Fax: +86-755-82610233
helenlong@deutschepower.de