Mann Hwa 曼華

电机使用说明

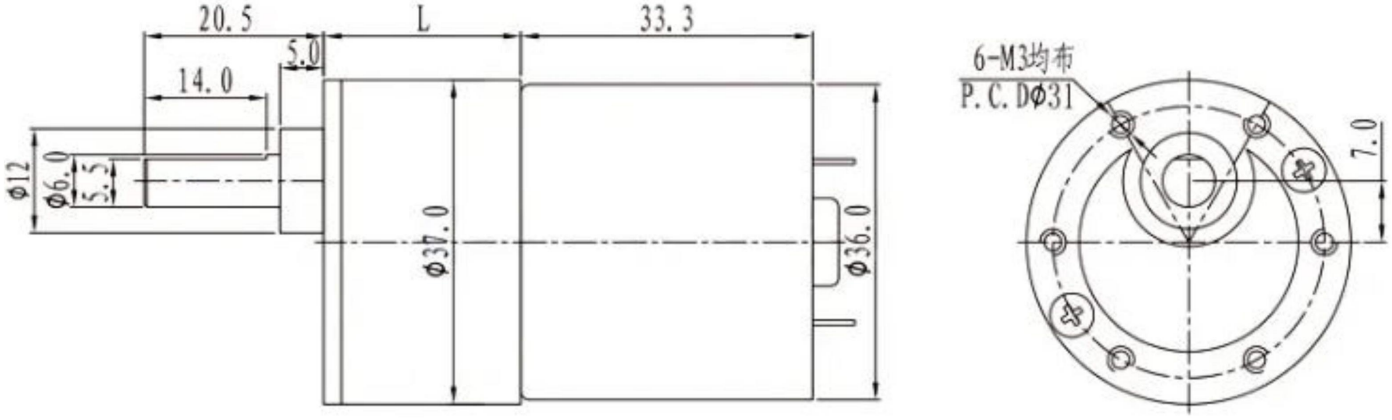
Motor usage instructions

注意事项/Precautions

匹配额定电压 / 频率，接线牢固、可靠接地，断电检修。
严防堵转、过载，负载不超额定转矩，忌频繁启停。
安装平整紧固，轴系对中同心，禁止敲击轴端、硬性顶推。
运行监测温 / 噪 / 振，异温 / 异响 / 卡滞立即断电排查。
适配清洁干燥环境，避粉尘、腐蚀、凝露，做好防护。
按规范加注润滑脂，非专业勿拆解，配件更换用同规格。

Match rated voltage/frequency, connect firmly and reliably, and perform power-off maintenance.
Strictly prevent stalling and overload, ensure the load does not exceed the rated torque, and avoid frequent starting and stopping.
Install smoothly and securely, with the axis aligned and concentric. Do not strike the shaft end or forcefully push it.
Monitor temperature/noise/vibration during operation, and immediately cut off power for troubleshooting in case of abnormal temperature/noise/jamming.
Adapt to clean and dry environments, avoid dust, corrosion, and condensation, and take protective measures.
Add lubricating grease according to the specifications. Do not disassemble it unless it is a professional. Replace parts with the same specifications.


DC:24V5000rlmin
1711204S


20.5
L
33.3
5.0
14.0
φ12
φ6.0
5.5
φ37.0
φ36.0
6-M3均布
P.C.DΦ31
7.0

Form	Reduction ratio	1/21	1/48	1/53	1/113	1/263	1/352	1/641
ZYTD-520 (12V-3500R)	No load speed（r/min)	165	72	65	30	13	10	5
	Load speed（r/min)	135	59	53	25	11	9	5
	Load moment （kgf.cm)	0.95	2	2.2	4	8	8	10
ZYTD-520 (24V-5000R)	No load speed（r/min)	240	105	94	44	19	14	8
	Load speed（r/min)	200	87	79	37	16	13	7
	Load moment （kgf.cm)	1	2.1	2.3	4.2	8	8	10
	Power supply positive connection + terminal	CW	CCW		CW	CCW		CW

Reduction ratio	L	Series	Rated torque	
	mm		mN.m	kgf.cm
1/21	22.5	3	245	2.5
1/48 - 1/53	24.5	4	392	4
1/113	26.5	5	588	6
1/263 - 1/352	29.5	6	784	8
1/641	30.5	7	980	10

	Voltage	No load		load			Rotation direction
	DC	current (mA)	speed (r/min)	moment (gf.cm)	current (mA)	speed (r/min)	
ZYTD-520	12V	60	3450	65	250	2800	CCW
ZYTD-520	24V	40	5000	70	190	4150	CCW

Model	Rated Voltage	Label speed	No load speed	Motor speed (rpm)	Reduction ratio
B37RG981i	12V	2.5R	2.5R	2500	981:1
B37RG981i	12V	5R	5.5R	5000	981:1
B37RG516i	12V	10R	11R	5500	516:1
B37RG314i	12V	15R	16R	5000	314:1
B37RG221i	12V	20R	22R	5000	221:1
B37RG148i	12V	30R	33R	5000	148:1
B37RG111i	12V	45R	45R	5000	111:1
B37RG94.85i	12V	50R	52R	5000	94.85:1
B37RG57.7i	12V	60R	62R	3500	57.7:1
B37RG57.7i	12V	87R	87R	5000	57.7:1
B37RG47.5i	12V	100R	105R	5000	47.5:1
B37RG40.6i	12V	120R	123R	5000	40.6:1
B37RG31i	12V	150R	160R	5000	31:1
B37RG22i	12V	200R	227R	5000	22:1
B37RG17.4i	12V	300R	285R	5000	17.4:1
B37RG11.8i	12V	400R	422R	5000	11.8:1
B37RG8.7i	12V	570R	570R	5000	8.7:1
B37RG8.7i	12V	630R	630R	5500	8.7:1
B37RG3i	12V	1000R	1000R	3000	3:1
B37RG981i	24V	2.5R	2.5R	2500	981:1
B37RG981i	24V	5R	5R	5000	981:1
B37RG314i	24V	10R	11R	3500	314:1
B37RG314i	24V	15R	16R	5000	314:1
B37RG221i	24V	20R	22R	5000	221:1
B37RG148i	24V	30R	33R	5000	148:1
B37RG0111i	24V	45R	45R	5000	111:1
B37RG94.85i	24V	50R	52R	5000	94.85:1
B37RG94.85i	24V	60R	63R	6000	94.85:1
B37RG57.7i	24V	87R	87R	5000	57.7:1
B37RG47.5i	24V	100R	105R	5000	47.5:1
B37RG40.6i	24V	120R	123R	5000	40.6:1
B37RG31i	24V	150R	160R	5000	31:1
B37RG22i	24V	200R	227R	5000	22:1
B37RG17.4i	24V	300R	285R	5000	17.4:1
B37RG13.48i	24V	370R	370R	5000	13.48:1
B37RG8.7i	24V	570R	570R	5000	8.7:1
B37RG3i	24V	1150R	1165R	3500	3:1