

## 250W, 9 to 53V Input Non-Isolated Step Down DC-DC Converter

<https://product.tdk.com/en/power/i6a>  
[www.emea.lambda.tdk.com/i6a](http://www.emea.lambda.tdk.com/i6a)



Industrial



Test




COMM



Broadcast



Robotics

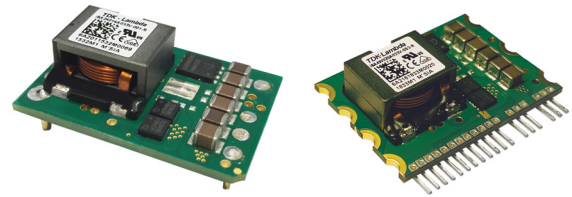

The i6A4W series of non-isolated DC-DC step-down converters are ideal for creating additional high current output voltage rails from a single output 12V, 24V or 48V AC-DC or DC-DC power supply. The highly efficient i6A4W series accepts a very wide DC input and has a wide output adjustment range, with a choice of 1/16th brick footprint or SIP package. Output trim, remote sense, negative or positive logic remote On-Off comes as standard features. Power good, frequency synchronization and output sequencing are optional features.

### Features

- Up to 250W in a 1/16th brick or SIP package
- Very high Efficiency up to 97%
- Wide Output Adjustment 3.3 to 15V & 3.3 to 40V
- Minimal External Components Needed
- Low Airflow With Minimal Derating Requirements

### Benefits

- Very High Power Density
- Easier Thermal Management
- One Part For Multiple Applications
- Less Board Area Required
- Easier To Cool In End System

### Model Selector

Model	Output Voltage (V) <sup>(1)</sup>	Max Current (A)	Max Power (W)	Positive Logic On/Off	Negative Logic On/Off	Full Feature	Package
<a href="#">i6A4W010A033V-001-R</a>	3.3 to 40	10	250	-	Yes	-	DIP
<a href="#">i6A4W010A033V-0S1-R</a>	3.3 to 40	10	250	-	Yes	-	SIP
<a href="#">i6A4W020A033V-000-R</a>	3.3 to 15	20	250	Yes	-	-	DIP
<a href="#">i6A4W020A033V-001-R</a>	3.3 to 15	20	250	-	Yes	-	DIP
<a href="#">i6A4W020A033V-0S1-R</a>	3.3 to 15	20	250	-	Yes	-	SIP
<a href="#">i6A4W020A033V-002-R</a>	3.3 to 15	20	250	Yes	-	Yes	DIP
<a href="#">i6A4W020A033V-003-R</a>	3.3 to 15	20	250	-	Yes	Yes	DIP
<a href="#">i6A4W020A033V-0S3-R</a>	3.3 to 15	20	250	-	Yes	Yes	SIP
<a href="#">i6A4W020A033V-005-R</a>	3.3 to 15	20	250	-	Yes	Yes <sup>(2)</sup>	DIP

Preferred model

### Related Products


Model	Part Number	Description
Evaluation Kits	<a href="#">i6A20A-001-EVK-S1PX</a>	Populated with i6A4W020A033V-001-R module
	<a href="#">i6A20A-001-EVK-S1CC</a>	Populated with i6A4W020A033V-001-R module set for constant current operation
	<a href="#">i6A10A-001-EVK-S1PX</a>	Populated with i6A4W010A033V-001-R module
	<a href="#">i6A10A-001-EVK-S1CC</a>	Populated with i6A4W010A033V-001-R module set for constant current operation

Specification			
Model		i6A4W010A033V	i6A4W020A033V
Input			
Input Voltage Range	Vdc	9 to 53V (Turn on at 8V typ)	
Input Current	A	20A maximum	
Efficiency	%	94 - 97.5	90 - 97.0
Safety Agency Certifications	-	IEC/UL/CSA/EN 62368-1, IEC/UL/CSA/EN 60950-1, CE Mark	
Output			
Output Voltage Tolerance	%	±4	
Switching Frequency	kHz	400	
Line Regulation	%	0.3	0.4
Load Regulation	%	0.9	1.2
External Load Capacitance	uF	0 - 1500	
Output Ripple & Noise (pk-pk)	mV	50	20
Overcurrent Protection Threshold	A	15	27
Remote On / Off	-	See options table	
Remote Sense	-	(+) Sense, compensating up to 5% of output voltage	
Power Good	-	Optional (Full Feature Version)	
Frequency Synchronization	-	Optional (Full Feature Version)	
Output Sequencing	-	Optional (Full Feature Version)	
Parallel Operation	-	Not possible	
Series operation	-	Not possible	
Environmental			
Operating Temperature	°C	-40 to 125 (see thermal data on website)	
Storage Temperature	°C	-55 to 125	
Cooling	-	Convection or forced air	
Other			
Weight	g	15	
Size (LxWxH)	mm	DIP Version: 33 x 22.9 x 12.1, SIP Version: 33 x 11.4 x 24.8	
Size (LxWxH)	In	DIP Version: 1.30 x 0.9 x 0.74, SIP Version: 1.30 x 0.45 x 0.98	
MTBF - Telcordia SR-332	-	> 12 Mhrs; 100% Load; Ta = 40 °C	
Warranty	yrs	3	

**Notes**See website for detailed [specifications](#).


(1) Output voltage cannot exceed input voltage. Refer to Input vs. Output graphs provided.

(2) Full Feature module but without the SEQ (Sequencing) Pin 34 installed. This eliminates the need for external pull-up resistor when Sequencing feature is not being used.

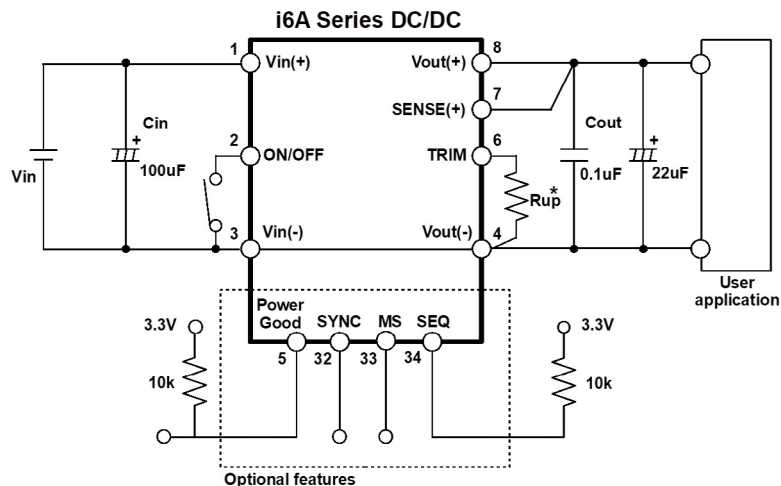
(3) If the Sequencing feature will not be used, the SEQ Pin 34 needs to be tied to a 1.8-3.3V source via a 10k resistor. See [Full specification](#) for details.**Typical Application Circuit****Recommendation**

1. TRIM resistor Rup should be connected to the i6A module as close as possible.

## Output vs. Input Voltage Operating Range

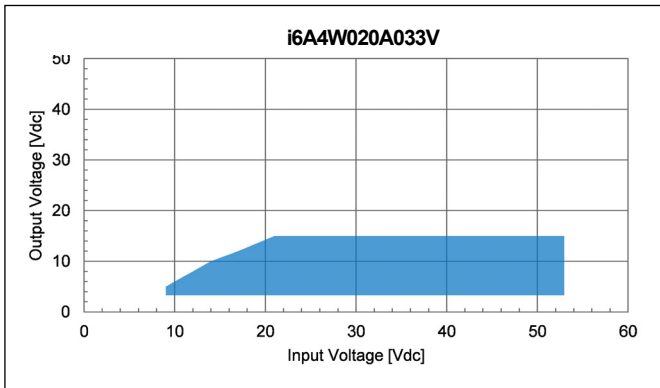


## Output vs. Input Voltage Operating Range

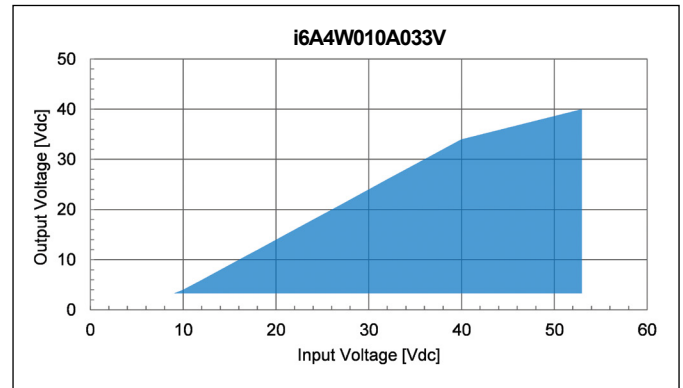

## Mechanical Specification (Horizontal Mount Through Hole)

### Recommended Hole Pattern (top view)

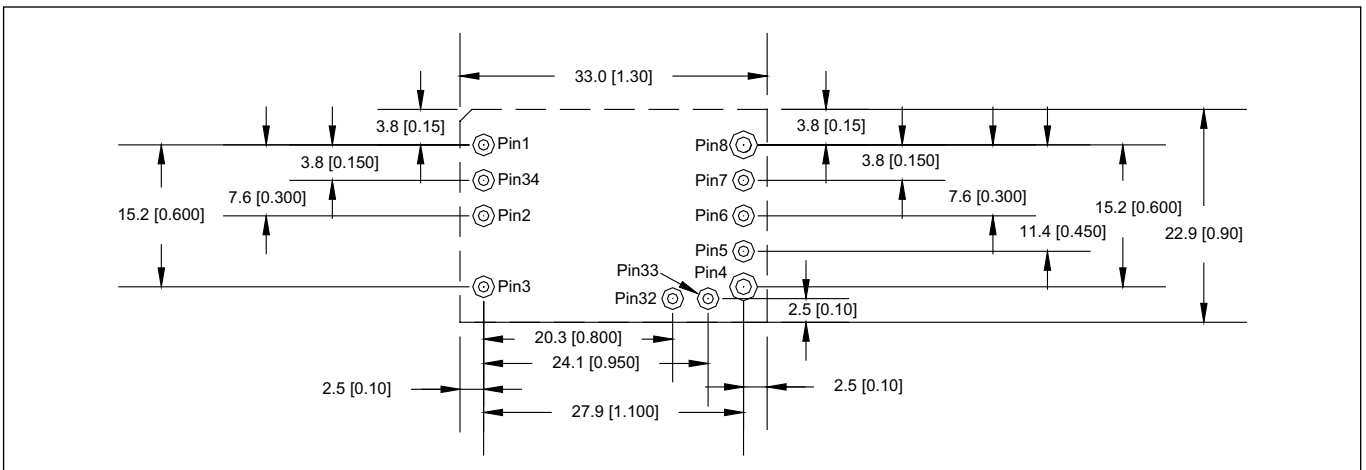


### Pinout

PIN	Function	PIN	Function
1	VIN (+)	7	SENSE (+)
2	ON / OFF	8	VOUT (+)
3	VIN (-)	32	Sync (Option)
4	VOUT (-)	33	MS (Option)
5	PWR GOOD (Option)	34	SEQ (Option)
6	TRIM		


Pin base material is brass or copper with gold over nickel plating.

### Mechanical Specification

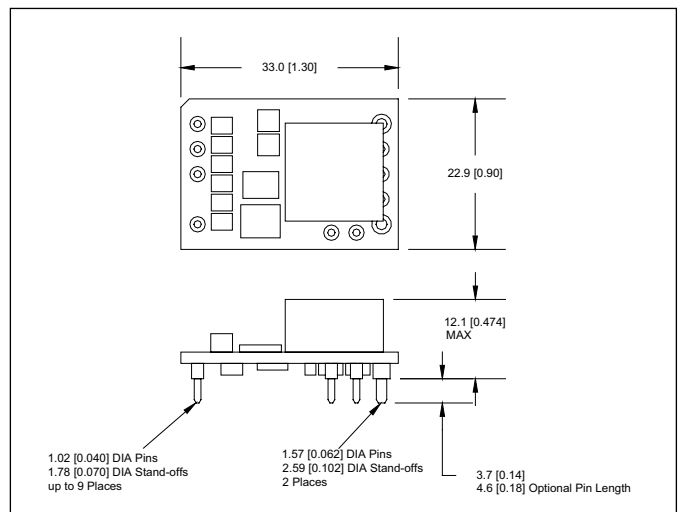

## Mechanical Specification (SIP - Through Hole)


## Recommended Hole Pattern (top view)

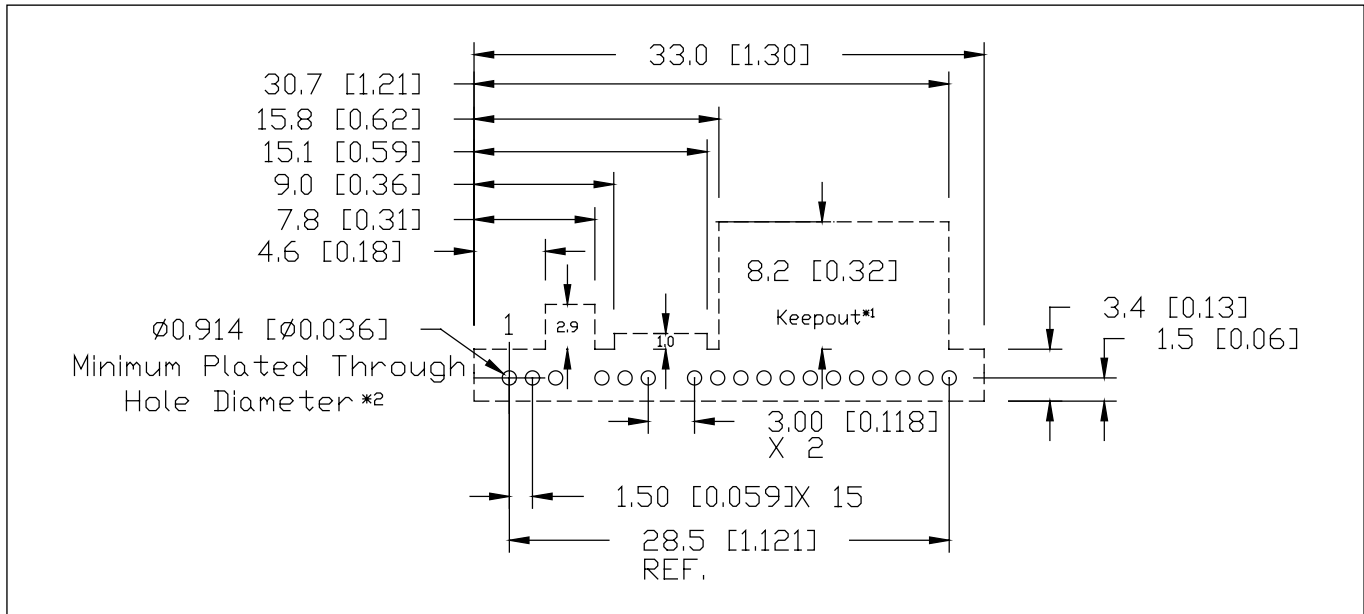

## Pinout

PIN	Function	PIN	Function
1	VIN (+)	10	TRIM
2	VIN (+)	11	VOUT (-)
3	VIN (+)	12	VOUT (-)
4	VIN (-)	13	VOUT (-)
5	ON / OFF	14	SENSE (+)
6	MS (Option)	15	VOUT (+)
7	Sync (Option)	16	VOUT (+)
8	SEQ (Option)	17	VOUT (+)
9	PWR GOOD (Option)	18	VOUT (+)

## Mechanical Specification

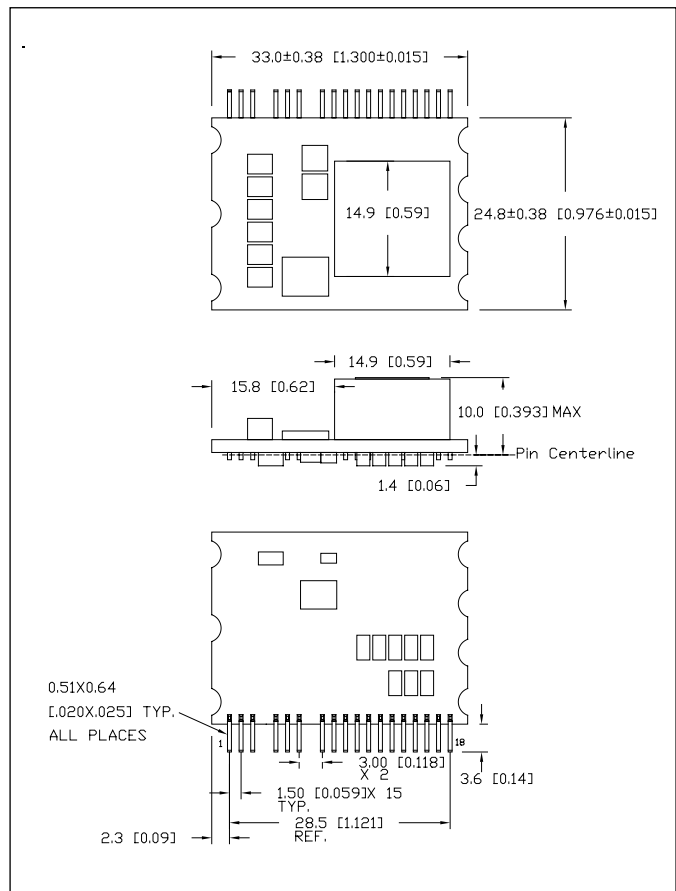

Pin base material is brass or copper with matte tin over nickel plating.



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info.germany@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at




## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
powersolutions@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tts.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

