

OPERATING INSTRUCTION SZW26 Series

Universal Change-over Switch

1. Purpose

The SZW26 series transfer switch is mainly suitable for electrical circuits with AC 50Hz, rated working voltage of 440V and below, and rated current up to 160A, for manual infrequent use. Connecting or disconnecting circuits can be used for control or conversion purposes, as well as directly controlling three-phase asynchronous motors and for master control and circuit measurement purposes. The product has a wide range of applications and can be used as a circuit control switch, tester, etc. Test equipment switches, motor control switches, master control switches, and conversion switches for welding machines. The product complies with the standard EN 60947-5-1:2017.

2. Normal Operating Conditions

- The upper limit and lower limit of ambient air temperature are $+40^{\circ}\text{C}$ and -25°C respectively. The average temperature within 24 hours does not exceed $+35^{\circ}\text{C}$.
- Altitude does not exceed 2000m.
- When ambient air temperature is $+40^{\circ}\text{C}$, air relative humidity should not exceed 50%. At lower temperatures, higher relative humidity is allowed. In time of the wettest month, the monthly average minimum humidity does not exceed $+25^{\circ}\text{C}$, and the monthly average maximum relative humidity does not exceed 90%.
- Grade of pollution is 3, and installation category is III.

3. Product Model and its Meaning

SZW • 26 - ☐ / ☐ ☐ ☐ • ☐

— Pole number Use 2,3,4 to denote "2-pole", "3-pole", "4-pole" respectively
 — Position number
 — Operation mode
 — Specification code (approximately confirmed as free air heating current value)
 — Design code
 — Change-over switch

10A, 20A, 25A, 32A, 63A, 125A, 160A

Classification	Classification by Operation Mode	Classified by contact system section number
1. Change-over switch used for main circuit change-over	1. Positioning (Latching) Type	1. Change-over switch used for main circuit change-over has 1-4 sections
2. Change-over switch used for directly controlling motor	2. Self-Returning (Momentary) Type 3. Positioning & Self-Returning (Combination) Type	2. Change-over switch used for directly controlling motor has 1-8 sections

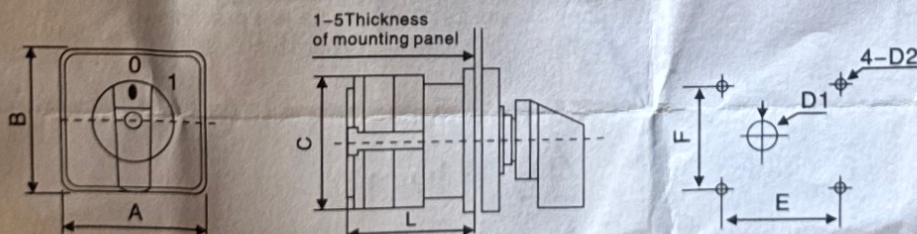
Note: Change-over switch used for main circuit usually adopts 60° change-over mode.

4. Main Pole Number Parameters


Model specification	SZW26-10	SZW26-20	SZW26-25	SZW26-32 SZW26-40	SZW26-63	SZW26-125	SZW26-160
Rated insulation voltage UI V	660/690	660/690	660/690	660/690	660/690	660/690	660/690
Prescribed heating current Ith A	10	20	25	32/40	63	125	160
Rated working voltage Ue V	240 440	24 110 240 440	24 110 240 440	240 440	240 440	240 440	240 440
Rated working current Ie							
AC-15 A	2.5 1.5	5 4	8 5	14 16			
AC-3 A	5.5 5.5	11 11	15 15	22 22	36 36	75 75	95 95
DC-13 A		12 0.4 0.4	20 0.5 0.5				

Model Specifications	Terminal Screw Gauge	Connection Wire Range	Tightening Torque
SZW 26-10	M2.5	0.75-1.5mm ²	0.4N·m
SZW 26-20	M3	1.0-2.5mm ²	0.6N·m
SZW 26-25	M3.5	1.5-4.0mm ²	0.8N·m
SZW 26-32/40	M4	2.5-6.0mm ²	1.2N·m
SZW 26-63	M6	6.0-16mm ²	2.5N·m
SZW 26-125	M6	35-50mm ²	2.5N·m
SZW 26-160	M8	50-75mm ²	6.0N·m


5. External Dimension and Installation Dimension



Classified by handle type




Model Specifications	Dimensions & Appearance				Installation Dimensions			
	A	B	C	L	E	F	D1	D2
SZW 26-10	30	30	28	37+8n	20		Φ8	Φ3.5
SZW 26-20	48	48	43	33+10n	36	36	Φ10	Φ4.5
SZW 26-25	48	48	45.5	37+13n	36	36	Φ10	Φ4.5
SZW 26-32	64	64	58	40+13n	48	48	Φ10	Φ4.5
SZW 26-40	64	64	58	40+13n	48	48	Φ10	Φ4.5
SZW 26-63	64	64	66	52+22n	48	48	Φ10	Φ4.5
SZW 26-125	88	88	84	63+27n	68	68	Φ13	Φ6
SZW 26-160	88	88	88	69+33n	68	68	Φ13	Φ6

**CET PRODUCT SERVICE SP. Z O.O.**

Ul. Długa 33 102
Zgierz
Postal Code: 95-100 Poland
info@cetproduct.com

IMPORTER/MANUFACTURER

yueqingshibaomandianqiyouxiangongsi
qianqiao cun, wengyang jiedao
yueqing shi, zhejiang sheng, China
325600
info@baomain.com
86-13676574828
XUTENG CHEN

**CET PRODUCT SERVICE LTD.**

Beacon House Stokenchurch Business Park,
Ibstone Rd, Stokenchurch
High Wycombe HP14 3FE UK
info@cetproduct.com

MADE IN CHINA**English****Warning**

Before powering on the device, ensure that the wiring is correct to avoid any potential hazards.

Svenska**Varning**

Innan du slår på enheten, se till att kabeldragningen är korrekt för att undvika eventuella faror.

Deutsch**Achtung**

Bevor Sie das Gerät einschalten, vergewissern Sie sich dass die Verkabelung korrekt ist, um mögliche Gefahren zu vermeiden.

Nederlands**Waarschuwing**

Zorg ervoor dat de bedrading correct is voordat u het apparaat inschakelt, om mogelijke gevaren te voorkomen.

Français**Attention**

Avant de mettre l'appareil sous tension, assurez-vous que le câblage est correct pour éviter tout danger potentiel.

Polski**Ostrzeżenie**

Przed włączeniem urządzenia upewnij się, że okablowanie jest prawidłowe, aby uniknąć możliwych zagrożeń.

Español**Advertencia**

Antes de encender el dispositivo, asegúrese de que el cableado sea correcto para evitar cualquier peligro potencial.

Türkçe**Uyarı**

Cihazı çalıştırmadan önce, olası tehlikeleri önlemek için kablajın doğru olduğundan emin olun.

Italiano**Attenzione**

Prima di accendere il dispositivo, assicurarsi che il cablaggio sia corretto per evitare potenziali pericoli.

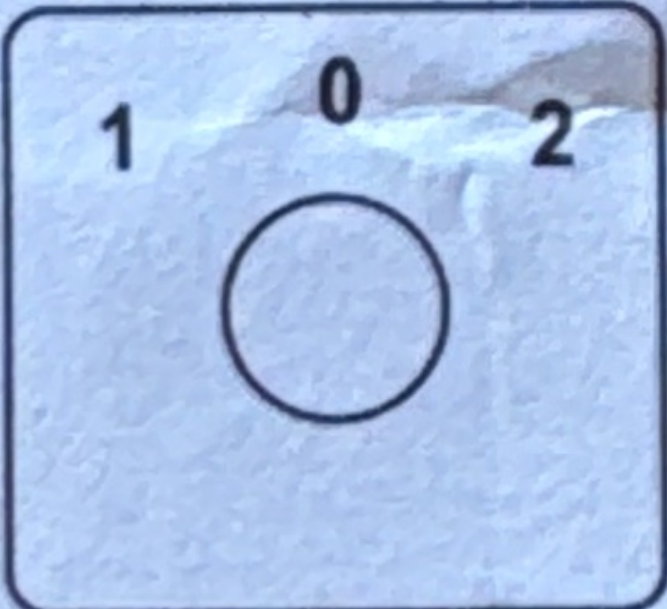
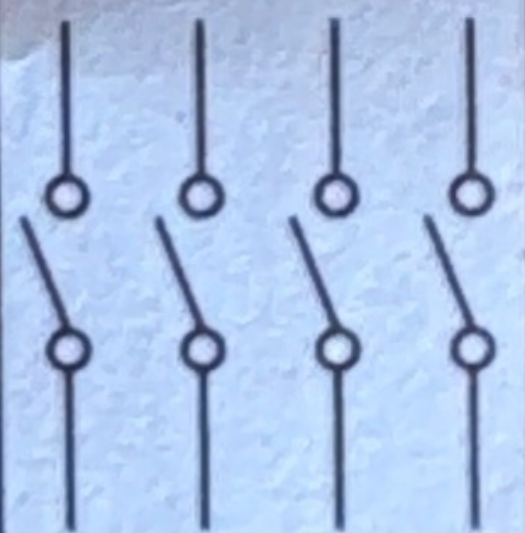
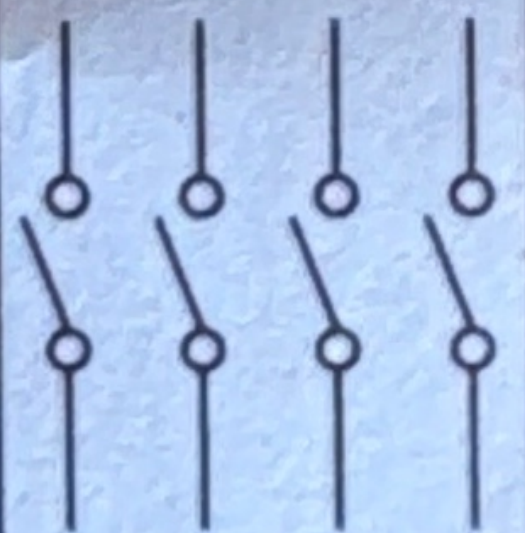
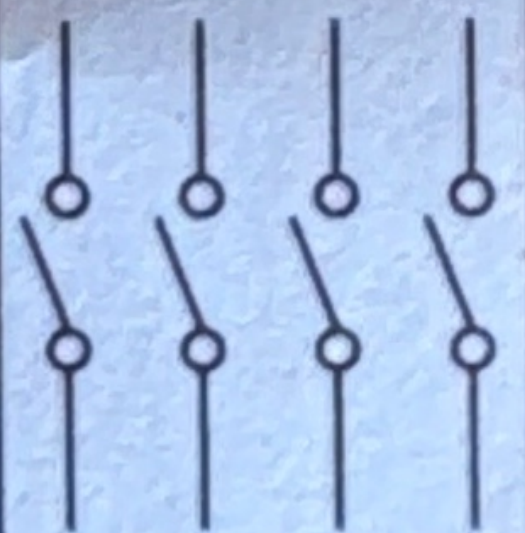
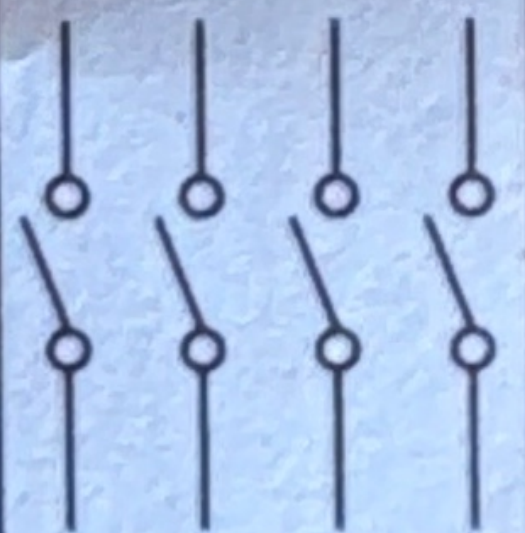
日本語**警告**

装置の電源を入れる前に、配線が正しいことを確認し、潜在的な危険を回避してください。

TIP

Please connect according to internal structure drawing of product.

"X" position means power-on.

 Angle: 45°	1	3	5	7
				
	2	4	6	8
Position 1	X		X	
Position 0				
Position 2		X		X