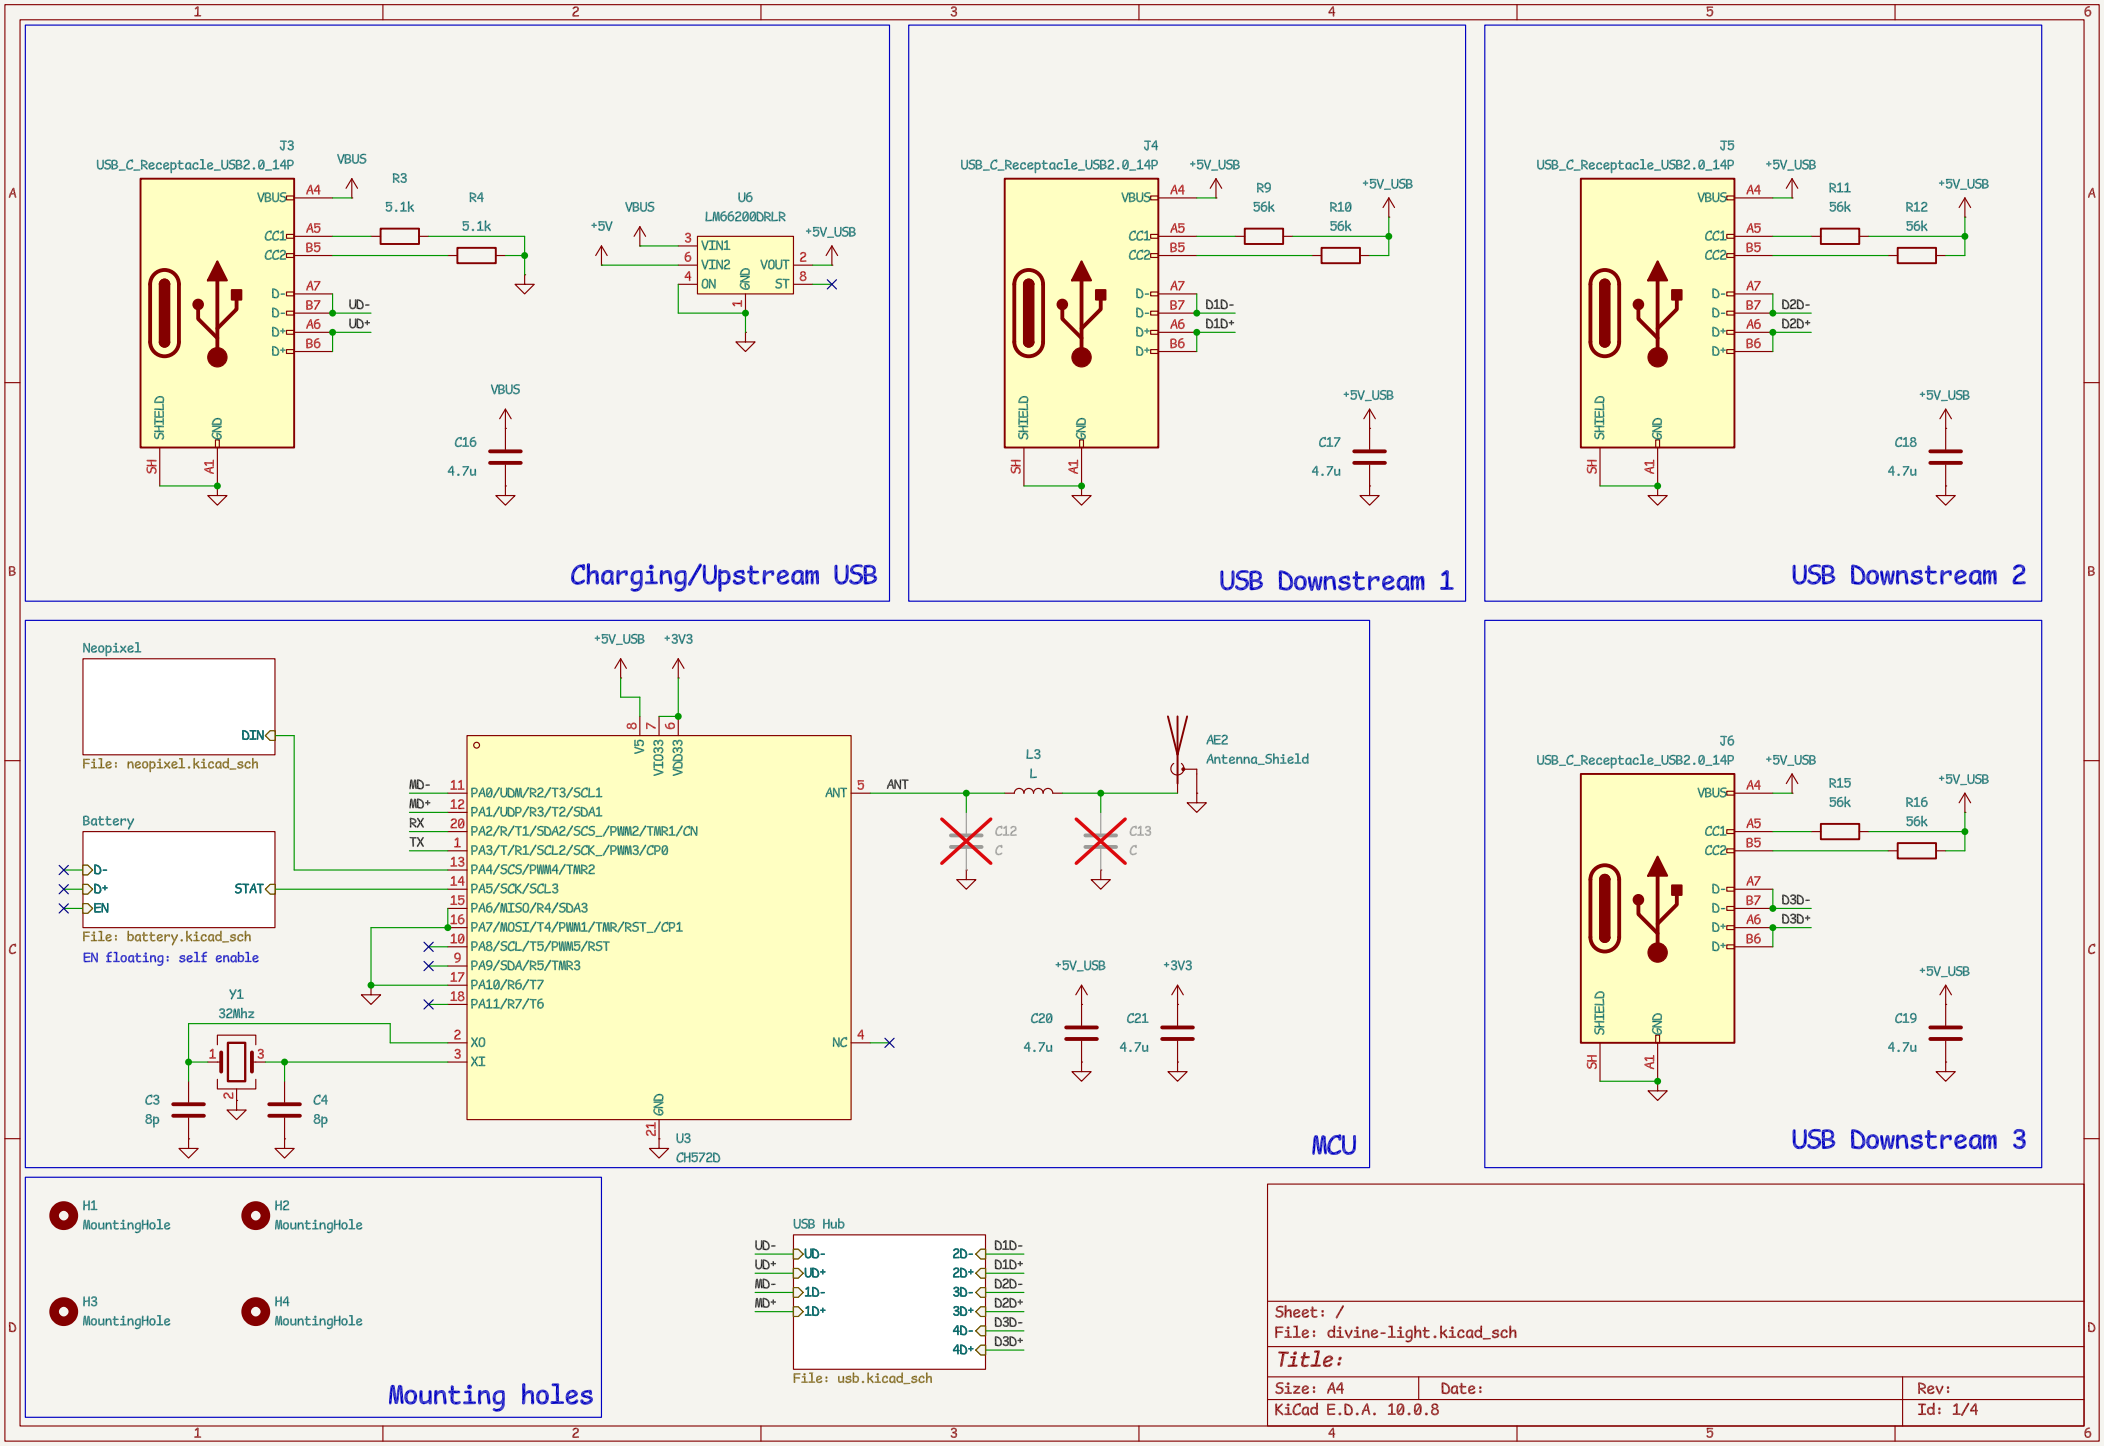
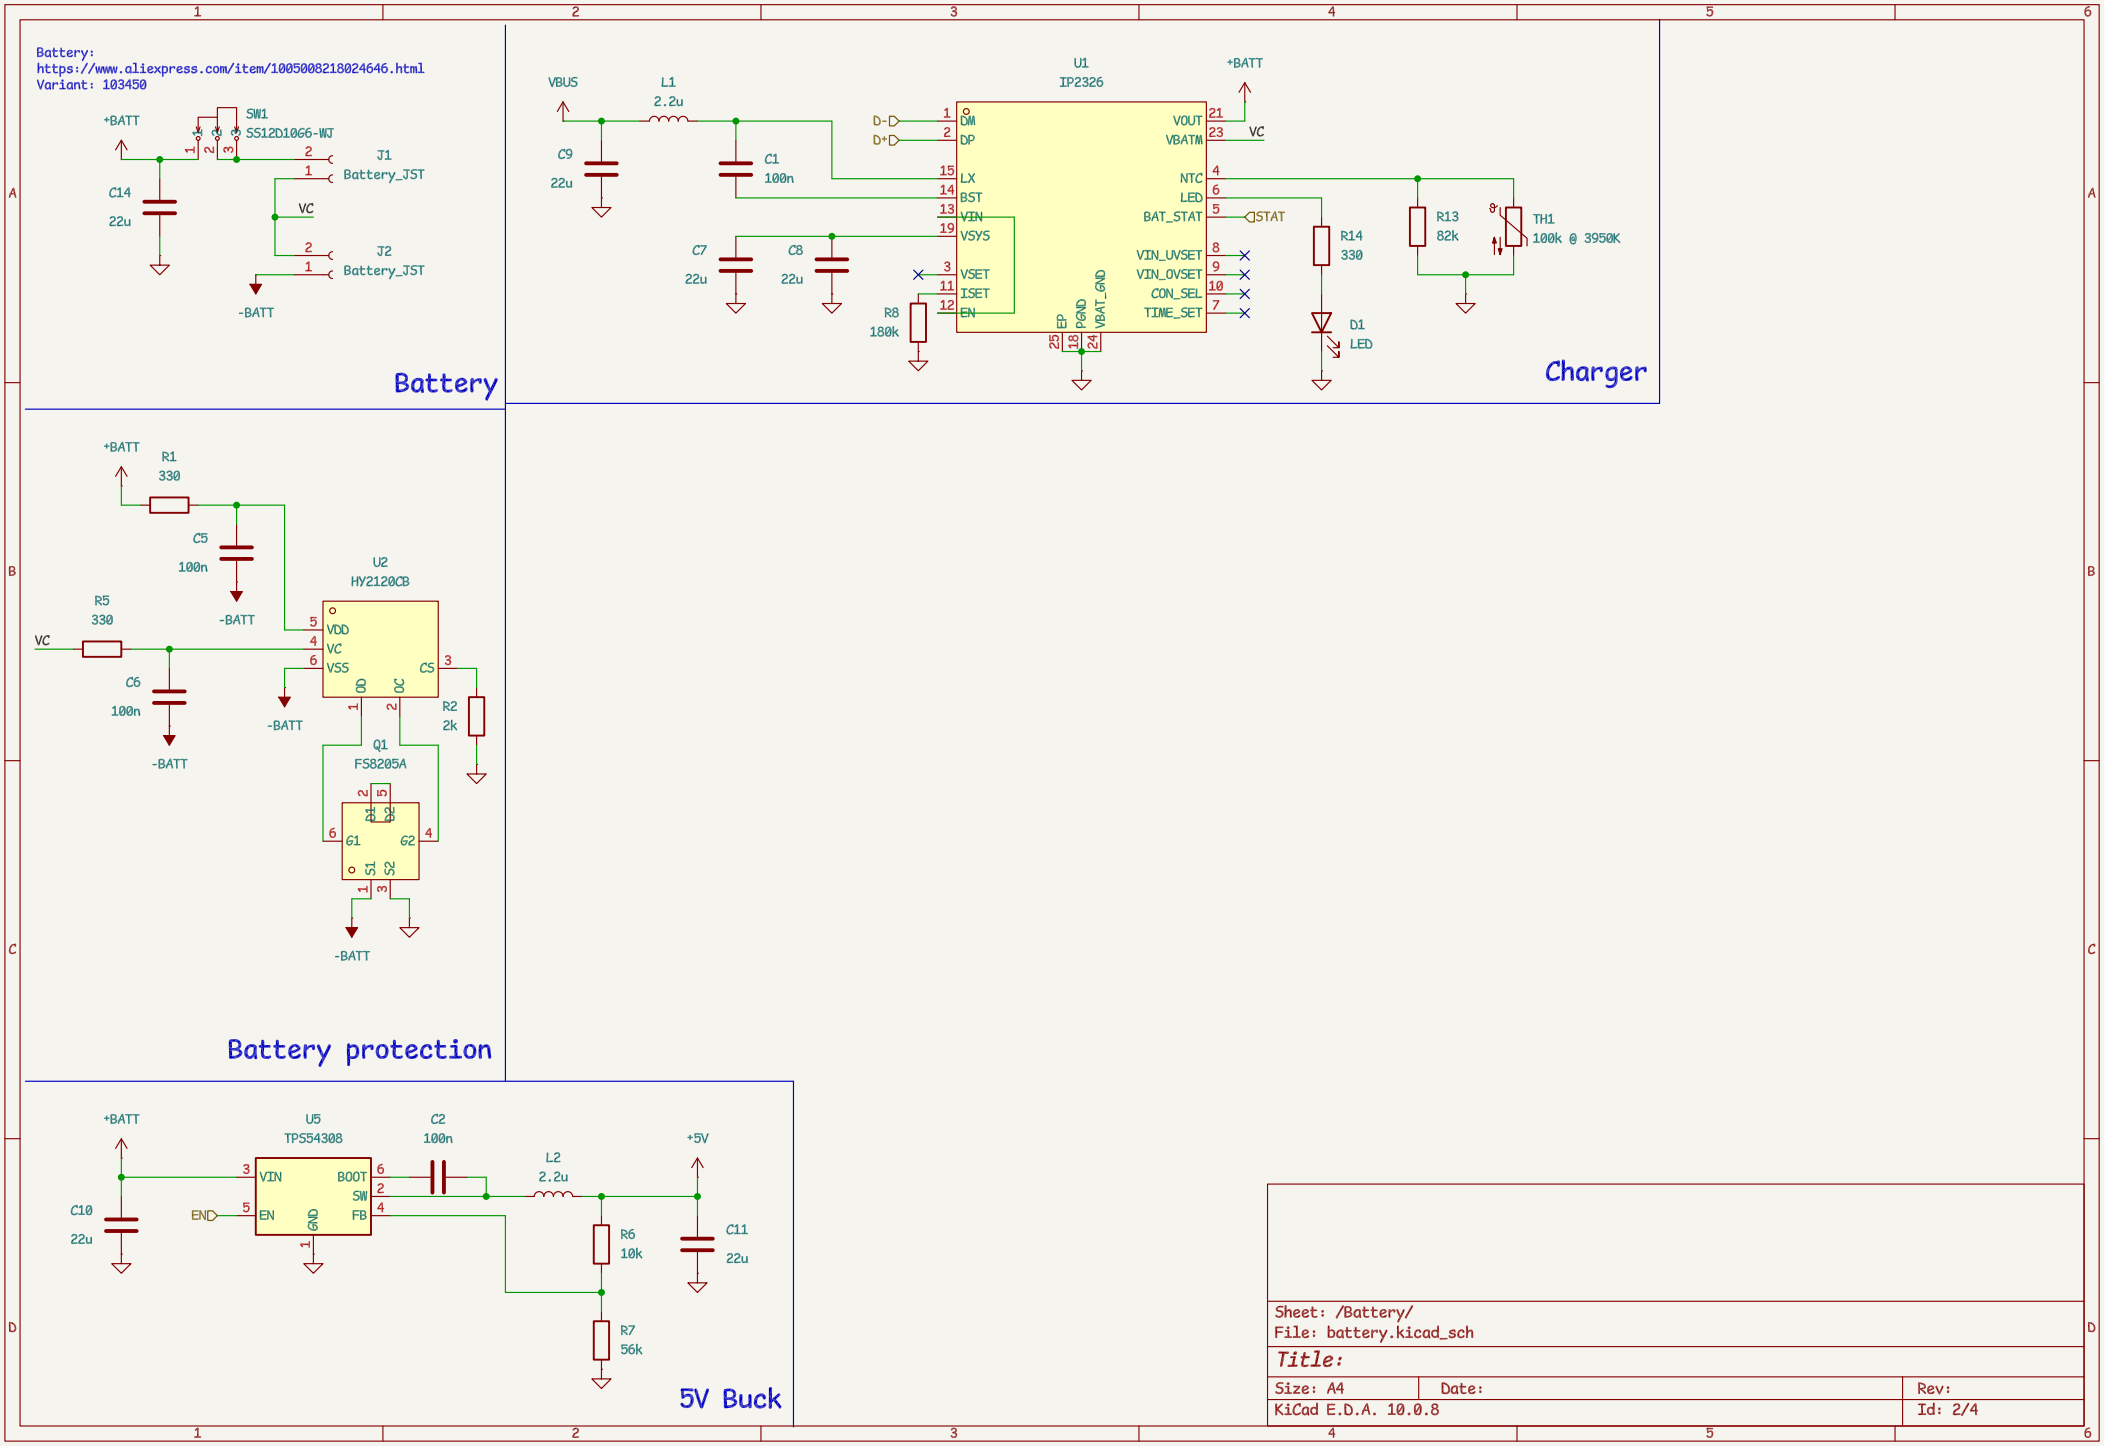
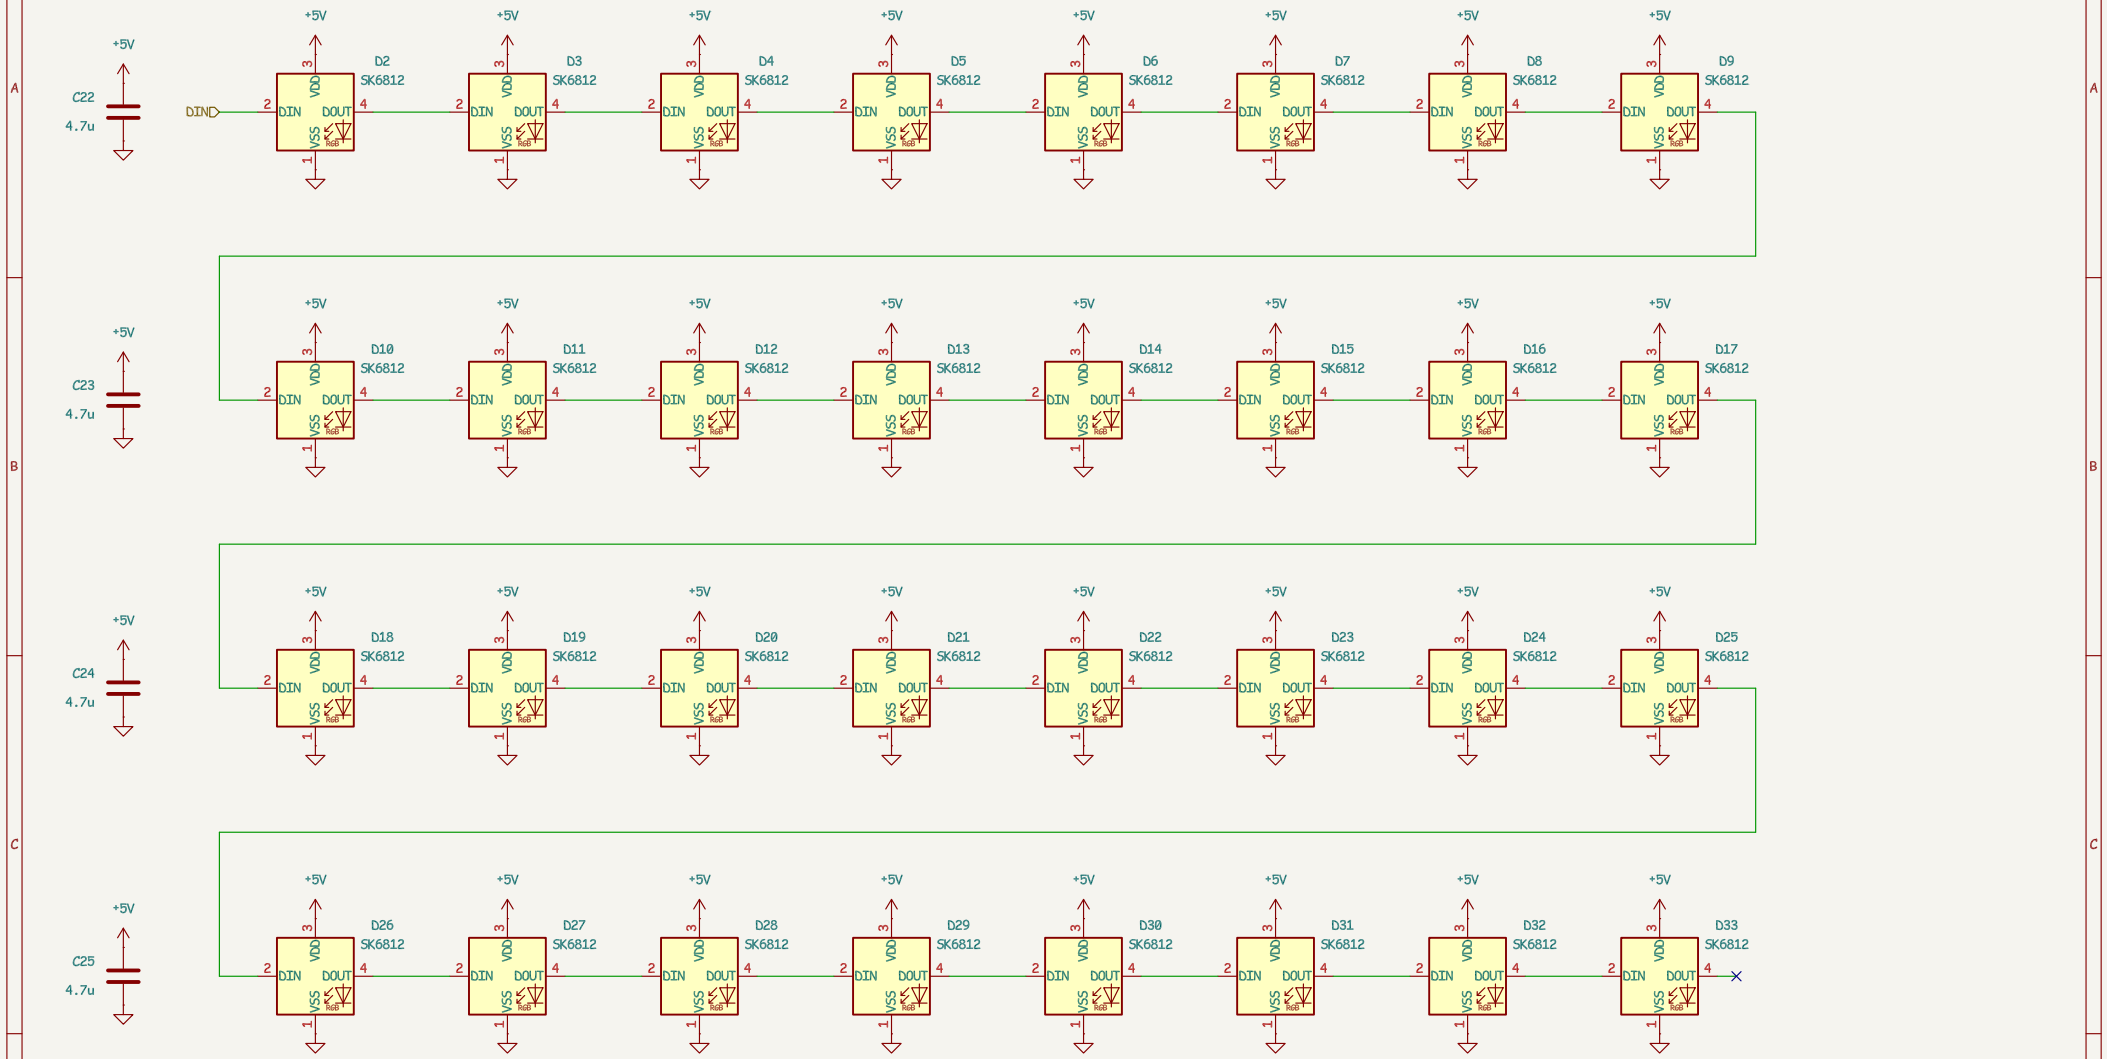
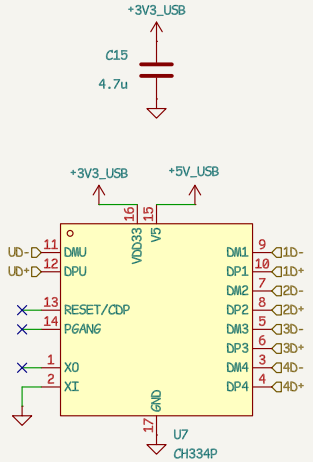

Charging/Upstream USB
J3
USB_C_Receptacle_USB2.0_14P
VBUS
R3
5.1k
R4
5.1k
U6
LM66200DRLR
+5V
+5V_USB
C16
4.7u
USB Downstream 1
J4
R9
56k
R10
56k
D1D-
D1D+
C17
4.7u
USB Downstream 2
J5
R11
56k
R12
56k
D2D-
D2D+
C18
4.7u
MCU
Neopixel
DIN
File: neopixel.kicad_sch
Battery
STAT
File: battery.kicad_sch
EN floating: self enable
+3V3
PA0/UDM/R2/T3/SCL1
PA1/UDP/R3/T2/SDA1
PA2/R/T1/SDA2/SCS_/PWM2/TMR1/CN
PA3/T/R1/SCL2/SCK_/PWM3/CP0
PA4/SCS/PWM4/TMR2
PA5/SCK/SCL3
PA6/MISO/R4/SDA3
PA7/MOSI/T4/PWM1/TMR/RST_/CP1
PA8/SCL/T5/PWM5/RST
PA9/SDA/R5/TMR3
PA10/R6/T7
PA11/R7/T6
ANT
NC
L3
AE2
Antenna_Shield
C12
C13
C20
C21
Y1
32Mhz
C3
8p
C4
8p
U3
CH572D
USB Downstream 3
J6
R15
56k
R16
56k
D3D-
D3D+
C19
4.7u
Mounting holes
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
USB Hub
File: usb.kicad_sch
Sheet: /
File: divine-light.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.8
Id: 1/4


Battery:
https://www.aliexpress.com/item/1005008218024646.html
Variant: 103450
+BATT
SW1
SS12D10G6-WT
J1
Battery_JST
C14
22u
VC
J2
Battery_JST
-BATT
Battery
VBUS
L1
2.2u
U1
IP2326
+BATT
D-
D+
C9
22u
C1
100n
C7
22u
C8
22u
R8
180k
DM
DP
LX
BST
VIN
VSYS
VSET
ISET
EN
VOUT
VBATM
NTC
LED
BAT_STAT
VIN_UVSET
VIN_OVSET
CON_SEL
TIME_SET
EP
PGND
VBAT_GND
STAT
VC
R13
82k
TH1
100k @ 3950K
R14
330
D1
LED
Charger
+BATT
R1
330
C5
100n
-BATT
U2
HY2120CB
R5
330
VC
C6
100n
VDD
VC
VSS
OD
OC
CS
R2
2k
Q1
FS8205A
G1
G2
S1
S2
D1
D2
Battery protection
+BATT
U5
TPS54308
C2
100n
L2
2.2u
+5V
C10
22u
EN
VIN
BOOT
SW
FB
GND
R6
10k
C11
22u
R7
56k
5V Buck
Sheet: /Battery/
File: battery.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.8
Id: 2/4



Sheet: /Neopixel/		
File: neopixel.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.8		Id: 3/4



Sheet: /USB Hub/		
File: usb.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.8		Id: 4/4