

**FMUSER FUQ-200E QAM Processor 112 Channels
10G-SFP+-1G-SFP GE Input DVB-C EN300-429 ITU-T J.83 A-B-C
Output Multiplexer Scrambler Modulator Web Network
Management Cable TV Headend**

Product Overview

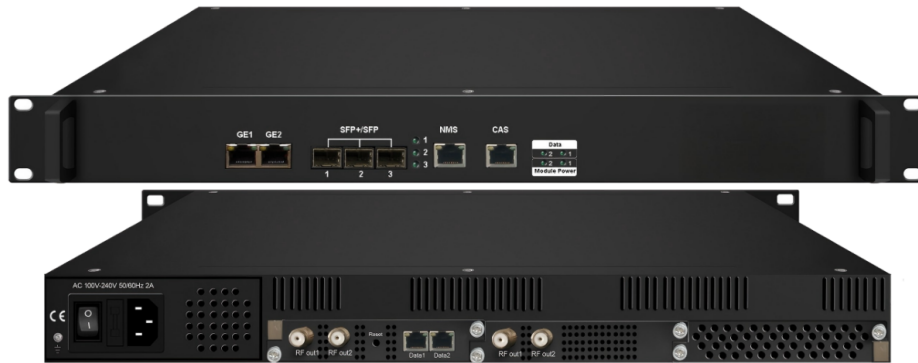


The FMUSER FUQ-200E is a 10G IP QAM processor integrating multiplexer, scrambler, and modulator functions. It processes signals through multiplexing, scrambling, and modulation, supporting up to 112 DVB-C QAM channels with 3 SFP+(10G)/SFP(1G) ports and 2 GE ports. Housed in a 1U chassis with modular card slots, it features web-based network management and is ideal for cable television headends and broadcast systems requiring high-density processing. This processor is equipped with 2 card slots to load 32ch or 48ch or 64ch QAM card. Its high density helps operators to save cost to the most extent.


Key feature

Enables web-based network management for remote monitoring and control.

Inner Principle Chart (Example: one 64qam card + one 48qam card)

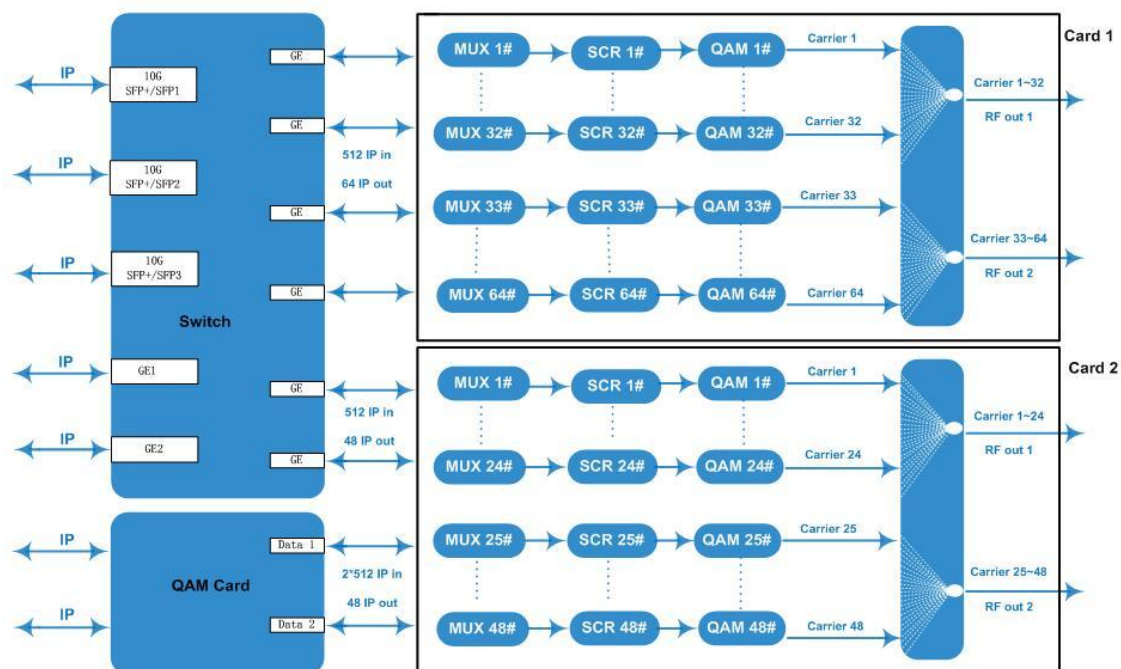

Carrier Setting Illustration (Example: 64qam card)

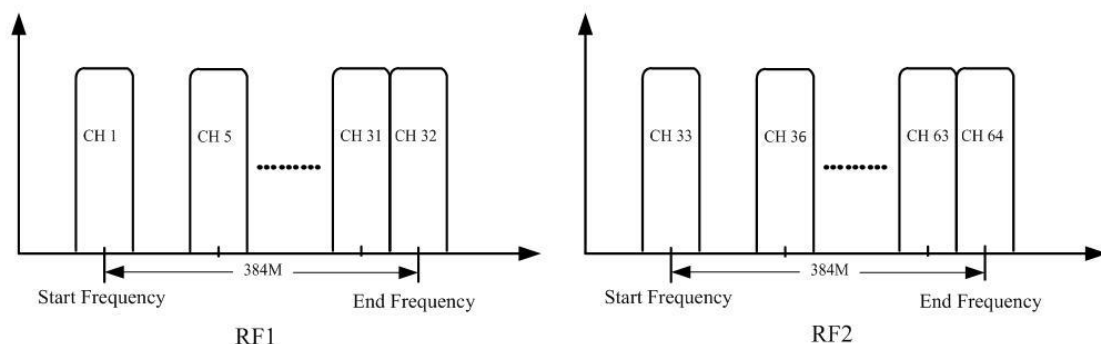

Specifications

Input	Input from Front Panel	Max 512 IP in per card through SFP+/SFP ports 1-3 and 2 GE ports	Max 512 IP in per card through SFP+/SFP ports 1-3 and 2 GE ports	Max 512 IP in per card through SFP+/SFP ports 1-3 and 2 GE ports
Input	Input from Daughter Card	2*512 IP in from 2 GE ports (SFP port optional)--32/48 QAM	2*512 IP in from 2 GE ports (SFP port optional)--32/48 QAM	2*512 IP in from 2 GE ports (SFP port optional)--32/48 QAM

Input	Transmission Rate	Max 9600Mbps for each 10G SFP+/SFP input	Max 9600Mbps for each 10G SFP+/SFP input	Max 9600Mbps for each 10G SFP+/SFP input
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Mux	Max PIDs Remapping	256 per output channel	256 per output channel	256 per output channel
Mux	Functions	PID remapping (auto/manually optional)	PID remapping (auto/manually optional)	PID remapping (auto/manually optional)
Mux	Functions	PCR accurate adjusting	PCR accurate adjusting	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating	PSI/SI table automatically generating	PSI/SI table automatically generating
Scrambling	Max simulcrypt CA	Max simulcrypt CA	6	6
Scrambling	Scramble Standard	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling	Connection	Connection	Local/remote connection	Local/remote connection
Modulation	Modulation Standard	Modulation Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation	Constellation	Constellation	J.83A	Constellation :16/32/64/128/256QAM
Modulation	Constellation	Constellation	J.83A	Bandwidth :8M
Modulation	Constellation	Constellation	J.83B/C	Constellation :64/256QAM
Modulation	Constellation	Constellation	J.83B/C	Bandwidth :6M
Modulation	QAM Channel	QAM Channel	32/48/64/96/112 non-adjacent carriers output, 384Mbps bandwidth for each RF port	32/48/64/96/112 non-adjacent carriers output, 384Mbps bandwidth for each RF port

Modulation	Symbol Rate	Symbol Rate	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)
Modulation	Constellation	Constellation	16, 32, 64, 128, 256QAM	16, 32, 64, 128, 256QAM
Modulation	FEC	FEC	RS (204, 188)	RS (204, 188)
RF Output	Interface (per card)	1 or 2 F type output ports for 32/48/64 carriers card, 75Ω. 32ch qam card : all Carrier out thru one RF port 32ch/48ch qam card : Carrier 1~16/1~24 out thru RF1, 17~32/25~48 thru RF2 64ch qam card : Carrier 1~32 out thru RF1, 33~64 thru RF2	1 or 2 F type output ports for 32/48/64 carriers card, 75Ω. 32ch qam card : all Carrier out thru one RF port 32ch/48ch qam card : Carrier 1~16/1~24 out thru RF1, 17~32/25~48 thru RF2 64ch qam card : Carrier 1~32 out thru RF1, 33~64 thru RF2	1 or 2 F type output ports for 32/48/64 carriers card, 75Ω. 32ch qam card : all Carrier out thru one RF port 32ch/48ch qam card : Carrier 1~16/1~24 out thru RF1, 17~32/25~48 thru RF2 64ch qam card : Carrier 1~32 out thru RF1, 33~64 thru RF2
RF Output	RF Range	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping
RF Output	Output Level	-20dBm~+10dB m(87~117dbμV), 0.1dB stepping	-20dBm~+10dB m(87~117dbμV), 0.1dB stepping	-20dBm~+10dB m(87~117dbμV), 0.1dB stepping
RF Output	MER	≥ 40dB	≥ 40dB	≥ 40dB
TS output	Per Daughter QAM Card	32/48/64 IP output over UDP/RTP/RTSP, unicast/multicast, through SFP+/SFP ports 1-3 or GE ports RJ45	32/48/64 IP output over UDP/RTP/RTSP, unicast/multicast, through SFP+/SFP ports 1-3 or GE ports RJ45	32/48/64 IP output over UDP/RTP/RTSP, unicast/multicast, through SFP+/SFP ports 1-3 or GE ports RJ45
System	Web-based Network management	Web-based Network management	Web-based Network management	Web-based Network management

General	Dimension	420mm×440mm ×44.5mm (W×L×H)	420mm×440mm ×44.5mm (W×L×H)	420mm×440mm ×44.5mm (W×L×H)
General	Temperature	0~45■(operation , -20~80■(storage)	0~45■(operation , -20~80■(storage)	0~45■(operation , -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz ; or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz ; or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz ; or AC 220V±10%, 50/60Hz
General	Consumption	50W(1 daughter QAM card)/75W(2 daughter QAM cards)	50W(1 daughter QAM card)/75W(2 daughter QAM cards)	50W(1 daughter QAM card)/75W(2 daughter QAM cards)

Order Guide

Options Available	Combinations
32ch QAM out	32qam card * 1
48ch QAM out	48qam card * 1
64ch QAM out	64qam card * 1
96ch QAM out	64qam card * 1 + 32qam card *1
112ch QAM out	64qam card * 1 + 48qam card *1

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)