

FMUSER FUQ-41015 Quad Decoder 4 ASI Input 4 ASI Loop-Out 4 CVBS Stereo Audio MPEG-2 PAL-NTSC Auto Switch Broadcast Transmission

Product overview



The FUQ-41015 Quad Decoder decodes MPEG2 TS signals with 4 ASI inputs and outputs 4 separate A/V signals, including ASI loop outputs. It processes signals by decoding them into audio and video formats. Housed in a compact 1U rack unit, it features modular design for reduced space and power consumption. Ideal for broadcast systems, it ensures efficient and user-friendly operation and maintenance.

Key feature


- Integrated four independent decoders in a 1U chassis
- Supports 4 ASI inputs, 4 A/V outputs, and 4 ASI loop outputs
- Features an intuitive user interface for easy operation
- Automatically switches between PAL and NTSC video standards
- Includes auto-save function to retain channel settings

Technical Specifications

Signal Input	Signal Input	4×ASI (BNC interface)
Decoding Standard	Decoding Standard	MPEG-2
Video OUT	Video OUT	4×CVBS (RCA interface)
Audio OUT	Audio OUT	4×Stereo Audio (L/R)
ASI Loop OUT	ASI Loop OUT	4×BNC interface
Miscellaneous	Management	LED /Control Buttons
Miscellaneous	Dimension	44mm×482mm×410mm
Miscellaneous	Temperature	0~45■(Operating), -20~80■(Storage)

Miscellaneous	Power	AC 90~220V, 50/60Hz, 25W
---------------	-------	--------------------------

Principle Chart

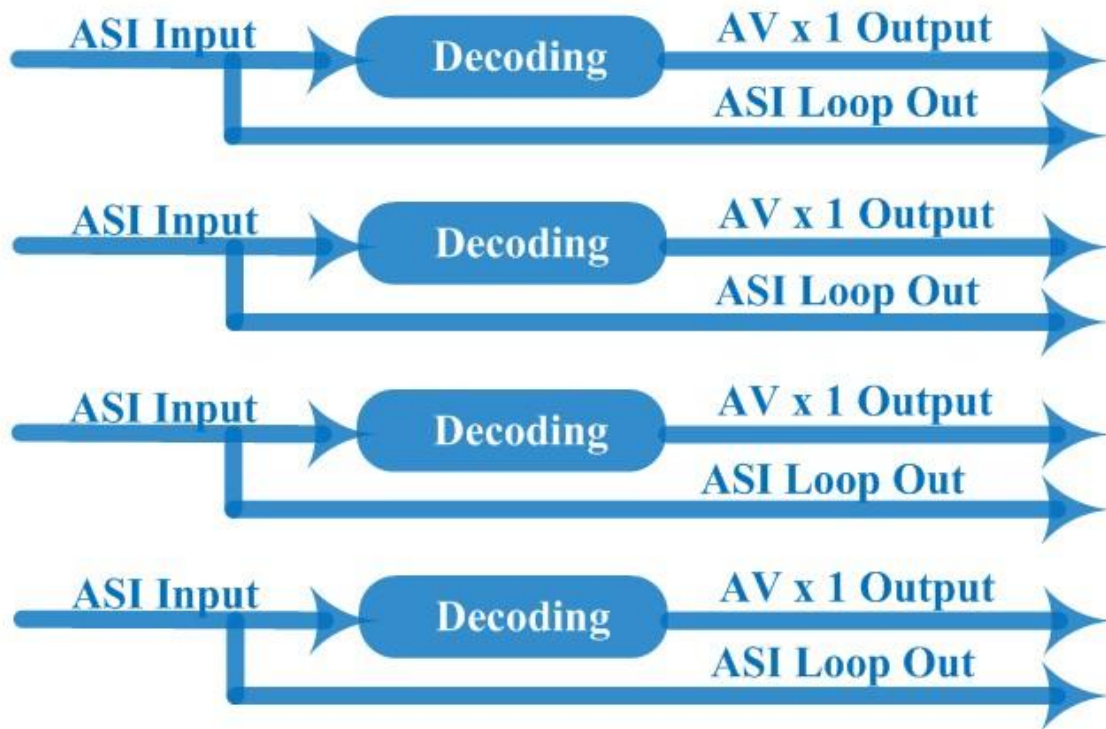

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)