


FMUSER FUQ-4412C QAM Modulator ASI-IP Input DVB-C 16-256QAM EN300 429-ITU-T J.83A-B-C PID Filtering NIT Insertion for Broadcast Satellite Product overview



The FMUSER FUQ-4412C is a QAM modulator supporting ASI and IP inputs for RF output. It processes transport streams with QAM modulation. Features include PID filtering, NIT insertion, and intelligent TS management. Ideal for broadcasting and interactive services.

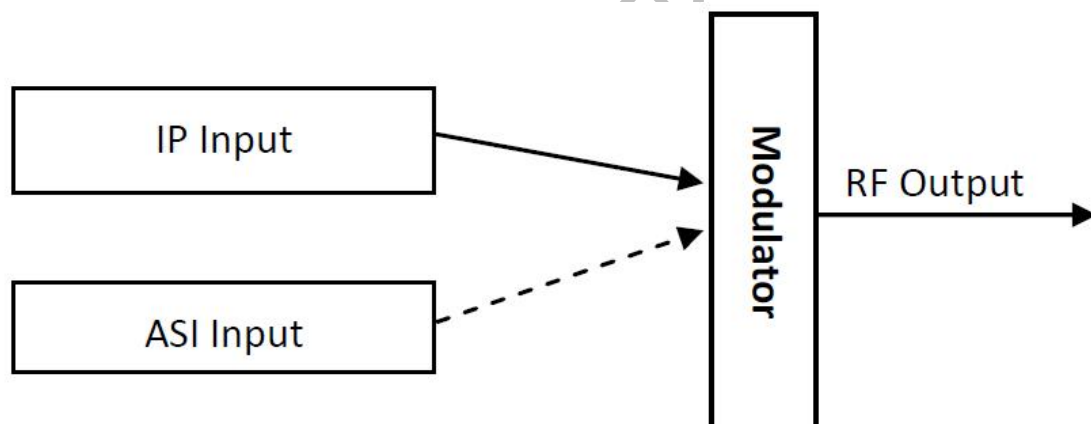

Key feature

Delivers RF output in 30–960 MHz range with 1 kHz stepping and attenuation control.

Specifications

Input	1 channel ASI input, BNC interface, 75Ω	1 channel ASI input, BNC interface, 75Ω
Input	1 channel IP (MPTS/SPTS) input over UDP (Unicast/Multicast) (100M Port)	1 channel IP (MPTS/SPTS) input over UDP (Unicast/Multicast) (100M Port)
Modulation	QAM Channel	1

Modulation	Standard	EN300 429/ITU-T J.83A/B/C, GB/T170
Modulation	Symbol Rate	5.0~7.0Msps■1ksps stepping
Modulation	Constellation	16/32/64/128/256 QAM
Modulation	FEC	RS (204, 188)
RF Output	Connector	F Type, 75Ω impedance
RF Output	RF Range	30~960MHz■1kHz Stepping
RF Output	Output Attenuation	-30dBm~0dBm, 0.5dB Stepping
System	LCD/Keyboard operating and web NMS support	LCD/Keyboard operating and web NMS support
System	Ethernet software upgrading	Ethernet software upgrading
General	Dimension(W*D*H)	482mm×300mm×44mm
General	Weight	2.3kg
General	Temperature	0~45■(Operation) ; -20~80■(Storage)
General	Power	AC 110V±10%, 50/60Hz or AC 220V±10%, 50/60Hz
General	Consumption	22W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)