

FMUSER FUQ-4512E Modulator 1 ASI Input to RF Output DVB-S QPSK RS Coding Convolution Interleaving Web-Based NMS for Broadcasting and Satellite Applications

Product overview




The FMUSER FUQ-4512E modulator performs QPSK modulation with 1 ASI input and RF output. It employs energy diffusion, RS coding, convolution interleaving, and pre-modulated baseband shaping for high transmission performance. Controlled via web-based NMS for local and remote operation, it is suitable for broadcasting, interactive services, and broadband satellite applications.

Key feature

- Complies with DVB-S (EN300421) standard,
- Supports 1 ASI input,
- Features QPSK constellations,
- Provides RF output range: 950-2150MHz with 10kHz stepping,
- Offers web-based NMS for control

Principle Chart

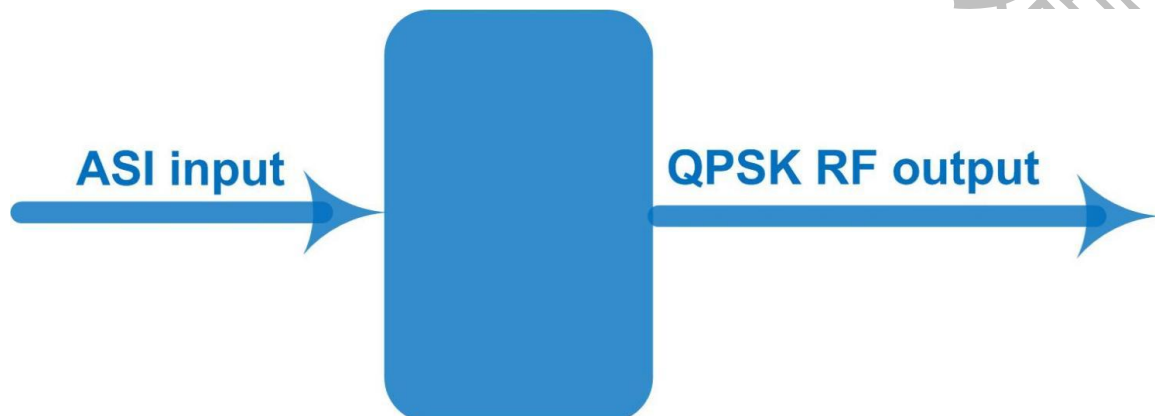

Specifications

ASI Input	1×ASI input, BNC interface	1×ASI input, BNC interface
RF Output	RF Range	950 ~ 2150 MHz, 10KHz stepping
RF Output	Output Level	-10.0 dBm~-41.5 dBm,0.5dBm Stepping
RF Output	MER	≥26dB
RF Output	Connector	N type, Impedance 50Ω
RF Output	Outer coding	RS Coding
RF Output	Inner coding	Convolution
RF Output	Constellation	QPSK
RF Output	FEC/Convolution Rate	1/2,2/3, 3/4, 5/6, 7/8
RF Output	Roll-off Factor	0.35
RF Output	Symbol Rate	0.05~45Msps
System	Web-based NMS	Web-based NMS
System	Language: English	Language: English
System	Ethernet software upgrade	Ethernet software upgrade
Miscellaneous	Dimension	482mm×245mm×44mm (W*D*H)
Miscellaneous	Temperature	0~45■(operation), -20~80■(storage)
Miscellaneous	Power	AC 100-240V, 50Hz-60Hz 2A

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227